
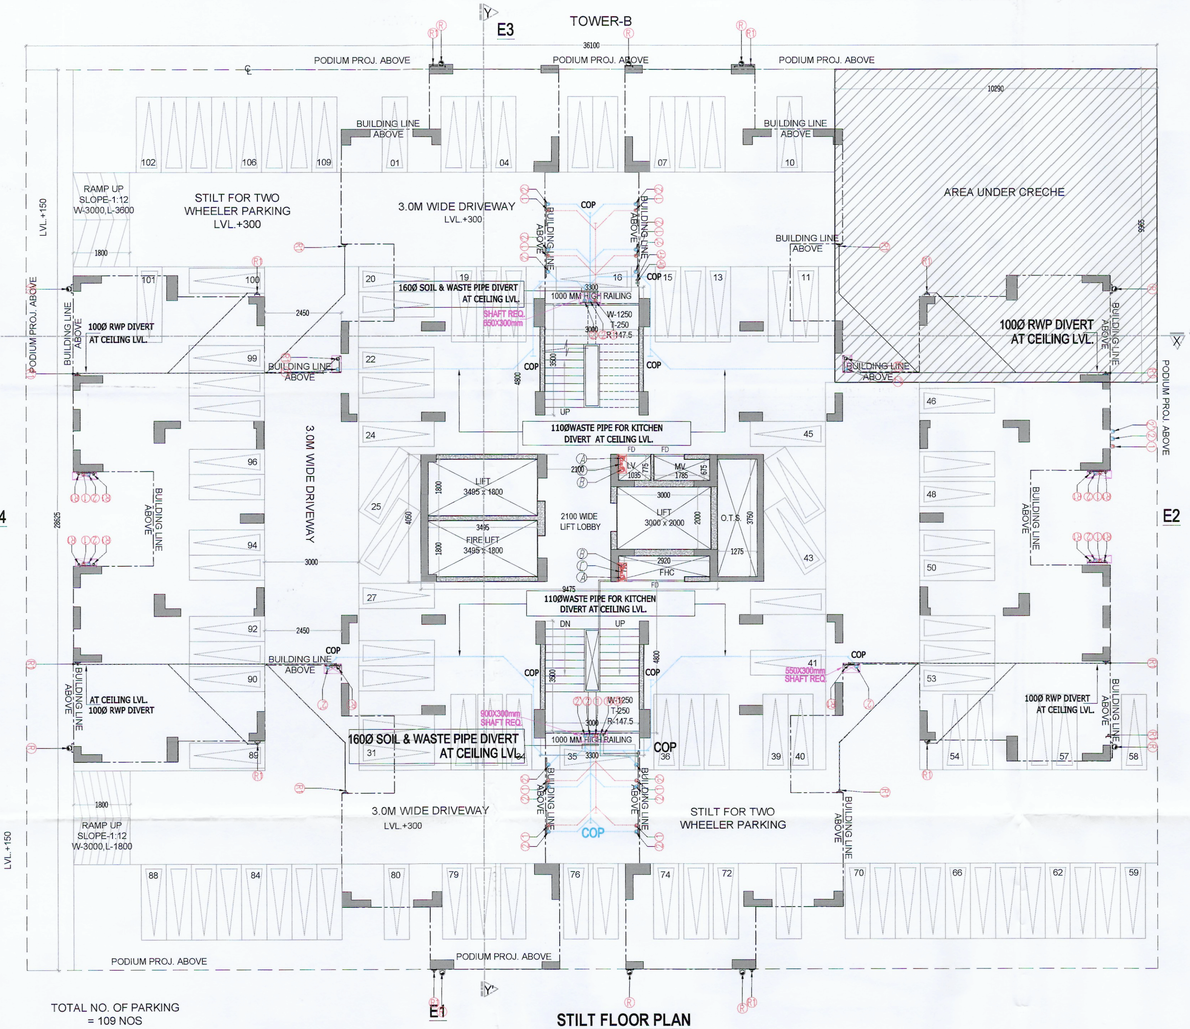


TOTAL NO. OF PARKING = 109 NOS

STILT FLOOR PLAN
TOWER- A

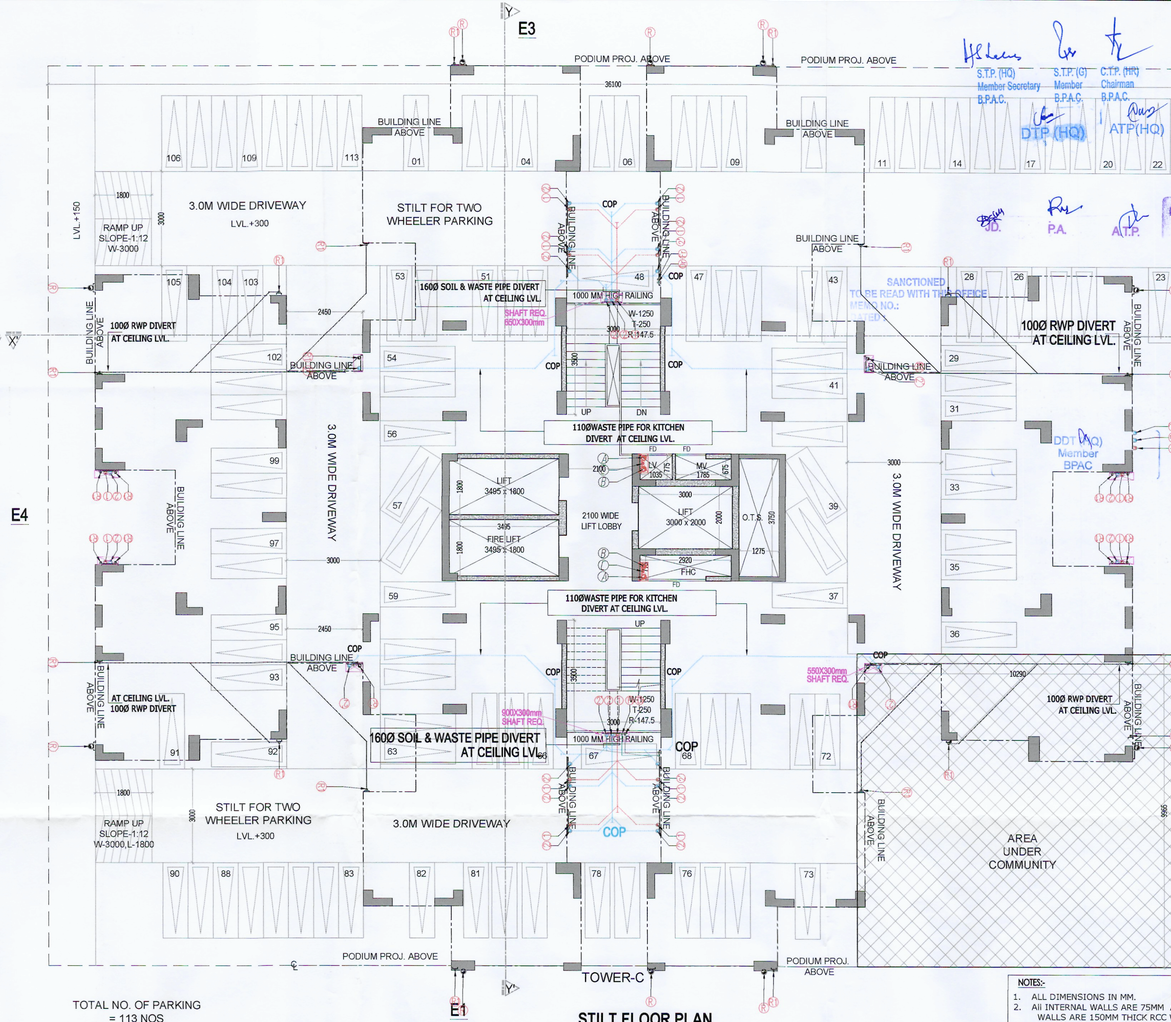


TOTAL NO. OF PARKING = 113 NOS


STILT FLOOR PLAN
TOWER- D

GROUND COVERAGE (T-A & D)					
ADDITIONS					
S.N.O.	NO.	PREFIX	LENGTH	BREATH	AREA
A	1	1	36.100	28.625	1033.363
TOTAL ADDITION					1033.363
SUBTRACTIONS					
1	1	1	1.275	3.750	4.781
TOTAL SUBTRACTION					4.781
TOTAL GROUND COVERAGE					**1028.581**

STILT FLOOR F.A.R. (T-A & D)					
ADDITIONS					
S.N.O.	NO.	PREFIX	LENGTH	BREATH	AREA
A	2	1	3.300	4.800	31.680
B	1	1	9.475	4.050	38.374
TOTAL ADDITION					70.054
TOTAL STILT FLOOR F.A.R.					**70.054**

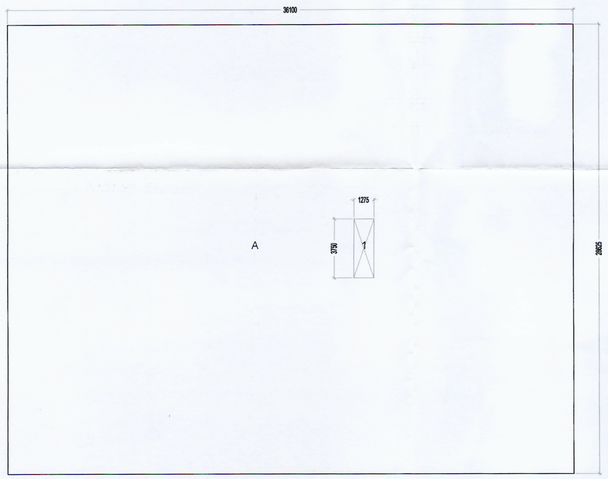

GROUND COVERAGE AREA DIAGRAM
TOWER - A & D



GROUND FL. F.A.R. AREA DIAGRAM
TOWER - A & D



AREA UNDER CRECHE
TOWER -A



AREA UNDER COMMUNITY
TOWER -D

AREA UNDER CRECHE (T-A)					
ADDITIONS					
S.N.O.	NO.	PREFIX	LENGTH	BREATH	AREA
A	1	1	10.290	9.965	102.540
TOTAL ADDITION					102.540
TOTAL AREA					**102.540**

STILT FLOOR PARKING AREA (T- A)	
ADDITIONS	
GROUND COVERAGE	1028.581
SUBTRACTIONS	
STILT FLOOR F.A.R.	70.054
AREA UNDER COMMUNITY	102.540
TOTAL SUBTRACTION	172.594
TOTAL STILT PARKING (NON F.A.R.)	**855.988**

AREA UNDER COMMUNITY (T-D)					
ADDITIONS					
S.N.O.	NO.	PREFIX	LENGTH	BREATH	AREA
A	1	1	10.290	9.965	102.540
TOTAL ADDITION					102.540
TOTAL AREA					**102.540**

STILT FLOOR PARKING AREA (T- D)	
ADDITIONS	
GROUND COVERAGE	1028.581
SUBTRACTIONS	
STILT FLOOR F.A.R.	70.054
AREA UNDER COMMUNITY	102.540
TOTAL SUBTRACTION	172.594
TOTAL STILT PARKING (NON F.A.R.)	**855.988**

Checked and found ok for Public Health (Internal) Service only subject to comments in forwarding letter No. 3835/1...Dtd...19/12/2024

Superintending Engineer (HQ) for Chief Engineer-I HSVP, Panchkula

FIRE FIGHTING LEGEND:-	
A	150Ø SPRINKLER PIPE
B	150Ø FIRE HYDRANT PIPE
C	80Ø DRAIN PIPE
	CO2 FIRE EXTINGUISHER 4.5 Kg CAP ISI MARKED
	WATER CO2 FIRE EXTINGUISHER 9LTR CAP ISI MARKED
FHC	FIRE HOSE CABINET

PLUMBING LEGEND:-	
①	**110 OD uPVC SOIL & VENT PIPE**
②	**110 OD uPVC WASTE & VENT PIPE**
③	**75 OD uPVC VENT PIPE**
④	DOMESTIC WATER SUPPLY UPPER TWO FLOOR
⑤	DOMESTIC WATER SUPPLY
⑥	FLUSHING WATER SUPPLY
⑦	DOMESTIC WATER SUPPLY RISER
⑧	FLUSHING WATER SUPPLY RISER
⑨	110 OD uPVC RAIN WATER PIPE
⑩	75 OD uPVC RAIN WATER PIPE FOR BALCONY DRAIN
FT	FLOOR TRAP
FD	FLOOR DRAIN
COP	CLEAN OUT PLUG

LEGEND:-
- STRUCTURAL WALL/COLUMN
- 150mm R.C.C. NON STRUCTURAL WALL
- 75mm R.C.C. NON STRUCTURAL WALL
- 100mm R.C.C. NON STRUCTURAL WALL

DOOR WINDOW SCHIDULE :-

NAME	WIDTH	HEIGHT	CILL	LINTEL
DW1	1675	2450	600	2450
DW2	2000	2450	600	2450
DW3	1500	2450	1050	2450
DW4	1435	2450	600	2450
DW5	1800	2450	1050	2450
DW6	2275	2450	600	2450
DW7	2600	2450	600	2450
D1	1050	2450	---	2450
D2	900	2150	---	2150
D3	750	2150	---	2150
V1/PV	600	2450	1500	2450

S.T.P. (HQ) Member Secretary B.P.A.C. — S.T.P. (G) Member B.P.A.C. — C.T.P. (HQ) Chairman B.P.A.C.
DTP (HQ) — ATP(HQ) — JD. — P.A. — ATP. — Ram Avtar Bassi JD(HQ)
SANCTIONED TO BE READ WITH THE OFFICE MEMO NO.: DTP (HQ) Member BPAC

NOTES:-
1. ALL DIMENSIONS IN MM.
2. All INTERNAL WALLS ARE 75MM AND EXTERNAL WALLS ARE 150MM THICK RCC WALL.
3. LIFT SHALL BE WITH 100% POWER BACKUP.
4. D1 ARE 1 HOUR FIRE RATED DOOR.

PROJECT:-
PROPOSED BUILDING PLAN FOR AN ADDITIONAL AREA MEASURING 1.375 ACRES (LICENCE NO-269 OF 2023 DATED-28-12-2023) IN THE ALREADY LICENCE GRANTED FOR AFFORDABLE GROUP HOUSING COLONY MEASURING 8.309 ACRES (LICENCE NO.235 OF 2023 DATED 02.11.2013), TOTAL AREA MEASURING 9.684 ACRES IN SECTOR-36, SOHNA, DISTRICT GURUGRAM BEING DEVELOPED BY 4S DEVELOPERS PVT. L T D .

ARCHITECT :-
VIKAS AHLAWAT ARCHITECTS
ARCHITECTURE , INTERIORS , PLANNING
Unit No.303,Nirvex Time Center, Suncity,Sector -54,Golf Course Road,Gurgaon
O :- 0124-4284293 M:- 0-9899158486 Mail :- ar.vikas.ahlawat@gmail.com

OWNERS SIGNATURE:- For 4S Developers Pvt. Ltd. Authorised Signatory

ARCHITECT SIGNATURE:- Ar. VIKAS AHLAWAT CA/2013/59929

DRAWING TITLE :
TOWER A & TOWER-D (MIRROR OF TOWER-A)
STILT FLOOR PLAN & AREA CALCULATION

DATE:- JAN-2024
SCALE:- 1:80 (A1)
SHEET NO. T-AD-01