


TYPICAL FLOOR F.A.R. (2nd TO 28th FLOOR) - FOR BLOCK E				
NO.	BREADTH	LENGTH	No.s	AREA in SqM
ADDITIONS				
A	4.600	1.750	1	8.050
B	38.850	9.400	1	3657.070
C	1.000	2.600	2	5.200
D	4.950	0.650	2	6.435
TOTAL ADDITIONS				377.355
SUBTRACTIONS				
1	1.100	1.550	2	3.4100
2	1.450	1.550	2	4.5500
3	4.350	0.450	2	3.915
4	1.100	0.700	1	0.770
5	0.550	0.370	1	0.204
6	0.550	0.900	1	0.4950
7	1.900	2.500	1	4.7500
8	1.900	3.000	1	5.7000
9	1.900	0.300	1	0.5700
10	4.000	0.315	1	1.260
11	1.350	1.200	2	3.240
12	3.100	0.785	2	4.867
TOTAL SUBTRACTIONS				33.531
TOTAL COVERED AREA				343.825

TOTAL FLOOR AREA FOR BLOCK E		
S.NO.	50 NO. OF DWELLING UNITS PROPOSED FLOOR	AREA in sqm
1	PROPOSED GROUND/FIRST FLOOR	241.824
2	PROPOSED FIRST FLOOR	211.480
3	PROPOSED SECOND FLOOR	343.825
4	PROPOSED THIRD FLOOR	343.825
5	PROPOSED FOURTH FLOOR	343.825
6	PROPOSED FIFTH FLOOR	343.825
7	PROPOSED SIXTH FLOOR	343.825
8	PROPOSED SEVENTH FLOOR	343.825
9	PROPOSED EIGHTH FLOOR	343.825
10	PROPOSED NINTH FLOOR	343.825
11	PROPOSED TENTH FLOOR	343.825
12	PROPOSED ELEVENTH FLOOR	343.825
13	PROPOSED TWELFTH FLOOR	343.825
14	PROPOSED THIRTEENTH FLOOR	343.825
15	PROPOSED FOURTEENTH FLOOR	343.825
16	PROPOSED FIFTEENTH FLOOR	343.825
17	PROPOSED SIXTEENTH FLOOR	343.825
18	PROPOSED SEVENTEENTH FLOOR	343.825
19	PROPOSED EIGHTEENTH FLOOR	343.825
20	PROPOSED NINETEENTH FLOOR	343.825
21	PROPOSED TWENTIETH FLOOR	343.825
22	PROPOSED TWENTY FIRST FLOOR	343.825
23	PROPOSED TWENTY SECOND FLOOR	343.825
24	PROPOSED TWENTY THIRD FLOOR	343.825
25	PROPOSED TWENTY FOURTH FLOOR	343.825
26	PROPOSED TWENTY FIFTH FLOOR	343.825
TOTAL FLOOR AREA FOR BLOCK E		8714.992

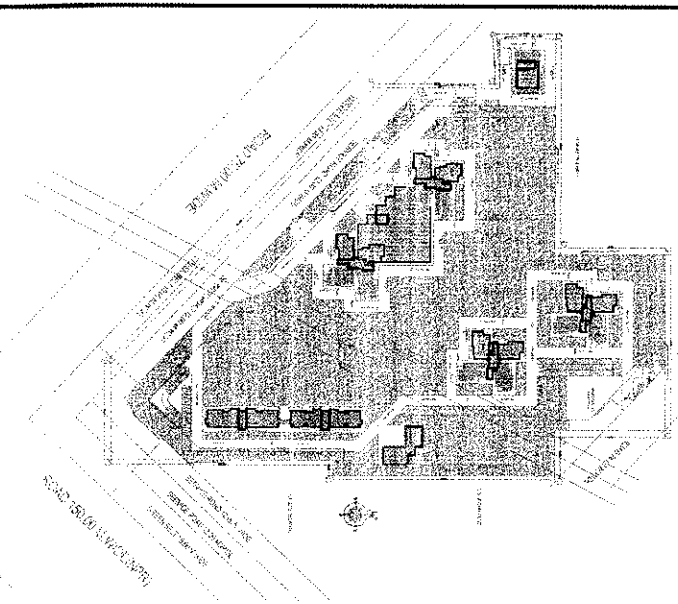

Key Plan

- | Notes |
|--|
| 1. ALL LIFTS SHALL HAVE LINE POWER BACKUP |
| 2. ALL ELECTRICAL INSTALLATIONS SHALL BE AS PER PROVISIONS OF PER. |
| 3. VENTILATION IN BASEMENTS SHALL BE AS PER RELEVANT PER PROVISIONS 12-15 FOR CHARGES PER HOUR FOR MECH PROVISIONS 12-15 AND CHARGES PER HOUR FOR MECH PROVISION 30 AND CHARGES PER HOUR FOR OPERATIONAL CASE OF PER |
| 4. FIRE-FIGHTING SAFETY PROVISIONS WILL BE AS PER RELEVANT PER PROVISIONS |
| 5. BUILDING STRUCTURE DESIGNED FOR 40MM QUAKE RESISTANT |
| 6. ALL PUMPS ARE IN 110 TO 120 GPM CAPS & 120 TOR |
| 7. 20MM WIDE MAIN DRAINS PERIOD |
| 8. WINDPROOF AND BLOODS PROOF |
| 9. EXTERIOR WALLS & 100MM WIDE MAIN DRAINS SHALL BE USED FOR INTERIOR WALLS |
| 10. KITCHEN & TOILET DRAINS NOT PROVIDED |
| 11. REFRIGERANT & VENTILATED |

SANCTIONED

To be read in conjunction with 111

Om	
----	--

BA
Cou
Reg

Signature _____

2008-09-20

18

[illegible]