

LOWER GROUND FLOOR LVL FRAMING PLAN
(ROOF OF BASEMENT-01)
(SCALE 1:200)

SCHEDULE OF BEAM SIZE (WIDTH & DEPTH)

MARK	SIZE
(a)	450x600
(b)	300x450
(c)	750x450
(d)	900x450
(e)	600x450
(f)	200x450
(g)	230x450

* INCLUDING SLAB THICKNESS

LEGENDS

	HATCH INDICATE COLUMN CONNECTIONS
	HATCH INDICATE COLUMN/SHAFT WALL TERMINATE
	HATCH INDICATE SLAB COLUMN

THIS DRAWING IS PROPERTY OF PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT LTD AND SHALL NOT BE REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.

GENERAL INSTRUCTION & NOTES:-

- ALL DIMENSIONS SHOWN ARE IN MM. (UNLESS MENTIONED).
- ALWAYS FOLLOW WRITTEN DIMENSIONS ONLY. DO NOT MEASURE ANY DIMENSION.
- THIS DRAWING SHALL BE READ WITH GENERAL NOTES ISSUED IN DRAWING No- [5317-13-101A]
- [500-D] COMPLIANCE TO IS : 1786 (LATEST REVISION) SHALL BE USED FOR ALL REINFORCEMENT BARS.
- FOR CONCRETE WORK USE CONCRETE GRADE OF M25 COMPLIANCE TO IS : 456 (LATEST REVISION) (UNLESS MENTIONED).
- INDICATES SLAB THICKNESS.
- INDICATES SLAB PANEL NO. FOR R/F. DETAILS
- U/7 INDICATES PARTIALLY OR FULLY UP/LIFTED BEAM
- FOR SLAB REINFORCEMENT DETAILS REFER DRAWING No.- [5317-21-602A]
- FOR BEAM REINFORCEMENT DETAILS REFER DRAWING No.- [5317-21-702A]
- STAR/CASE/RAMPS DETAILS SHALL BE REFERRED FROM RELEVANT ARCHITECTURAL AND STRUCTURAL DRAWINGS.
- ALL LEVEL MENTIONED IN FRAMING PLAN SHALL BE CROSS CHECKED WITH RELEVANT ARCHITECTURAL DRAWINGS.
- CLEAR COVER TO CONCRETE SHALL BE AS FOLLOWS BEAMS - 25MM (ALL SIDES) FROM FACE OF STRIPS SLABS - 20MM (TOP & BOTTOM)

SPECIAL NOTES:-

- MILD STEEL CIRCULAR SLEEVE SHALL BE PROVIDED (IF REQUIRED) IN BEAMS AT THE TIME OF CASTING ONLY. ADDITIONAL REINFORCEMENT SHALL BE PROVIDED NEAR SLAB & BEAM OPENING AS PER GIVEN DETAILS
- BEAMS SHALL BE PLACED TO COLUMN FACE OR AS PER MASONRY WALL LAYOUT GIVEN IN ARCHITECTURAL DRAWING OR AS PER DIMENSIONS GIVEN IN FRAMING PLAN. ALL SECONDARY BEAMS SHALL BE PLACED EQUALLY IN BETWEEN PRIMARY BEAMS (UNLESS MENTIONED).
- ALL SUNKEN AREAS AND SUNKEN DEPTH SHALL BE BASED ON INPUTS FROM ARCHITECTURAL DRAWINGS AND SERVICE CONSULTANTS. ALL SUNKEN AREAS SHALL BE FILLED WITH LIGHT WEIGHT MATERIAL OF DENSITY NOT MORE THAN 1000KG/M³
- DOWEL BARS FOR ELEVATION FEATURE/ FUTURE CONSTRUCTION SHALL BE PROVIDED WHILE CASTING WITH PROPER SHEAR KEY.
- FOR THE PURPOSE OF LOADING, MASONRY UNIT CONSIDERED AS MAC BLOCK - CUMULATIVE DENSITY OF 1000KG/M³
- BASED ON ARCHITECTURAL DRAWINGS MASONRY LAYOUT HAS BEEN SHOWN ON FRAMING PLAN FOR REFERENCE ONLY. ANY DEVIATION SHALL BE BROUGHT IN NOTICE OF STRUCTURAL CONSULTANT
- ALL MASONRY WALL ERECTION SHALL BE DONE AS PER DRAWING No.- [5317-14-101A3]
- CONSTRUCTION MATERIAL SHALL NOT BE STACKED ON FLOOR SLAB BEYOND LIFE LOAD CAPACITY OF SLAB.
- PRE CAMBER IN SHOTCRETE SHALL BE PROVIDED AS MENTIONED IN FRAMING PLAN

- ALL CONSTRUCTION JOINTS SHALL BE PLANNED BY SITE TEAM AND SHALL BE SEND TO STRUCTURAL CONSULTANT FOR APPROVAL PRIOR TO EXECUTION. NO CONSTRUCTION JOINTS SHALL BE PROVIDED FOR COUNTERLEVER PROJECTIONS
- CONTRACTOR TO EVALUATE LOADING FROM UPPER FLOOR (DURING ITS CASTING) AND PROVIDE REQUIRED PROPOS TO LOWER SLAB LEVELS ACCORDINGLY.
- FLOOR SLAB AND BEAM DESIGNED FOR FOLLOWING LOADING:-
 - A. LIVE LOAD CONSIDERED - $\frac{4KN}{M^2}$
 - B. FLOOR FINISH THICKNESS - 75MM

ARCHITECT :-

PROPOSED BUILDING PLAN OF COMMERCIAL COLONY AREA MEASURING 3.78125 ACRES (LICENCE NO. 93 DATED 12/11/2021) IN SECTOR-89, GURURAM BEING DEVELOPED BY COPIOUS REALTORS PVT. LTD.

REV. NO.	DESCRIPTION	DATE

ARCHITECT :-

GIANT P. MATHEER AND ASSOCIATES (P) LTD.
ARCHITECTS
C-55, East of Kailash, New Delhi-110045
P/PLANSKINS E: info@pmaia.com | W: www.pmaia.com

STRUCTURAL CONSULTANT :-

PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD.

DRAWING TITLE	LOWER GROUND FLOOR LVL FRAMING PLAN
DRAWING NO. :-	5 5 1 7 2 1 5 0 2 A
SCALE:	AS SHOWN
DATE:	18.08.2022
DESIGNED BY:	SJ
APPROVED BY:	AGU
STATUS :-	FOR SUBMISSION
REVISION NO. :-	RO

PERCEPTIVE IDEAS CONSULTING ENGINEERS

C-486, GROUND FLOOR,
C.R. PARK, NEW DELHI - 110019
P-011 - 40455638/39 E:info@perceptiveideas.org
PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD.



GENERAL INSTRUCTION & NOTES:-

- ALL DIMENSIONS SHOWN ARE IN MM. (UNLESS MENTIONED).
- ALWAYS FOLLOW WRITTEN DIMENSIONS ONLY. DO NOT MEASURE ANY DIMENSION.
- THIS DRAWING SHALL BE READ WITH GENERAL NOTES ISSUED IN DRAWING No. - [5517-13-107A REVISION] SHALL BE USED FOR ALL REINFORCEMENT BARS.
- [FE 500-D] COMPLIANCE TO IS : 1786 (LATEST REVISION) SHALL BE USED FOR ALL REINFORCEMENT BARS.
- FOR CONCRETE WORK USE CONCRETE GRADE OF M25 COMPLIANCE TO IS : 456 (LATEST REVISION) (UNLESS MENTIONED).
- INDICATES SLAB THICKNESS.
- INDICATES SLAB PANEL NO. FOR R/F. DETAILS U/7 INDICATES PARTIALLY OR FULLY UPTURN BEAM FOR SLAB REINFORCEMENT DETAILS REFER DRAWING No. - [5517-21-606A]
- FOR BEAM REINFORCEMENT DETAILS REFER DRAWING No. - [5517-21-706A]
- STAIRCASE/RAMP DETAILS SHALL BE REFERRED FROM RELEVANT ARCHITECTURAL AND STRUCTURAL DRAWINGS.
- ALL LEVEL MENTIONED IN FRAMING PLAN SHALL BE CROSS CHECKED WITH RELEVANT ARCHITECTURAL DRAWINGS.
- CLEAR COVER TO CONCRETE SHALL BE AS FOLLOWS: BEAMS - 25MM (ALL SIDES) FROM FACE OF STIRRUPS SLABS - 20MM (TOP & BOTTOM)

SPECIAL NOTES:-

- MILD STEEL CIRCULAR SLEEVE SHALL BE PROVIDED (IF REQUIRED) IN BEAMS AT THE TIME OF CASTING ONLY. ADDITIONAL REINFORCEMENT SHALL BE PROVIDED NEAR SLAB & BEAM OPENING AS PER GIVEN DETAILS
- BEAMS SHALL BE PLACED TO COLUMN FACE OR AS PER MASONRY WALL LAYOUT GIVEN IN ARCHITECTURAL DRAWING OR AS PER DIMENSIONS GIVEN IN FRAMING PLAN. ALL SECONDARY BEAMS SHALL BE PLACED EQUALLY IN BETWEEN PRIMARY BEAMS (UNLESS MENTIONED).
- ALL SUNKEN AREAS AND SUNKEN DEPTH SHOWN ARE BASED ON INPUTS FROM ARCHITECTURAL DRAWINGS AND SERVICE CONSULTANTS. ALL SUNKEN AREAS SHALL BE FILLED WITH LIGHT WEIGHT MATERIAL OF DENSITY NOT MORE THAN 1000KG/M³.

- DOVEL BARS FOR ELEVATION FEATURE/ FUTURE CONSTRUCTION SHALL BE PROVIDED WHILE CASTING WITH PROPER SHEAR KEY.
- FOR THE PURPOSE OF LOADING, MASONRY UNIT CONSIDERED AS AAC BLOCK - CUMULATIVE DENSITY OF 1000KG/M³.
- BASED ON ARCHITECTURAL DRAWINGS MASONRY LAYOUT HAS BEEN SHOWN ON FRAMING PLAN FOR REFERENCE ONLY. ANY DEVIATION SHALL BE BROUGHT IN NOTICE OF STRUCTURAL CONSULTANT
- ALL MASONRY WALL ERECTION SHALL BE DONE AS PER DRAWING No. - [5517-14-101AB]
- CONSTRUCTION MATERIAL SHALL NOT BE STACKED ON FLOOR SLAB BEYOND LINE LOAD CAPACITY OF SLAB.
- PRE CAMBER IN SHUTTERING SHALL BE PROVIDED AS MENTIONED IN FRAMING PLAN

- ALL CONSTRUCTION JOINTS SHALL BE PLANNED BY SITE TEAM AND SHALL BE SEND TO STRUCTURAL CONSULTANT FOR APPROVAL PRIOR TO EXECUTION. NO CONSTRUCTION JOINTS SHALL BE PROVIDED FOR CANTILEVER PROJECTIONS
- CONTRACTOR TO EVALUATE LOADING FROM UPPER FLOOR (DURING ITS CASTING) AND PROVIDE REQUIRED PROPOS TO LOWER SLAB LEVELS ACCORDINGLY.
- FLOOR SLAB AND BEAM DESIGNED FOR FOLLOWING LOADINGS:


- A. LIVE LOAD CONSIDERED - [RKK/M²]
- B. FLOOR FINISH THICKNESS - 75MM

REV. NO.	DESCRIPTION	DATE

PROJECT:-
 PROPOSED BUILDING PLAN OF COMMERCIAL COLONY AREA MEASURING 3.78125 ACRES (LICENCE NO. 93 DATED 12/11/2021) IN SECTOR-89, GURUGRAM BEING DEVELOPED BY COPIOUS REALTORS PVT. LTD.

ARCHITECT :-
 GRAN P. MATHER AND ASSOCIATES (P) LTD.
 C-55, East of Kailash, New Delhi-110065
 ARCHITECTS
 P: +91 11 46099911 F: +91 11 46099912
 (A PLANNER) E: info@granmather.com I.V. : www.granmather.com

DRAWING TITLE		SECOND FLOOR LVL FRAMING PLAN	
DRAWING NO. :-	5 5 1 7 2 1 5 10 5 A	SHEET NO. :-	01 OF 02
SCALE:	AS SHOWN	DATE:	18.08.2022
DRAWN BY:	HSR	DESIGNED BY:	SJ
APPROVED BY:-		AGU	
STATUS :-	FOR SUBMISSION	REVISION NO. :-	RO

STRUCTURAL CONSULTANT :-

PERCEPTIVE IDEAS CONSULTING ENGINEERS
 C-486, GROUND FLOOR,
 C.R. PARK, NEW DELHI - 110019
 P:011-40455638/39 E:info@perceptiveideas.org
 PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD.



SCHEDULE OF BEAM SIZE (WIDTH & DEPTH)

MARK	SIZE
(a)	450x600
(b)	300x450
(c)	750x600
(d)	900x600
(e)	600x600
(f)	200x600
(g)	230x600

* INCLUDING SLAB THICKNESS

SECOND FLOOR LVL FRAMING PLAN (SCALE: 1:300)



- GENERAL INSTRUCTION & NOTES:-**
- ALL DIMENSIONS SHOWN ARE IN MM. (UNLESS MENTIONED).
 - ALWAYS FOLLOW WRITTEN DIMENSIONS ONLY. DO NOT MEASURE ANY DIMENSION.
 - THIS DRAWING SHALL BE READ WITH GENERAL NOTES ISSUED IN DRAWING No. **5517-13-101A**
 - [EE-500-D]** COMPLIANCE TO IS : 1786 (LATEST REVISION) SHALL BE USED FOR ALL REINFORCEMENT BARS.
 - FOR CONCRETE WORK USE CONCRETE GRADE OF M25 COMPLIANCE TO IS : 456 (LATEST REVISION) (UNLESS MENTIONED).
 - INDICATES SLAB THICKNESS.
 - INDICATES PANEL NO. FOR R/F. DETAILS
 - U/T INDICATES PARTIALLY OR FULLY UPTURN BEAM
 - FOR SLAB REINFORCEMENT DETAILS REFER DRAWING No. **5517-21-606A**
 - FOR BEAM REINFORCEMENT DETAILS REFER DRAWING No. **5517-21-706A**
 - STAIRCASE/RAMP'S DETAILS SHALL BE REFERRED FROM RELEVANT ARCHITECTURAL AND STRUCTURAL DRAWINGS.
 - ALL LEVEL MENTIONED IN FRAMING PLAN SHALL BE CROSS CHECKED WITH RELEVANT ARCHITECTURAL DRAWINGS.
 - CLEAR COVER TO CONCRETE SHALL BE AS FOLLOWS
BEAMS-**25MM** (ALL SIDES) FROM FACE OF STIRRUPS
SLABS-**20MM** (TOP & BOTTOM)

- SPECIAL NOTES:-**
- MILD STEEL CIRCULAR SLEEVE SHALL BE PROVIDED (IF REQUIRED) IN BEAMS AT THE TIME OF CASTING ONLY.
 - ADDITIONAL REINFORCEMENT SHALL BE PROVIDED NEAR SLAB & BEAM OPENING AS PER GIVEN DETAILS
 - BEAMS SHALL BE PLACED TO COLUMN FACE OR AS PER MASONRY WALL LAYOUT GIVEN IN ARCHITECTURAL DRAWING OR AS PER DIMENSIONS GIVEN IN FRAMING PLAN. ALL SECONDARY BEAMS SHALL BE PLACED EQUALLY IN BETWEEN PRIMARY BEAMS (UNLESS MENTIONED).
 - ALL SUNKEN AREAS AND SUNKEN DEPTH SHOWN ARE BASED ON INPUTS FROM ARCHITECTURAL DRAWINGS AND SERVICE CONSULTANTS. ALL SUNKEN AREAS SHALL BE FILLED WITH LIGHT WEIGHT MATERIAL OF DENSITY NOT MORE THAN 1000KG/M³.
 - DOWEL BARS FOR ELEVATION FEATURE/ FUTURE CONSTRUCTION SHALL BE PROVIDED WHILE CASTING WITH PROPER SHEAR KEY.
 - FOR THE PURPOSE OF LOADING, MASONRY UNIT
 - CONSIDERED AS AAC BLOCK - **CUMULATIVE DENSITY OF 1000KG/M³**.
 - BASED ON ARCHITECTURAL DRAWINGS MASONRY LAYOUT HAS BEEN SHOWN ON FRAMING PLAN FOR REFERENCE ONLY. ANY DEVIATION SHALL BE BROUGHT IN NOTICE OF STRUCTURAL CONSULTANT
 - ALL MASONRY WALL ERECTION SHALL BE DONE AS PER DRAWING No. **5517-14-01A,B**
 - CONSTRUCTION MATERIAL SHALL NOT BE STACKED ON FLOOR SLAB BEYOND LIVE LOAD CAPACITY OF SLAB.
 - PRE CAMBER IN SHUTTERING SHALL BE PROVIDED AS MENTIONED IN FRAMING PLAN
 - ALL CONSTRUCTION JOINTS SHALL BE PLANNED BY SITE TEAM AND SHALL BE SEND TO STRUCTURAL CONSULTANT FOR APPROVAL PRIOR TO EXECUTION. NO CONSTRUCTION JOINTS SHALL BE PROVIDED FOR CANTILEVER PROJECTIONS
 - CONTRACTOR TO EVALUATE LOADING FROM UPPER FLOOR (DURING ITS CASTING) AND PROVIDE REQUIRED PROPOS LOWER SLAB LEVELS ACCORDINGLY.
 - FLOOR SLAB AND BEAM DESIGNED FOR FOLLOWING LOADING:
 - A. LIVE LOAD CONSIDERED - **5KN/M²**
 - B. FLOOR FINISH THICKNESS - **75MM**

THIS DRAWING IS PROPERTY OF PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD.

REV. NO.	DESCRIPTION	DATE


PROJECT:-
 PROPOSED BUILDING PLAN OF
 COMMERCIAL COLONY AREA MEASURING
 3.78125 ACRES (LICENCE NO. 93 DATED
 12/11/2021) IN SECTOR-69, GURUGRAM
 BEING DEVELOPED BY COPIOUS
 REALTORS PVT. LTD.

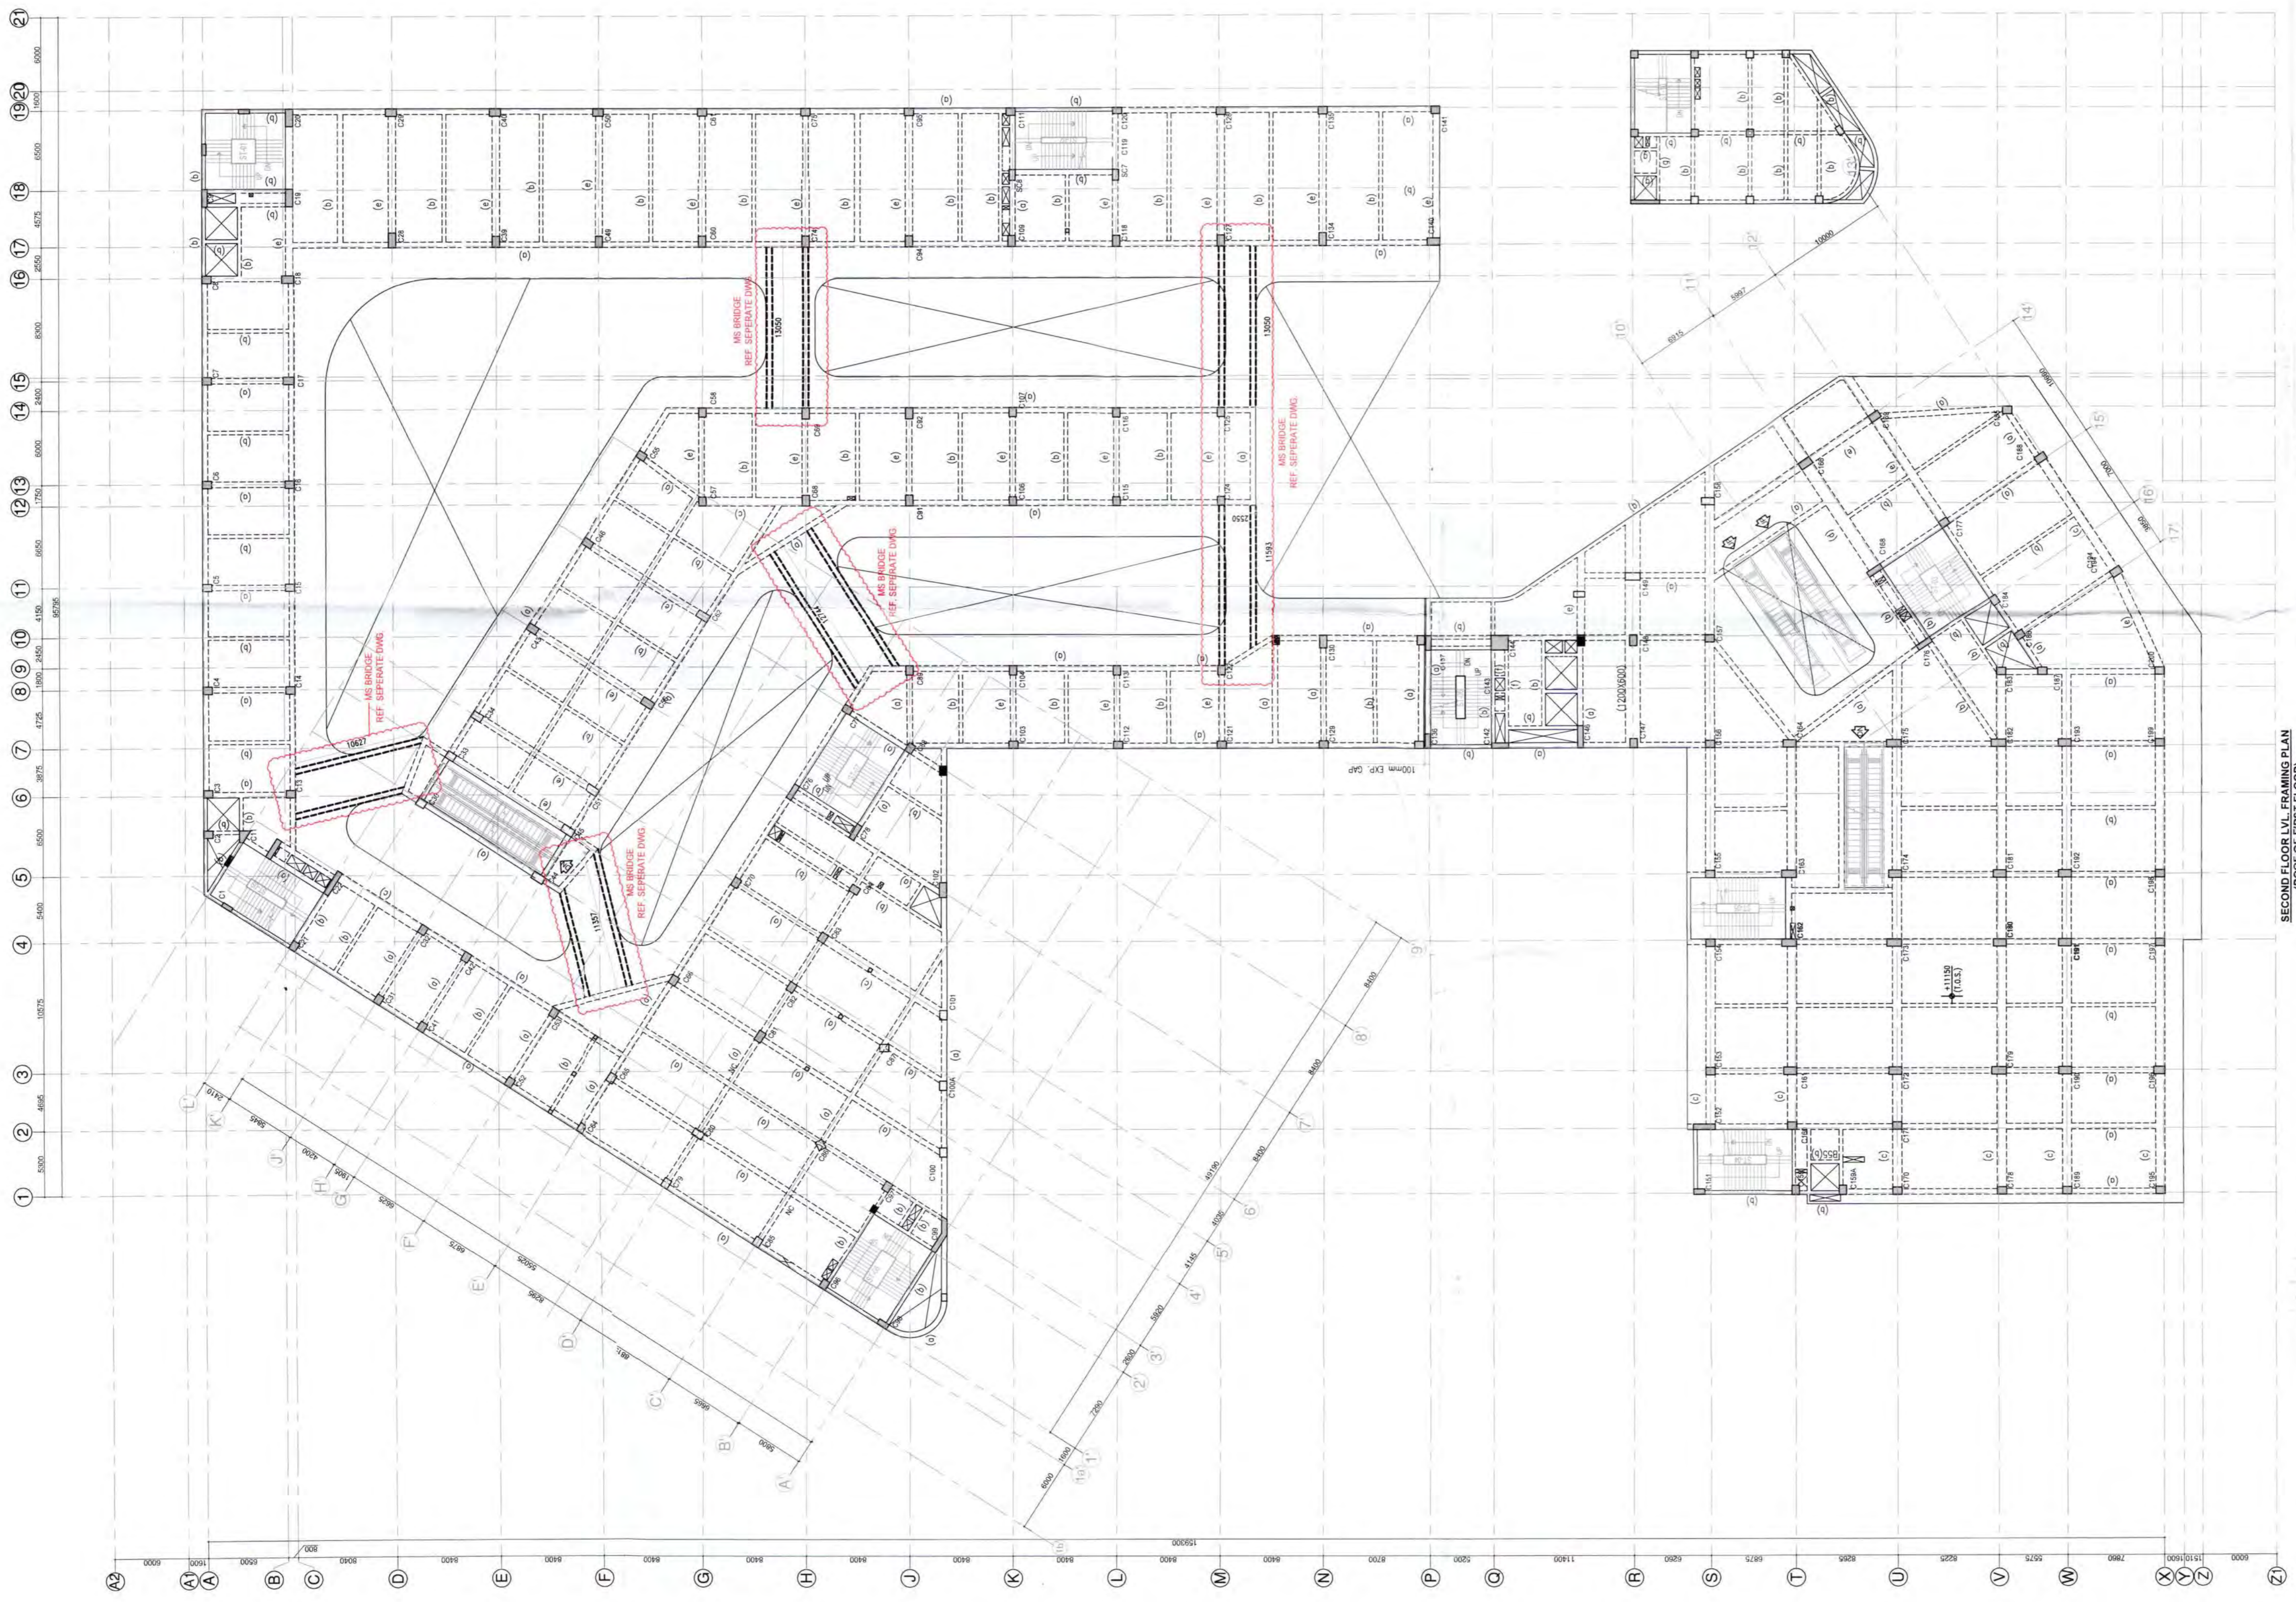
ARCHITECT :-

 GIAN P. MATHER AND ASSOCIATES (P) LTD.
 C-55, East of Kailash, New Delhi-110065
 ARCHITECTS T : 46596591 F : 46599512
 & PLANNERS E : info@perceptivideas.com | W : www.gpmindia.com

SECOND FLOOR LVL FRAMING PLAN

DRAWING TITLE	SECOND FLOOR LVL FRAMING PLAN					
DRAWING NO. :-	5	1	7	2	1	
SCALE	AS SHOWN	DATE	18.08.2022	SHEET NO. :-	5 OF 5	
DRAWN BY:	HSE	DESIGNED BY:	SJ	APPROVED BY:-	AGU	
STATUS :-	FOR SUBMISSION				REVISION NO. :-	00

STRUCTURAL CONSULTANT :-

PERCEPTIVE IDEAS CONSULTING ENGINEERS
 C-486, GROUND FLOOR,
 C.R. PARK, NEW DELHI - 110019
 P:011-40455638/39 E:info@perceptivideas.org
 PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD.



LEGEND:

- HATCH INDICATE COLUMN CONTINUOUS.
- HATCH INDICATE COLUMN/SHEAR WALL TERMINATE.
- HATCH INDICATE STUB COLUMN.

MARK	SIZE
(a)	450x600
(b)	300x600
(c)	750x600
(d)	900x600
(e)	300x900
(f)	300x600
(g)	230x600

* INCLUDING SLAB THICKNESS




M. K. M.

- GENERAL INSTRUCTION & NOTES:-**
- ALL DIMENSIONS SHOWN ARE IN MM. (UNLESS MENTIONED).
 - ALWAYS FOLLOW WRITTEN DIMENSIONS ONLY, DO NOT MEASURE ANY DIMENSION.
 - THIS DRAWING SHALL BE READ WITH GENERAL NOTES ISSUED IN DRAWING No.- **5517-13-101A**
 - FE 500-D** COMPLIANCE TO IS : 1786 (LATEST REVISION) SHALL BE USED FOR ALL REINFORCEMENT BARS.
 - FOR CONCRETE WORK USE CONCRETE GRADE OF **M25** COMPLIANCE TO IS : 456 (LATEST REVISION) (UNLESS MENTIONED).
 - INDICATES SLAB THICKNESS.
 - INDICATES SLAB PANEL NO. FOR R/F. DETAILS U/T INDICATES PARTIALLY OR FULLY UPTURN BEAM
 - FOR SLAB REINFORCEMENT DETAILS REFER DRAWING No.- **5517-21-607A**
 - FOR BEAM REINFORCEMENT DETAILS REFER DRAWING No.- **5517-21-707A**
 - STAIRCASE/RAMP DETAILS SHALL BE REFERRED FROM RELEVANT ARCHITECTURAL AND STRUCTURAL DRAWINGS.
 - ALL LEVEL MENTIONED IN FRAMING PLAN SHALL BE CROSS CHECKED WITH RELEVANT ARCHITECTURAL DRAWINGS.
 - CLEAR COVER TO CONCRETE SHALL BE AS FOLLOWS:
BEAMS-**25MM** (ALL SIDES) FROM FACE OF STIRRUPS
SLABS-**20MM** (TOP & BOTTOM)


- SPECIAL NOTES:-**
- MILD STEEL CIRCULAR SLEEVE SHALL BE PROVIDED (IF REQUIRED) IN BEAMS AT THE TIME OF CASTING ONLY. ADDITIONAL REINFORCEMENT SHALL BE PROVIDED NEAR SLAB & BEAM OPENING AS PER GIVEN DETAILS
 - BEAMS SHALL BE PLACED TO COLUMN FACE OR AS PER MASONRY WALL LAYOUT GIVEN IN ARCHITECTURAL DRAWING OR AS PER DIMENSIONS GIVEN IN FRAMING PLAN. ALL SECONDARY BEAMS SHALL BE PLACED EQUALLY IN BETWEEN PRIMARY BEAMS (UNLESS MENTIONED).
 - ALL SUNKEN AREAS AND SUNKEN DEPTH SHOWN ARE BASED ON INPUTS FROM ARCHITECTURAL DRAWINGS AND SERVICE CONSULTANTS. ALL SUNKEN AREAS SHALL BE FILLED WITH LIGHT WEIGHT MATERIAL OF DENSITY NOT MORE THAN 1000KG/M³.
 - DOVEL BARS FOR ELEVATION FEATURE/ FUTURE CONSTRUCTION SHALL BE PROVIDED WHILE CASTING WITH PROPER SHEAR KEY.
 - FOR THE PURPOSE OF LOADING, MASONRY UNIT CONSIDERED AS ACC BLOCK - **CUMULATIVE DENSITY OF 1000KG/M³**.
 - BASED ON ARCHITECTURAL DRAWINGS MASONRY LAYOUT HAS BEEN SHOWN ON FRAMING PLAN FOR REFERENCE ONLY. ANY DEVIATION SHALL BE BROUGHT IN NOTICE OF STRUCTURAL CONSULTANT
 - ALL MASONRY WALL ERECTION SHALL BE DONE AS PER DRAWING No.- **5517-14-101AB**
 - CONSTRUCTION MATERIAL SHALL NOT BE STACKED ON FLOOR SLAB BEYOND LIVE LOAD CAPACITY OF SLAB.
 - PRE CAMBER IN SHUTTERING SHALL BE PROVIDED AS MENTIONED IN FRAMING PLAN
 - ALL CONSTRUCTION JOINTS SHALL BE PLANNED BY SITE TEAM AND SHALL BE SEND TO STRUCTURAL CONSULTANT FOR APPROVAL PRIOR TO EXECUTION. NO CONSTRUCTION JOINTS SHALL BE PROVIDED FOR CANTILEVER PROJECTIONS
 - CONTRACTOR TO EVALUATE LOADING FROM UPPER FLOOR (DURING ITS CASTING) AND PROVIDE REQUIRED PROPOS LOWER SLAB LEVELS ACCORDINGLY.
 - FLOOR SLAB AND BEAM DESIGNED FOR FOLLOWING LOADING:-
 - A. LIVE LOAD CONSIDERED - **4KN/M²**
 - B. FLOOR FINISH THICKNESS - **75MM**

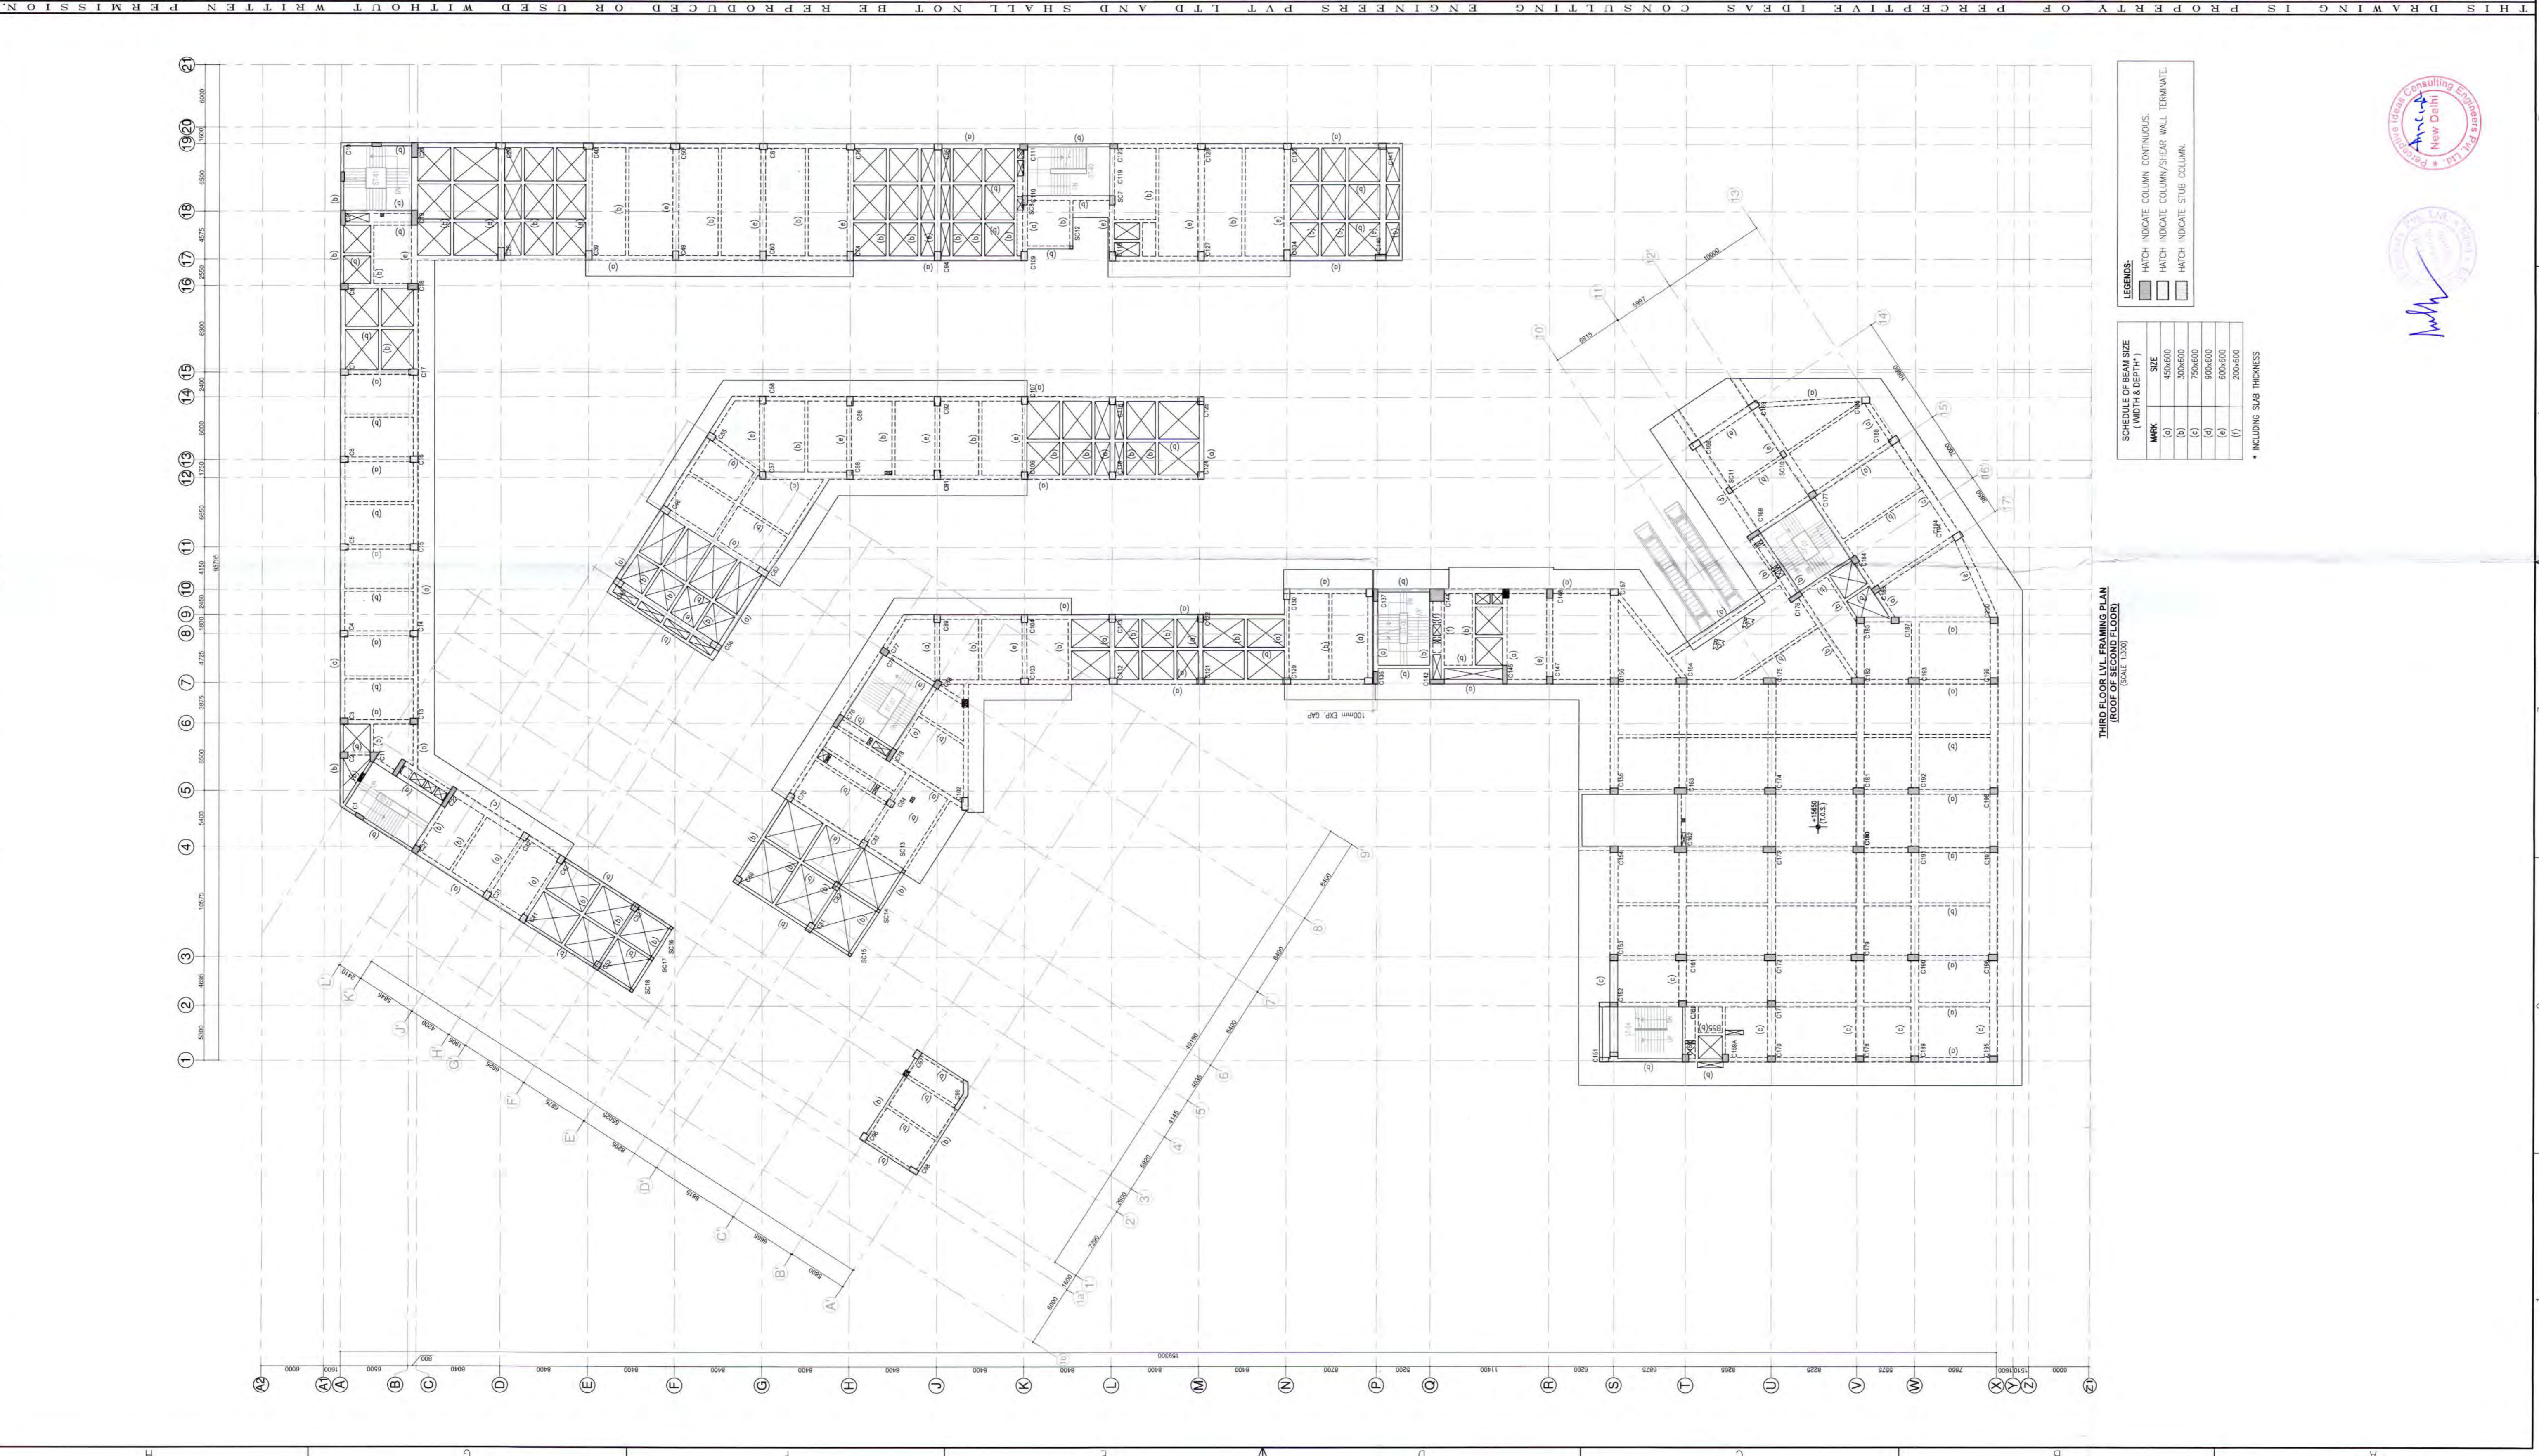
REV. NO.	DESCRIPTION	DATE

PROJECT :-
PROPOSED BUILDING PLAN OF COMMERCIAL COLONY AREA MEASURING 3.78125 ACRES (LICENSE NO. 93 DATED 12/11/2021) IN SECTOR-89, GURUGRAM BEING DEVELOPED BY COPIOUS REALTORS PVT. LTD.

ARCHITECT :-

 G.P. MATHER AND ASSOCIATES (P) LTD.
 ARCHITECTS
 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100
 T. 4658994 | F. 4658995
 P. 011-40455638/39 | E: info@perceptiveideas.org
 www.gpmaadla.com | www.perceptiveideas.com

DRAWING TITLE	THIRD FLOOR LVL FRAMING PLAN													
DRAWING NO. :-	5	5	1	7	2	1	5	0	6	A				
SCALE:	AS SHOWN	DATE:	18.08.2022	SHEET NO. :-	01	OF	02	DRAWN BY:	HSR	DESIGNED BY:	SJ	AGU	APPROVED BY :-	
STATUS :-	FOR SUBMISSION													
REVISION NO. :-	R0													

STRUCTURAL CONSULTANT :-

PERCEPTIVE IDEAS
 CONSULTING ENGINEERS
 C-486, GROUND FLOOR,
 C.R. PARK, NEW DELHI - 110019
 P-011-40455638/39 | E: info@perceptiveideas.org
 PERCEPTIVE IDEAS CONSULTING ENGINEERS PVT. LTD.



SCHEDULE OF BEAM SIZE (WIDTH & DEPTH)

MARK	SIZE
(a)	400x600
(b)	300x600
(c)	750x600
(d)	800x600
(e)	500x600
(f)	200x600

LEGEND:

- ▨ HATCH INDICATE COLUMN CONTINUOUS.
- ▨ HATCH INDICATE COLUMN/SHEAR WALL TERMINATE.
- ▨ HATCH INDICATE STUB COLUMN.

* INCLUDING SLAB THICKNESS

THIRD FLOOR LVL FRAMING PLAN (ROOF OF SECOND FLOOR)
(SCALE: 1:300)

