


KEY PLAN

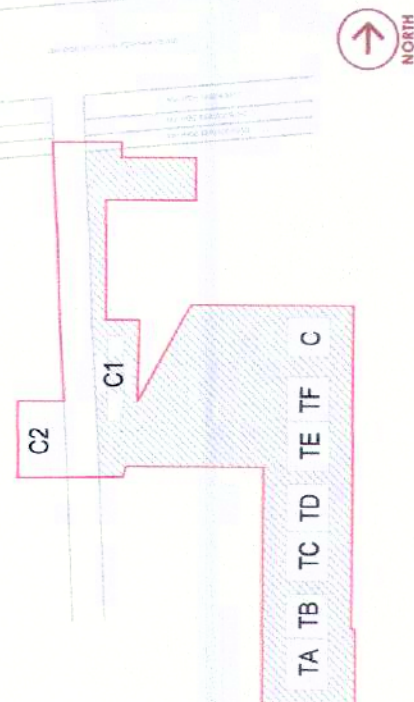

- NOTES:
1. All fixtures provided in toilets are as per N.B.C.
 2. Basement will be mechanically ventilated.
 3. All external walls shall be finished with tiles (basement etc.) will be critically lit.
 4. Sufficient capacity will be provided for the electrical load for the entire scheme. This therefore includes standby power for the entire scheme.
 5. Electrical load for the ventilation, smoke detector, heat detector, sprinkler, etc. shall be provided.
 6. All external walls are 100mm and all internal walls are 100mm thick. (Void for all walls).
 7. All Toilets will be Mechanically Ventilated.

MUMTY MACHINE ROOM LEVEL - AREA CHART					
ADDITIONS	WIDTH	LENGTH	NOS.	AREA	
	MTS	MTS			SQM
A	28.025	3.7	6		577.755
B	7.65	2.225	6		102.128
C	11.8	2.225	6		157.530
D	2.745	2.325	6		38.293
TOTAL BUILT UP AREA					875.705

Residential Tower Schedule					
DOORS & WINDOW SCHEDULE					
DOORS					
Tag	Width	Height	Lintel	Sill	Remarks
D1	1200	2400	2400	0	
D2	1050	2400	2400	0	
D3	950	2400	2400	0	
D4	1200	2400	2400	0	
D5	750	2400	2400	0	
FIRE DOORS					
FD1	1250	2400	2400	0	0 2H-REINFORCED
FD2	1250	2400	2400	0	0 2H-REINFORCED
FD3	1250	2400	2400	0	0 2H-REINFORCED
FD4	1200	2400	2400	0	0 2H-REINFORCED
FD5	1200	2400	2400	0	0 2H-REINFORCED
FD6	1500	2400	2400	0	0 2H-REINFORCED
FD7	1200	2400	2400	0	0 2H-REINFORCED
SHUTTER & ACCESS DOORS					
SD1	2000	2400	2400	100	0 1H-REINFORCED
SD2	2000	2400	2400	100	0 1H-REINFORCED
SD3	600	2300	2400	100	0 1H-REINFORCED
AD1	950	2300	2400	100	0 1H-REINFORCED
AD2	2000	2300	2400	100	0 1H-REINFORCED
AD3	2000	2300	2400	100	0 1H-REINFORCED
AD4	600	2300	2400	100	0 1H-REINFORCED
WINDOW					
W1	600	1200	2400	1200	
SLIDING DOOR					
SD1	4500	2400	2400	0	
SD2	4500	2400	2400	0	
SD3	1800	2400	2400	0	
SD4	1050	2400	2400	0	
GLAZING					
GL1	2400	2400	2400	2400	AS PLAN
GL2	2400	2400	2400	2400	AS PLAN
GL3	2400	2400	2400	2400	AS PLAN