
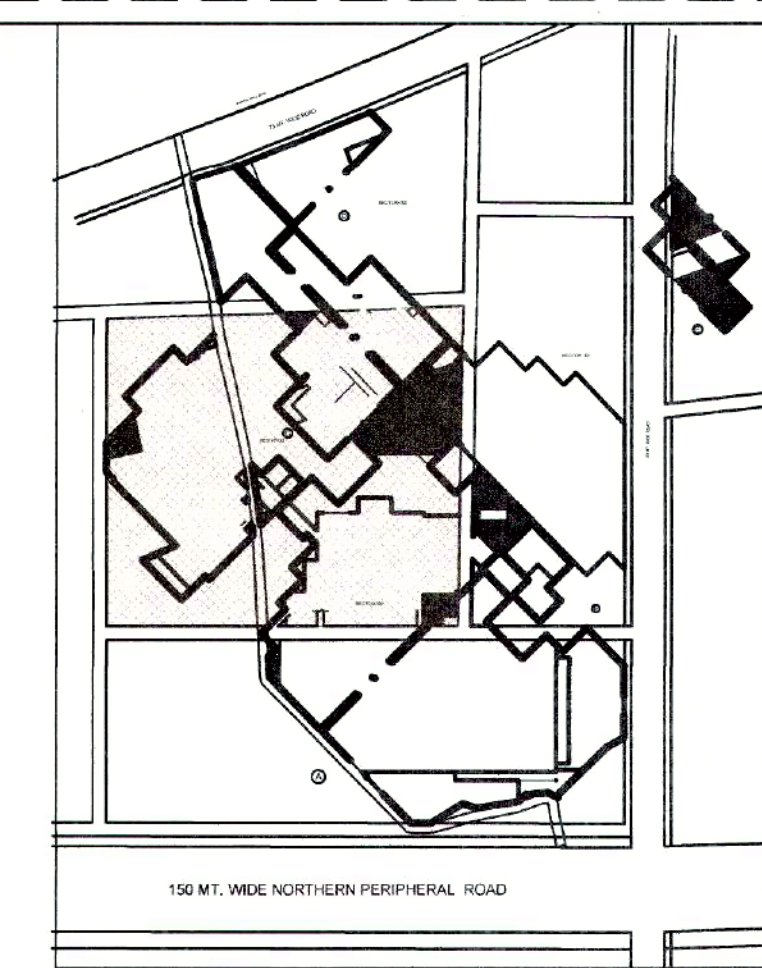


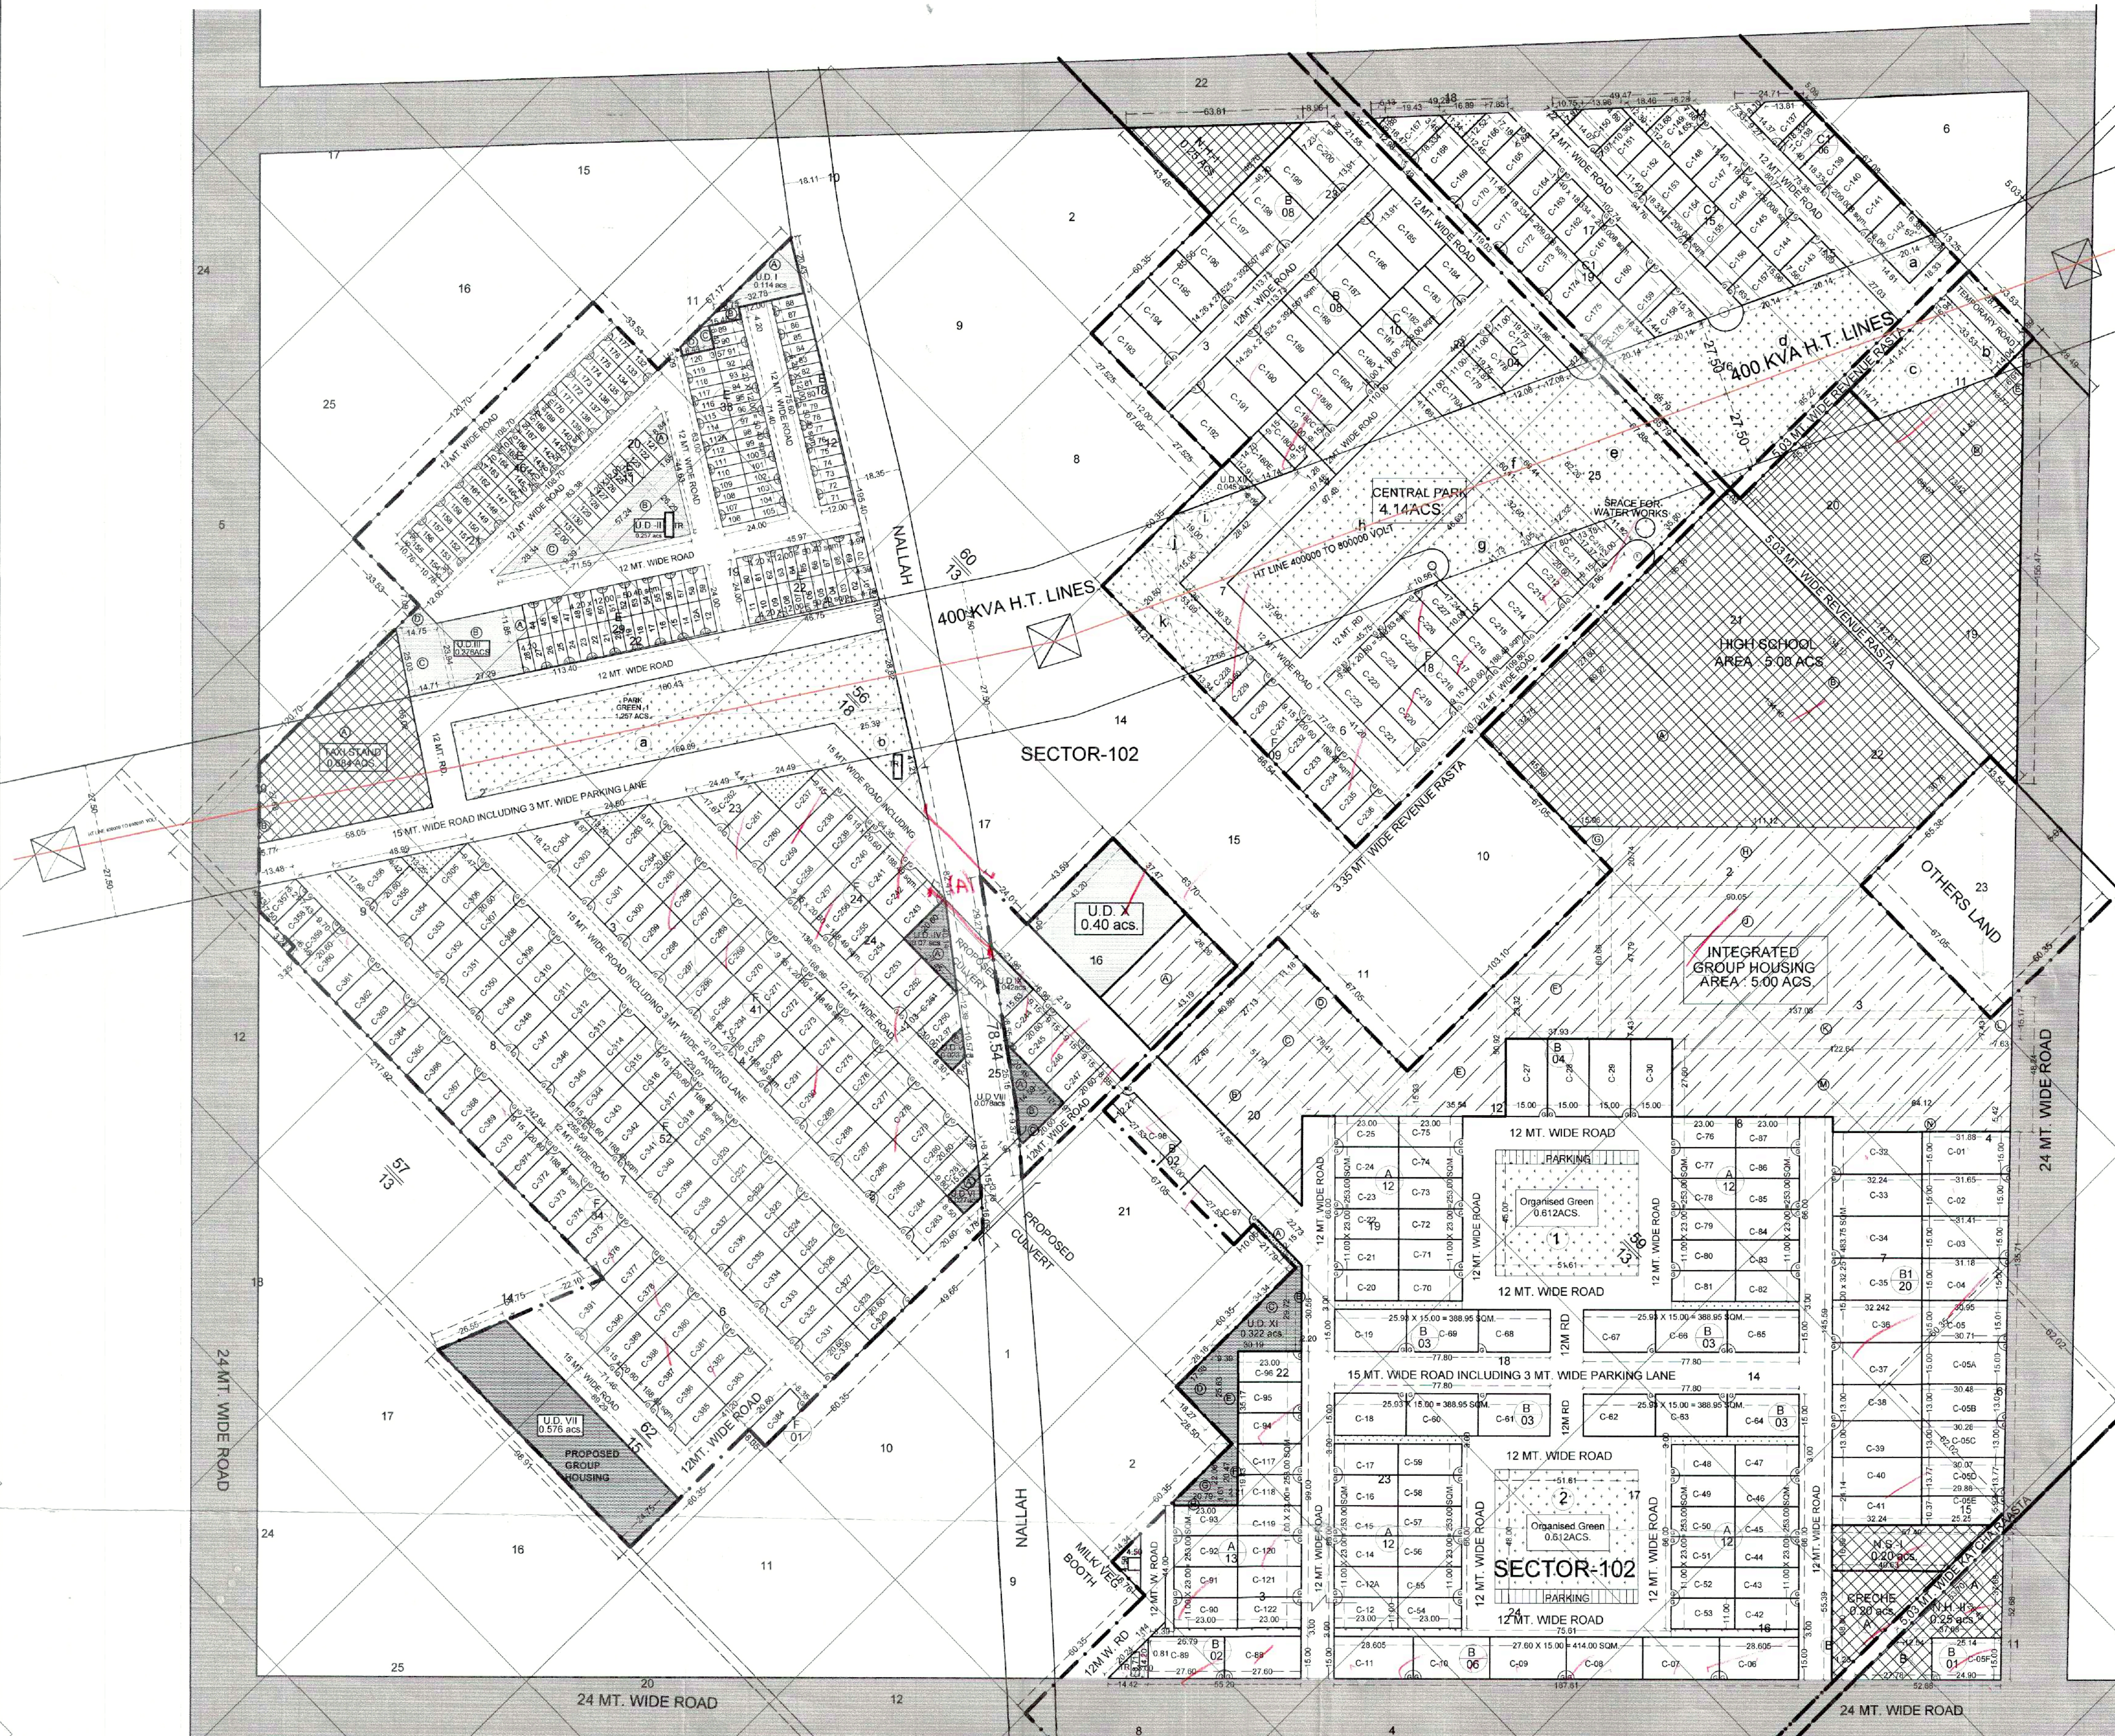

CALCULATION OF CENTRAL PARK = (a to k) 16760.129 sqm.(4.14 acs.)

a = (14.61 + 6.28)/2 X 18.33	= 191.457 sq.m.
b = 6.94 X 33.53	= 232.698 sq.m.
c = (33.53 + 14.71)/2 X 41.41	= 998.809 sq.m.
d = (65.79+27.03)/2 X 85.22	= 3955.060 sq.m.
e = (67.88 + 82.26)/2 X 38.65	= 2901.456 sq.m.
f = (60.41 + 60.41)/2 X 12.32	= 744.251 sq.m.
g = 42.58 X 32.60	= 1388.108 sq.m.
h = 37.90 X 97.48	= 3694.492 sq.m.
i = (6.09 +19.00)/2 X 28.42	= 356.530 sq.m.
j = 15.06 X 19.00	= 286.140 sq.m.
k = (44.21 + 53.69)/2 X 20.60	= 1008.370 sq.m.
TOTAL = 15757.371 sq.m.	

CALCULATION OF PARK GREEN-1 = (a to b) 5153.382 sqm.(1.273 acs.)

a = (160.89 + 160.43)/2 X 28.82	= 4630.221 sq.m.
b = (25.39 X 41.21)/2	= 523.161 sq.m.
TOTAL = 5153.382 sq.m.	

CALCULATION OF ORGANISED GREEN-1 & 2= 4799.730 sqm.(1.186 acs.)

1 = 45.00 X 51.61	= 2322.450 sq.m.
2 = 48.00 X 51.61	= 2477.280 sq.m.
TOTAL = 4799.730 sq.m.	

CALCULATION OF INTEGRATED GROUP HOUSING = (A TO N) 20419.212 sqm.(5.045 acs.)

A = 26.26 X 43.19	= 1134.169 sq.m.
B = (74.55 + 51.70)/2 X 22.49	= 1419.681 sq.m.
C = (51.70 + 78.41)/2 X 27.13	= 1764.942 sq.m.
D = (78.41 + 67.05)/2 X 11.18	= 813.121 sq.m.
E = (15.93 + 50.92)/2 X 35.54	= 1187.925 sq.m.
F = (23.32 + 60.66)/2 X 37.93	= 1592.681 sq.m.
G = 1/2 X 20.74 X 15.06	= 156.172 sq.m.
H = (111.12 + 90.05)/2 X 20.74	= 2086.133 sq.m.
J = (90.05 + 137.08)/2 X 47.79	= 5427.271 sq.m.
K = 137.08 X 7.43	= 1018.504 sq.m.
L = (7.43 + 15.17)/2 X 7.63	= 86.219 sq.m.
M = 122.64 X 27.60	= 3384.864 sq.m.
N = 64.12 X 5.42	= 347.530 sq.m.
TOTAL = 20419.212 sq.m.	

CALCULATION OF NURSING HOME -I = 1015.258 sqm. (0.25 acs.)

= 43.48 X 46.70/2	= 1015.258 sq.m.
-------------------	------------------

CALCULATION OF NURSING HOME -II = 1012.291 sqm. (0.25 acs.)

A = 1/2 X 37.68 X 37.68	= 709.891 sq.m.
B = (12.54 + 27.78)/2 X 15.00	= 302.400 sq.m.
TOTAL = 1012.291 sq.m.	

CALCULATION OF NURSERY SCHOOL-I = 813.905 sqm. (0.20 acs.)

= (57.49 + 40.63)/2 X 16.59	= 813.905 sq.m.
-----------------------------	-----------------

CALCULATION OF HIGH SCHOOL = 20464.842 sqm. (5.06 acs.)

A = (45.59 + 134.10)/2 X 89.92	= 8078.862 sq.m.
B = 134.10 X 30.78	= 4127.598 sq.m.
C = (88.07 + 142.61)/2 X 55.32	= 6380.609 sq.m.
D = (73.42 + 13.77)/2 X 41.45	= 1807.013 sq.m.
E = (13.77 + 7.00)/2 X 6.91	= 71.760 sq.m.
TOTAL = 20464.842 sq.m.	

CALCULATION OF CRECHE = 812.084 sqm. (0.20 acs.)

A = (1.23 + 40.63)/2 X 38.80	= 812.084 sq.m.
TOTAL = 812.084 sq.m.	

CALCULATION OF TAXI STAND = (A TO B) 2770.475 sqm. (0.685 acs.)

A = (65.02 + 27.68)/2 X 58.05	= 2690.618 sq.m.
B = (27.68 X 5.77)/2	= 79.857 sq.m.
TOTAL = 2770.475 sq.m.	

CALCULATION OF U.D.-I = (A+B+C+D) 463.217 sqm. (0.114 acs.)

A = 1/2 X 32.78 X 20.43	= 334.848 sq.m.
B = (15.48+8.75)/2 X 4.20	= 50.883 sq.m.
C = 8.40 X 3.57	= 29.998 sq.m.
D = (8.40+3.09)/2 X 8.44	= 48.489 sq.m.
TOTAL = 463.217 sq.m.	

CALCULATION OF U.D.-II = (A+B+C) 1041.74 sqm. (0.257 acs.)

A = (8.84+1.65)/2 X 12.00	= 62.940 sq.m.
B = 1/2 X 57.24 X 26.29	= 752.420 sq.m.
C = (28.34+9.39)/2 X 12.00	= 226.380 sq.m.
TOTAL = 1041.74 sq.m.	

CALCULATION OF U.D.-III = (A+B+C+D) 1115.556 sqm. (0.276 acs.)

A = 11.85 X 4.20	= 49.770 sq.m.
B = 27.29 X 23.94	= 653.323 sq.m.
C = (25.03+23.94)/2 X 14.71	= 360.174 sq.m.
D = 1/2 X 14.75 X 7.09	= 52.289 sq.m.
TOTAL = 1115.556 sq.m.	

CALCULATION OF U.D.-IV = (A) 282.735 sqm. (0.070 acs.)

A = 1/2 X 27.45 X 20.60	= 282.735 sq.m.
-------------------------	-----------------

CALCULATION OF U.D.-V = (A) 92.507 sqm. (0.023 acs.)

A = (13.61+6.61)/2 X 9.15	= 92.507 sq.m.
---------------------------	----------------

CALCULATION OF U.D.-VI = (A) 109.251 sqm. (0.027 acs.)

A = (16.10+7.78)/2 X 9.15	= 109.251 sq.m.
---------------------------	-----------------

CALCULATION OF U.D.-VII = (A) 2328.975 sqm. (0.576 acs.)

A = (98.91+89.29)/2 X 24.75	= 2328.975 sq.m.
-----------------------------	------------------

CALCULATION OF U.D.-VIII = (A+B+C+D) 316.379 sqm. (0.078 acs.)

A = 1/2 X 20.49 X 14.59	= 149.475 sq.m.
B = (20.60+14.59)/2 X 7.18	= 126.322 sq.m.
C = 20.60 X 1.97	= 40.582 sq.m.
TOTAL = 316.379 sq.m.	

CALCULATION OF U.D.-IX = (A) 171.617 sqm. (0.042 acs.)

A = 1/2 X 15.63 X 21.96	= 171.617 sq.m.
-------------------------	-----------------

CALCULATION OF U.D.-X = (A) 1618.704 sqm. (0.400 acs.)

A = 43.20 X 37.47	= 1618.704 sq.m.
-------------------	------------------

CALCULATION OF U.D.-XI = (A+B+C+D+E+F+G+H) 1305.062 sqm. (0.322 acs.)

A = (22.73+21.79)/2 X 2.15	= 47.859 sq.m.
B = (30.56+29.72)/2 X 2.20	= 66.308 sq.m.
C = 1/2 X 30.19 X 29.72	= 448.623 sq.m.
D = 1/2 X 17.98 X 18.27	= 164.247 sq.m.
E = (25.63+35.17)/2 X 9.39	= 285.456 sq.m.
F = (22.08+19.83)/2 X 2.21	= 46.311 sq.m.
G = 1/2 X 20.79 X 20.47	= 212.786 sq.m.
H = 20.79 X 1.61	= 33.472 sq.m.
TOTAL = 1305.062 sq.m.	

CALCULATION OF U.D.-XII = (A) 183.451 sqm. (0.045 acs.)

A = 1/2 X 12.91 X 28.42	= 183.451 sq.m.
-------------------------	-----------------

CLIENT: **COUNTRYWIDE PROMOTERS PVT. LTD.**
M-11 CONNAUGHT CIRCUS
NEW DELHI

For Countrywide Promoters Pvt. Ltd.
Authorized Signatory
Architect / Town Planner

REVISED DEMARCATION PLAN OF BLOCK-C, SECTOR - 102 & 102A IN GURGAON, HARYANA.