
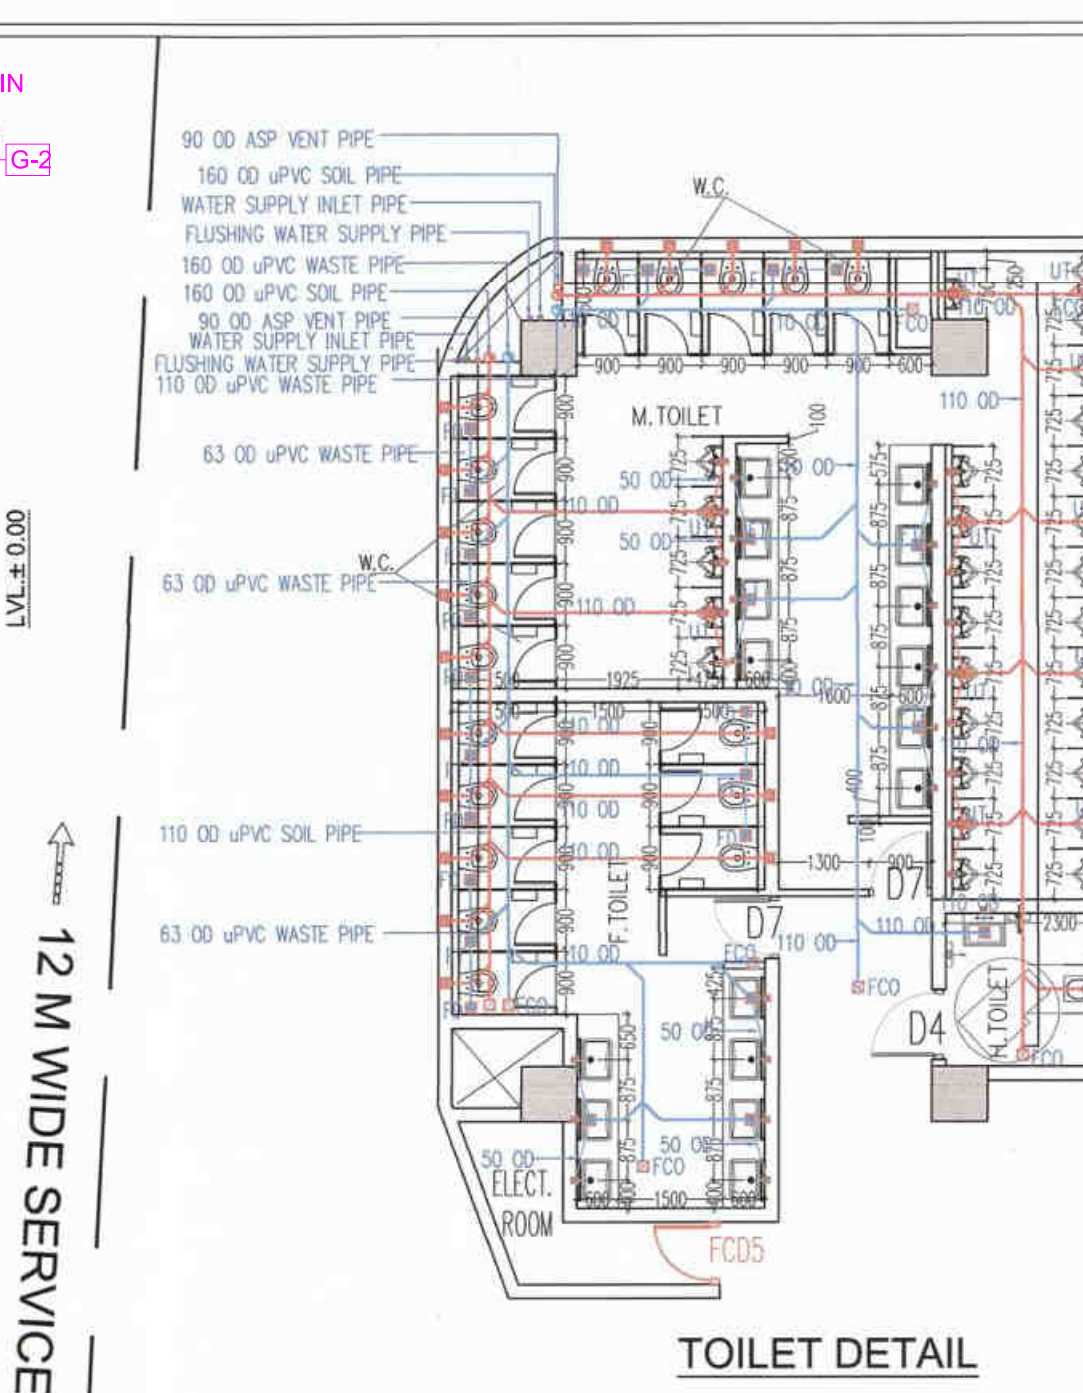


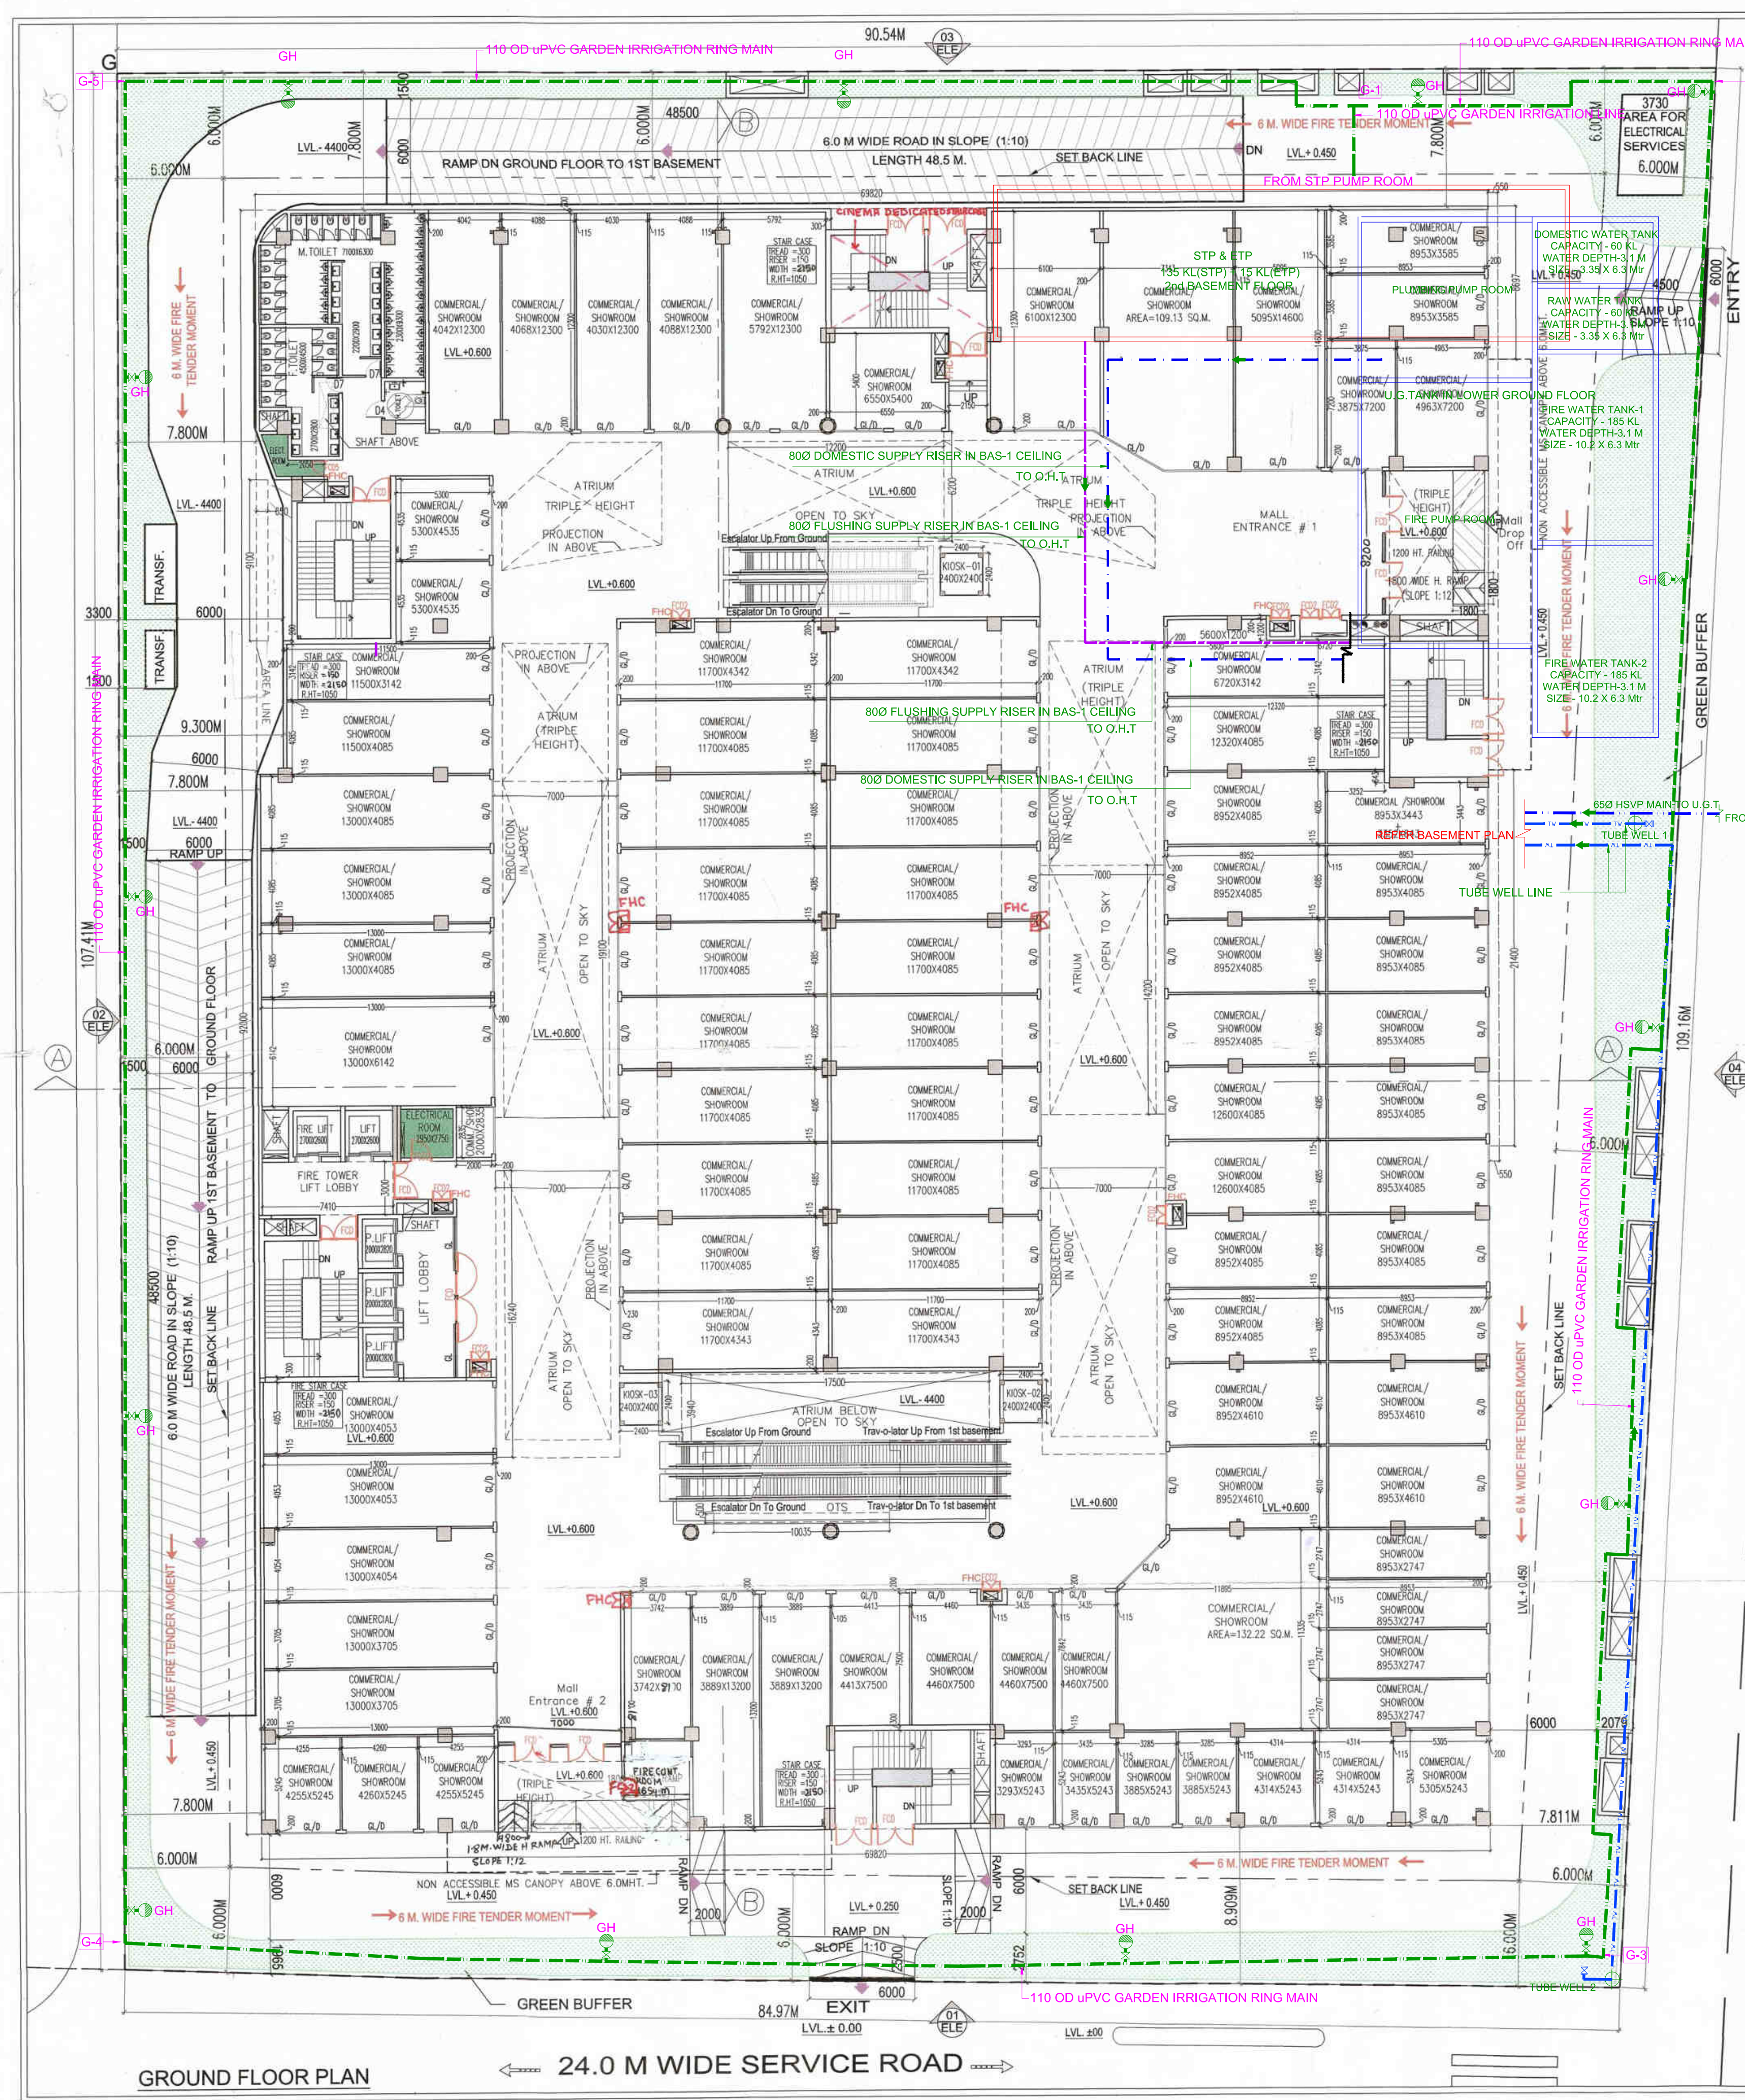

SCHEDULE OF OPENINGS				
TYPE	WIDTH	HEIGHT	SILL HT.	LINTEL
W1	4500	1950	750	2700
W2	7000	1950	750	2700
W3	1500	1800	900	2700
W4	900	1800	900	2700
V1	1000	600	2100	2700
GLAZING				
GL/D	2000	2700	-	2700
DW1	3295	2700	900	2700
D1	2000	2100	-	2100
D2	1800	2100	-	2400
D3	1500	2100	-	2100
D4	1200	2100	-	2100
D5	900	2100	-	2100
D6	750	2100	-	2100
D7	1050	2100	-	2100
FC0	2000	2100	-	2100
FC01	1500	2100	-	2100
FC02	1200	2100	-	2100
FC03	3000	3000	-	3000
FC04	2700	3000	-	2100
FC05	900	2100	-	2100

LEGEND FOR PLUMBING	
110 OD UPVC WASTE PIPE	160 OD UPVC SOIL PIPE
110 OD UPVC SOIL PIPE	FT FLOOR TRAP
90 OD ASP VENT PIPE	FD FLOOR DRAIN
160 OD UPVC WASTE PIPE	UT URINAL TRAP
63 OD UPVC WASTE PIPE	WATER SUPPLY INLET PIPE

PLUMBING NOTE:-
* WASH BASIN TO FLOOR TRAP 50 OD UPVC WASTE PIPE
* FLOOR DRAIN TO FLOOR TRAP 63 OD WASTE PIPE
* FLOOR TRAP TO VERTICAL WASTE STACK 110 OD WASTE PIPE
* W.C. TO VERTICAL STACK 110 OD SOIL PIPE

NOTES

THIS DEVELOPMENT HAS BEEN CONCEIVED, DESIGNED AND DRAFTED ON THE BASIS OF THE FOLLOWING

1. ALL USEABLE OFFICE SPACES/RETAIL SPACES (LIKE SHOP AREAS, ENTERTAINMENT) WILL BE AIR-CONDITIONED. THEREFORE NO PROVISION HAS BEEN MADE FOR NATURAL VENTILATION OF SPACES.
2. ALL TOILETS/KITCHENS WILL BE MECHANICALLY VENTILATED. CONDITIONED AIR FROM THE FLOOR WILL BE SUCKED IN TO THE TOILETS/KITCHENS AND VENTED OUT THROUGH A VENT SHAFT.
3. ALL SPACES (OFFICE SPACES, RETAIL SPACES, SERVICE AREAS, PARKING BASEMENT, ETC) WILL BE ARTIFICIALLY LIT. ANY NATURAL LIGHT WHICH IS AVAILABLE IN THE OFFICE SPACES IS ONLY INCIDENTAL AND NOT ESSENTIAL TO THE FUNCTIONING OF THE BUILDING.
4. 100% STANDBY GENERATING CAPACITY WILL BE PROVIDED FOR THE ENTIRE ELECTRICAL REQUIREMENT OF THE TOTAL SCHEME. THIS THEREFORE INCLUDES STANDBY GENERATION FOR ALL COMMON SERVICES, FIRE SERVICES, LIFTS ETC. AND ALSO THE ENTIRE ELECTRICAL LOAD FOR VENTILATION, AIR-CONDITIONING, LIGHTS AND ALL OFFICE EQUIPMENT.
5. BASEMENT WILL BE ARTIFICIALLY VENTILATED.
6. THIS BUILDING WILL BE SPRINKLED AS PER NBC NORMS.
7. HANDICAP RAMP WITH RAILING
8. THIS BUILDING IS MECHANICALLY VENTILATED & FULLY AIR-CONDITIONED.


LEGEND

Sanctioned
TO BE READ WITH THIS OFFICE
MEMO NO: ZP-463/SD (2022)/3450
DATED: 09-02-2022

Checked and found ok for Public Health
(Internal) Service only subject to comments in forwarding letter B.D. ACH (H.Q.) 24/06
DL 25/04/2022
Additional Civil Engineer (H.Q.)
HSVP, Panchkula

GIAN P. MATHUR
ARCHITECT
B.Arch, M.Arch
C.No. 68/69

OWNER'S SIGN
ARCHITECT'S SIGN

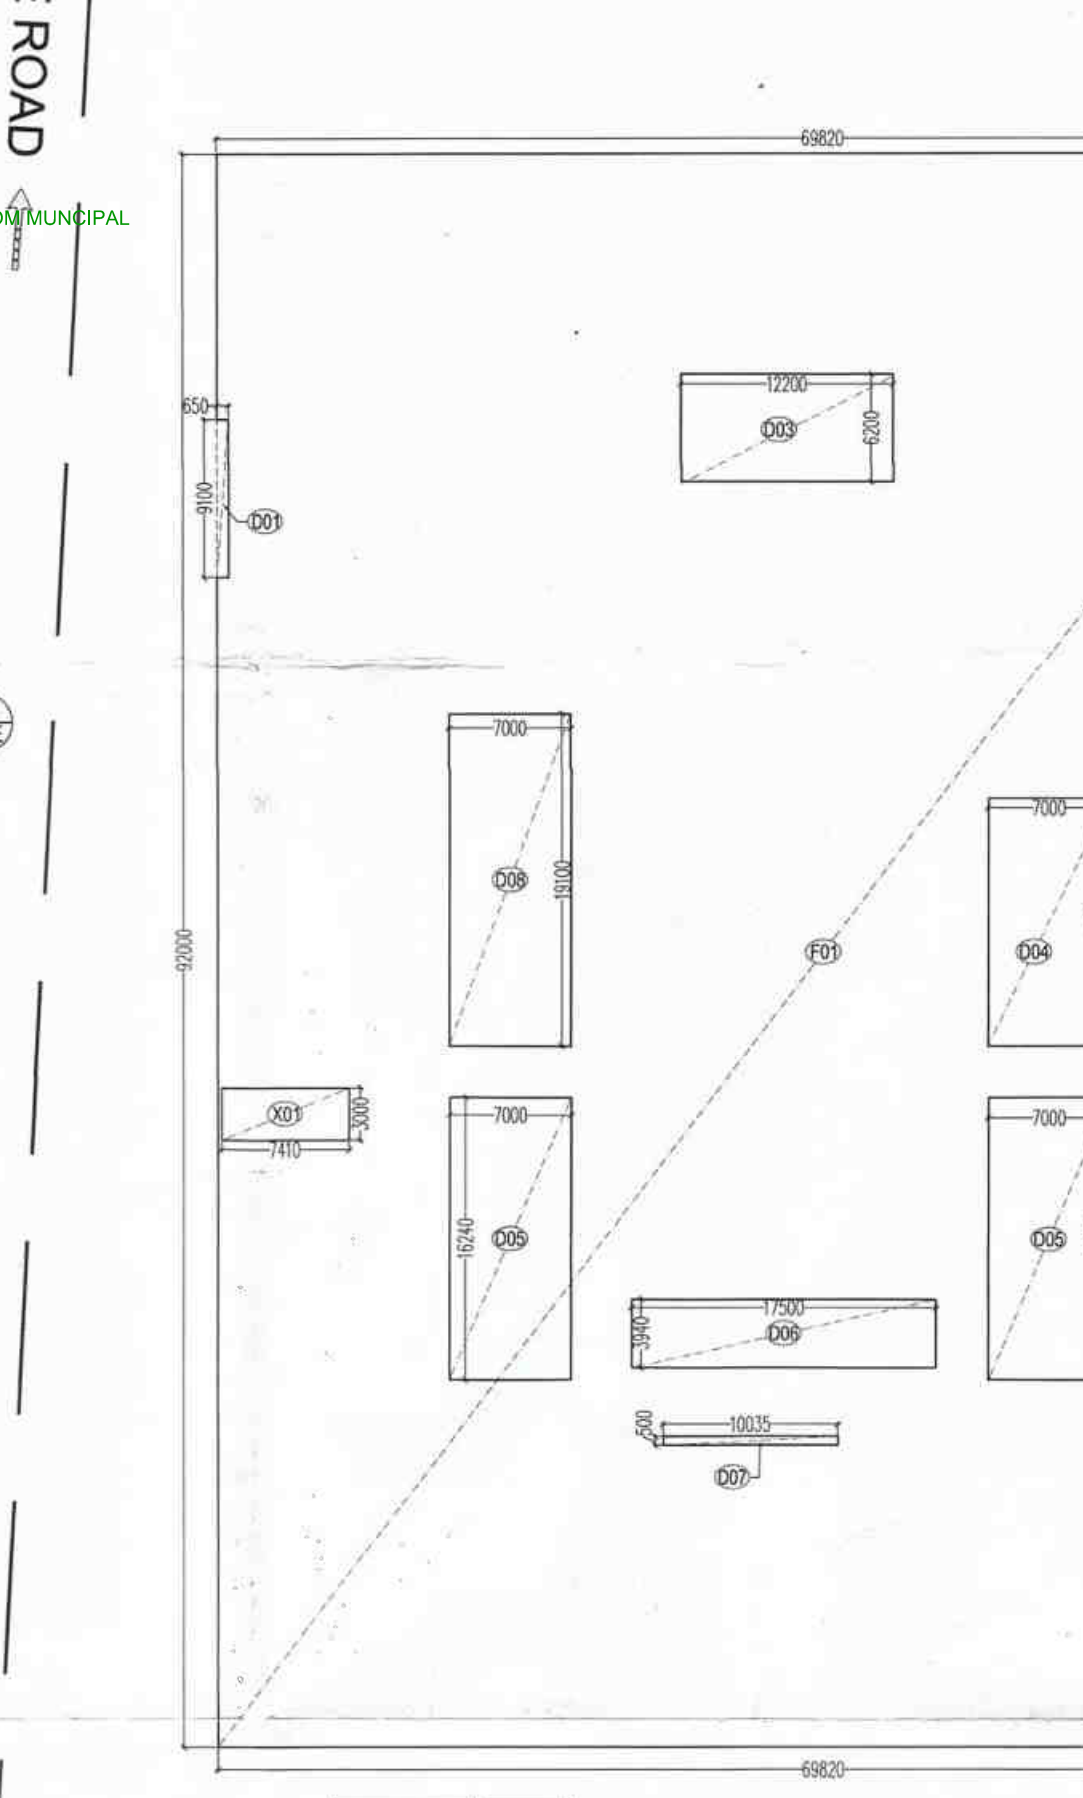

GROUND TOILET CALCULATION									
BALANCE FAR AREA AT GROUND FLOOR					TOTAL REQUIRED				
DENSITY AT GROUND FLOOR					TOTAL PROVIDED				