


**ZONING PLAN FOR AFFORDABLE RESIDENTIAL PLOTTED COLONY UNDER DEEN DAYAL JAN AWAS YOJNA-2016 OVER AN AREA MEASURING 20.03125 ACRES IN SECTOR-32, TEH. & DISTT. KURUKSHETRA (HARYANA), DEVELOPED BY M/S HOMESHETRA REALTORS PVT. LTD.**

**FOR PURPOSE OF CODE 1.2 (XCVI) & 6.1 (1) OF THE HARYANA BUILDING CODE, 2017, AS AMENDED FROM TIME TO TIME.**



**Note:-**  
Part of site comprising khasra nos. 11/3/2, 8, 12, 13, 18, 19, 22, & 23 shall be kept frozen till the stay on alienation is there in C.S. No. 850 of 2023 as per approved layout plan.

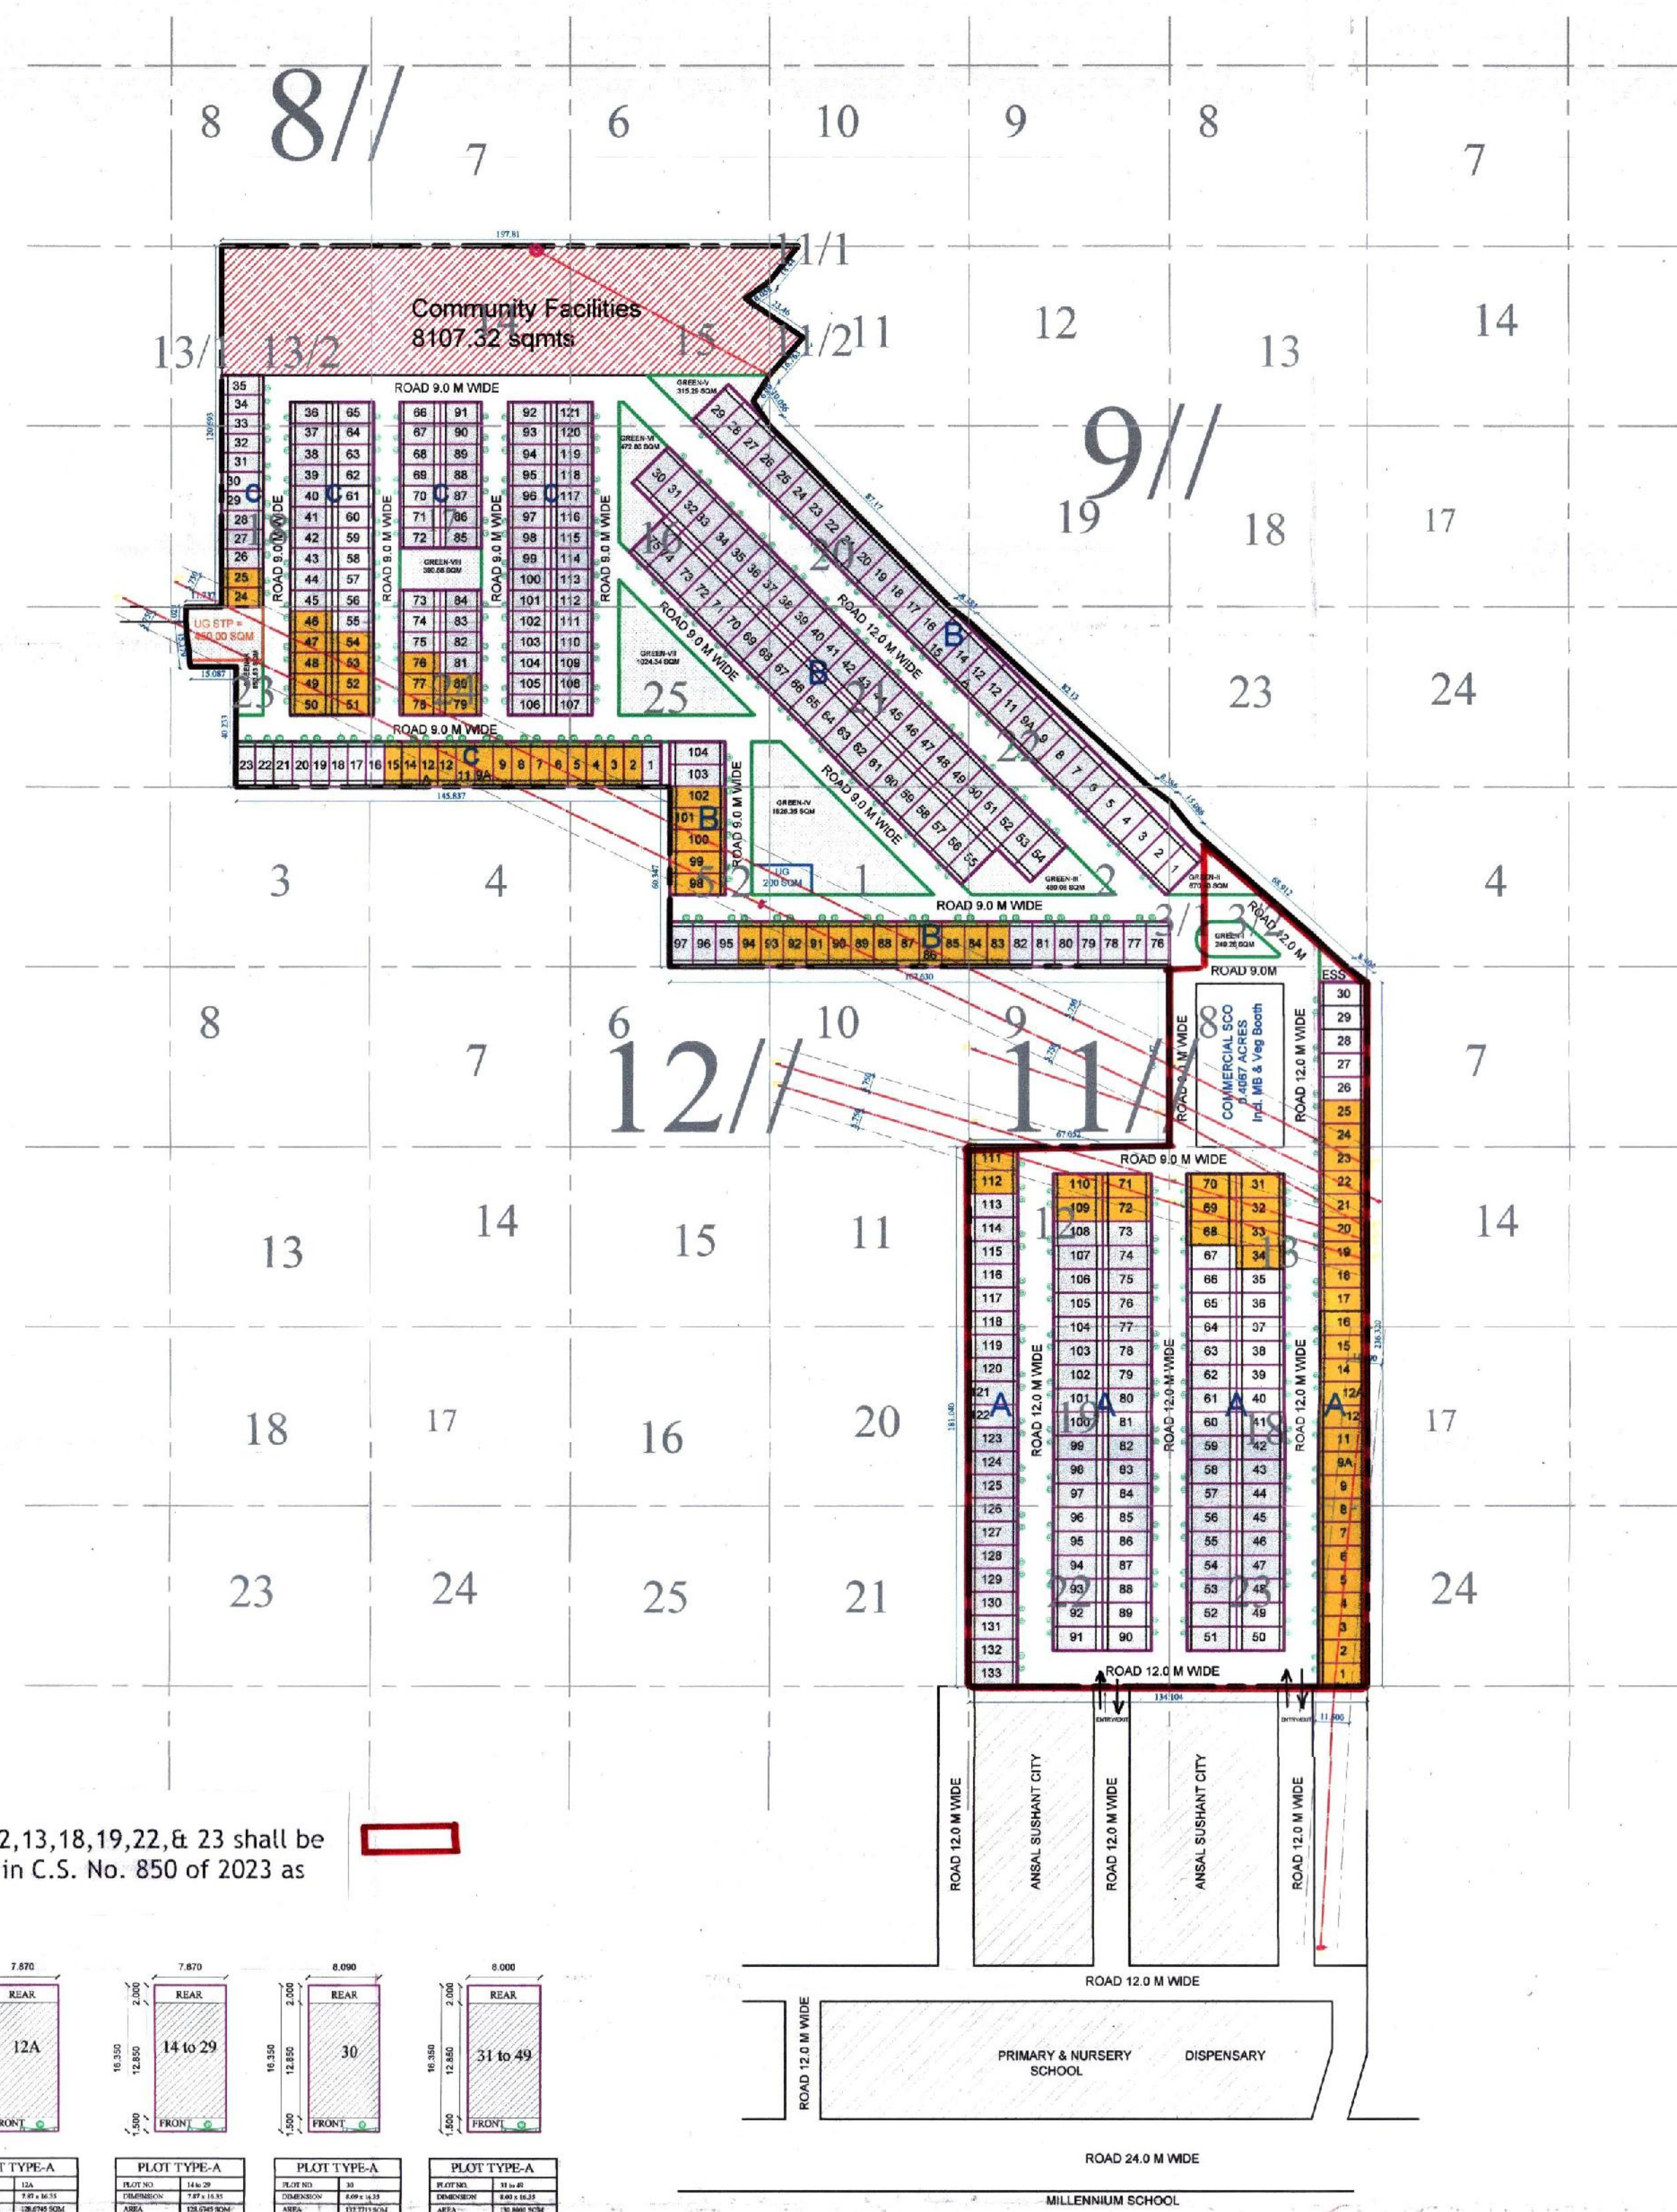

**LEGEND:-**

- PROPOSED AREA FOR LICENSE
- COMMERCIAL AREA
- COMMUNITY AREA

**NORTH**

- 1. USE ZONE**  
The land shown in this zoning plan shall be utilized in accordance with the marking explained in the table below and no other manner whatsoever:  

Notation	Permissible use of land on the portion of the plot marked in column 1	Type of building permissible on land marked in column 1.
1.	2.	3.
	Road	Road furniture at approved places.
	Public open space	To be used only for landscape features.
	Residential Buildable Zone	Residential building.
	Commercial	As per supplementary zoning plan to be approved separately for each site.
- 2. MAXIMUM PERMISSIBLE GROUND COVERAGE BASEMENT, FAR AND MAXIMUM PERMISSIBLE HEIGHT / INCLUDING STILT PARKING**  

Plot Area upto 150 square metres	Maximum Permissible Ground Coverage	Permissible Basement	Maximum Permissible Floor Area Ratio (FAR)	Maximum permissible Height.
Upto 150 square metres	75%	Single Level	200%	16.50M
- 3. PERMISSIBLE NUMBER OF DWELLING UNIT ON EACH PLOT**  

Plot Area	Maximum Permissible Ground Coverage	Permissible Basement	Maximum Permissible Floor Area Ratio (FAR)	Maximum permissible Height.
Upto 150 square metres	75%	Single Level	200%	16.50M
- 4. BAR ON SUB-DIVISION OF PLOT**  
Sub-division & clubbing of the plots shall not be permitted in any circumstances.
- 5. BUILDING SETBACK**  
Building other than boundary wall and gates shall be constructed only within the portion of the site marked as residential buildable zone in clause number 1 above. The cantilever projections as allowed in Haryana Building Code, 2017 shall project beyond the portion marked as residential buildable zone.
- 6. STILT PARKING**  
Stilt parking is allowed in all sizes plots. The clear height of the stilt shall be 2.40 meters from the plinth level and below the bottom of the beam. The Stilt will not be permissible for any purpose other than parking.
- 7. PARKING**  
  - (a) Parking shall be provided as per the provisions of Haryana Building Code - 2017, as amended from time to time.
  - (b) In no circumstance, the vehicle(s) belonging to the plot shall be parked outside the plot area.
- 8. PLINTH LEVEL**  
The plinth height of building shall be as per Code No. 7.3 of the Haryana Building Code, 2017.
- 9. BASEMENT**  
Single level basements within the building zone of the site shall be provided as per Code 6.3(3)(i)(a) and shall be constructed, used and maintained as per Code 7.16 of the Haryana Building Code, 2017.
- 10. RESTRICTION OF ACCESS FROM 45 MTS. WIDE OR MORE SECTOR ROADS AND PUBLIC OPEN SPACES**  
In the case of plots which abut on the 45 meters or more wide sector roads and plots which abut on public open spaces, no direct access whatsoever secondary or main shall be allowed into the plots from such roads and open spaces.
- 11. BOUNDARY WALL**  
  - (a) The boundary wall shall be constructed as per Code 7.5.
  - (b) The boundary walls in front courtyard which abut on a road or an open space shall be constructed according to standard design as approved by the DGTCP. The boundary wall in the rear courtyard shall not be more than 1.80 meters in height.
  - (c) In case of corner plots, boundary walls shall be rounded off at such corner by a radius as given below:-  
    - i). 0.5 meters Radius for plots opening on to open space.
    - ii). 1.0 meters Radius for plots.
  - (d) The owner/applicant if desires, is permitted to not construct boundary wall in front of plot, so that the said area can be utilized for parking.
- 12. GATE AND GATE POST**  
  - a) Gate and gate post shall be constructed as per approved standard design, at the position indicated on the zoning plan.
  - b) An additional wicket gate of standard design not exceeding 1.15 meter width may be allowed in the front and side boundary wall provided further that no gate shall be allowed in the rear boundary wall or towards the sector road and public open space.
- 13. DISPLAY OF POSTAL NUMBER OF THE PLOT**  
The premises number and postal address shall be written at the space shown for this purpose on the standard design of the gate as per approved design.
- 14. GARBAGE COLLECTION POINT**  
Every plot holder shall make adequate provision for garbage collection in his own plot and make suitable arrangement for disposal at the towable collection point to be provided by the colonizer.
- 15. ACCESS**  
No plot or public building will derive an access from less than 9.00 meters wide road.
- 16. GENERAL**  
  - (i) That the coloniser/owner shall use only Light-Emitting Diode lamps (LED) fitting for internal lighting as well as Campus lighting.
  - (iv) That the coloniser/owner shall strictly comply with the directions issued vide Notification No. 19/6/2016-5P dated 31.03.2016 issued by Haryana Government Renewable Energy Department, if applicable.
  - (v) That the coloniser/owner shall ensure the installation of Solar Photovoltaic Power Plant as per the provisions of order No. 22/52/2005-5Power dated 21.03.2016 issued by Haryana Government Renewable Energy Department, if applicable.
  - (vi) Rain Water Harvesting shall be provided as per HBC-2017, if applicable.
  - (vii) fire safety protection measures shall be regulated by Haryana Fire service Act, 2009, as amended from time to time.

Note:  
Read this drawing in conjunction with the demarcation plan verified by D.T.P Kurukshetra vide Endst no.3260 dated 13.10.2023.  
DRG. NO. DGTCP 9701 DATED 17.10.2023

(SATYAPAL) JD (HQ) (RAHUL SINGLA) ATP (HQ) (ASHISH SHARMA) DTP (HQ) (SUNJPA SETHI) STP (HQ) (R.P. SINGH) CTP (HR) (T.L.SATYAPRAKASH, IAS) DG, TCP (HR)