


ELEVATION -1

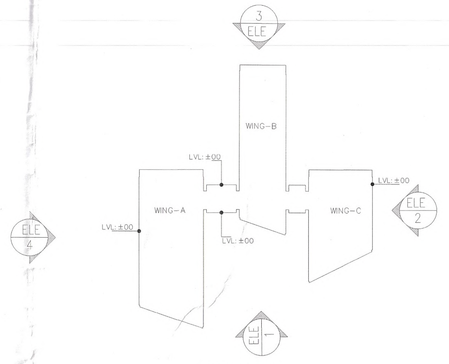

This is a "PROVISIONAL BUILDING PLAN" approved only for the purpose of inviting Objections from the general public

S.T.P.(HQ) Member Secretary B.P.A.C.

S.T.P.(G) Member B.P.A.C.

C.T.P.(HR.) Chairman B.P.A.C.

DTP(HQ)

ATP(HQ)

TO BE READ WITH THIS OFFICE MEMO NO.: DATED:

JD(HQ) Member BPAC

NOTES: –

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. ALL BUILDING EXCLUDING BASEMENTS FULLY AIR CONDITIONED AS PER N.B.C. NORMS.
3. ALL BASEMENTS ARE MECHANICALLY LIGHTED AND VENTILATED AS PER N.B.C. NORMS.
4. ALL BUILDING INCLUDING BASEMENT FULLY SPRINKLERED AS PER N.B.C. NORMS.
5. ALL PARTITION WALLS IN TOILET ARE 2400 HIGH.
6. ALL TOILETS ARE MECHANICALLY VENTILATED AND LIGHTED.
7. GF CLEAR HT IS 4500mm

Door Window Schedule

S. No.	Tag	Size		Cill	Lintel	Remarks
		Width	Height			
1	D1	700	2400		2400	DOOR
2	D2	900	2400		2400	DOOR
3	D3	1000	2400		2400	TOILET MAIN DOOR
4	D4	1200	2400		2400	FAN ROOM DOOR
5	D5	1500	2400		2400	SERVICE LOBBY DOOR
6	D6	2000	2400		2400	ENTRANCE GLASS DOOR
7	D7	1000	2400		2400	
8	D8	600	2400		2400	JANITOR'S DOOR
9	D9	2400	2400		2400	ISOLATOR ROOM DOOR
10	D10	1200	2400		2400	METER ROOM DOOR
11	D11	3000	2400		2400	ISOLATOR ROOM DOOR
12	D12	1150	2400		2400	DOOR
13	D13	1500	2400		2400	DOOR
14	D14	1150	2400		2400	DOOR
15	D15	750	2400		2400	GUARD ROOM DOOR
16	D16	2525	2400		2400	DOOR
17	RS1	3000	3000		3000	TRF ROOM ROLLING SHUTTER
18	FD1	1000	2400		2400	FIRE DOOR
19	FD3	1500	2400		2400	FIRE DOOR
20	FD7*	1500	2400		2400	FIRE DOOR
21	FD3**	1500	2400		2400	FIRE DOOR
22	FD4	1500	2400		2400	FIRE DOOR
23	FD5	2000	2400		2400	FIRE DOOR
24	FD6	3000	2400		2400	FIRE DOOR
25	FD7	2350	2400		2400	FIRE DOOR
26	FD8	1200	2400		2400	FIRE DOOR
27	FD9*	1000	2400		2400	FIRE DOOR
28	FD10	2350	2400		2400	FIRE DOOR
29	FD11	1100	2400		2400	FIRE DOOR
30	FC1	3400	4450			FIRE CURTAIN
31	FC2	9700	9590			FIRE CURTAIN
32	FC3	4500	9100			FIRE RATED GLASS DOOR /GLAZING
33	FC4	9850	9590			FIRE CURTAIN
34	FGL1	2485	2400		2400	GLASS FIRE DOORS
35	FGL2	2800	2400		2400	GLASS FIRE DOORS
36	OP1	1050	2100	900	2100	FAÇADE WINDOW
37	W1	1220	1100	1200	2300	WINDOW
38	W2	900	2600	900	3500	WINDOW
40	FW1	1200	2150	250	2400	OFFICE LIFT LOBBY
41	FW2	2000	2150	250	2400	OFFICE LIFT LOBBY
42	FW3	2950	2150	250	2400	OFFICE LIFT LOBBY
43	FW4	3600	2150	250	2400	OFFICE LIFT LOBBY
44	SD1	1500	2300	100	2400	TENENT SHAT DOOR
45	SD2	900	2300	100	2400	FHC
46	SD5	1500	2300	100	2400	FIRE MAN PIPE SHAFT
47	SD7	1000	2400	100	2300	SHAFT DOOR
48	GL1	39934	69430			GLAZING
49	GL2	75395	62625			GLAZING
50	GL3	88340	69430			GLAZING
51	GL4	1900	9900		9900	GLAZING
52	GL4a	3735	9900		9900	GLAZING
53	GL5	1800	9900		9900	GLAZING
54	GL6	17468	9900		9900	GLAZING
55	GL7	10040	9900		9900	GLAZING
56	GL8	28718	42625			GLAZING
57	GL9	87150	42625			GLAZING
58	GL10	96435	35800			GLAZING
59	GL11	66520	52670			GLAZING
60	GL12	42195	52670			GLAZING
61	GL13	42205	45870			GLAZING
Note:	ALL FIRE DOORS ARE TO BE 2 HRS. FIRE RATED.					

OWNER'S SIGNATURE

ARCHITECT'S SIGNATURE
CA/92/14687

KAMAL RATRA
CA/92/14687

OWNER:-

Advance India Projects Pvt. Ltd. Authorised Signatory

PROJECT:-

Revised Building Plans of IT Park/Cyber Park colony over an area measuring 6.1375acres falling in the revenue estate of village Maidawas, sector -66 Gurugram, being developed by Advance India Projects limited under License No 112 of 2012 dated 27.10.2012

DRG. TITLE:-
ELEVATION 1

DRG. NO. :
S-24

SCALE
1:200

DATE
08.03.25