




SITE PLAN

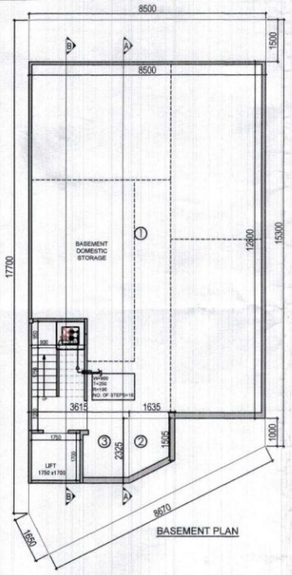


BASEMENT PLAN

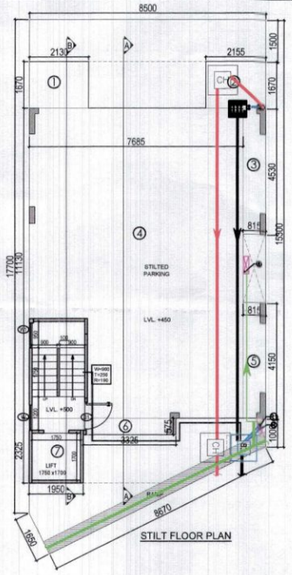


STILT FLOOR PLAN

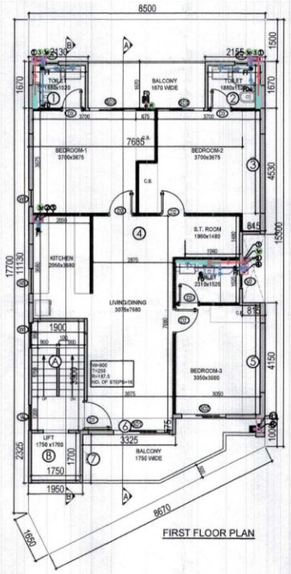


FIRST FLOOR PLAN

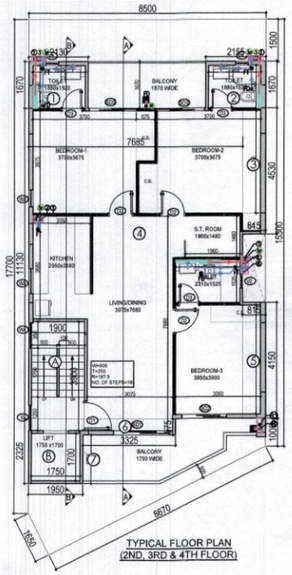


TYPICAL FLOOR PLAN (2ND, 3RD & 4TH FLOOR)

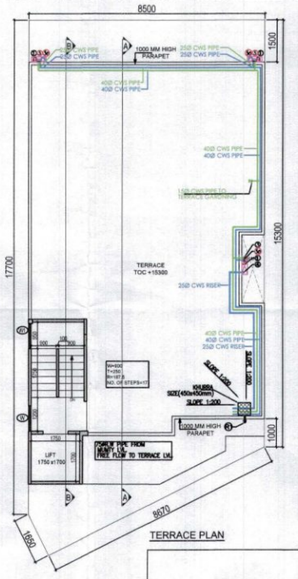


TERRACE PLAN

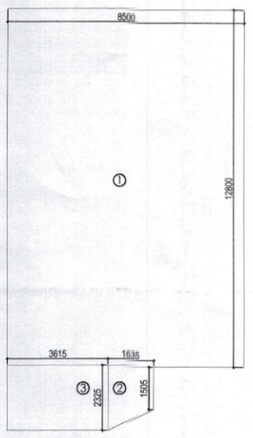


BASEMENT AREA DIAGRAM

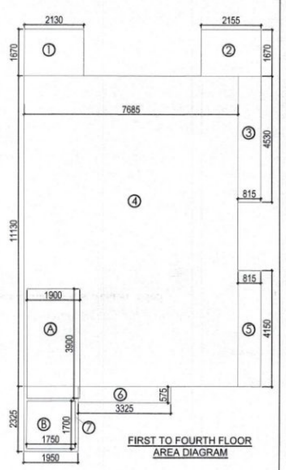


FIRST TO FOURTH FLOOR AREA DIAGRAM

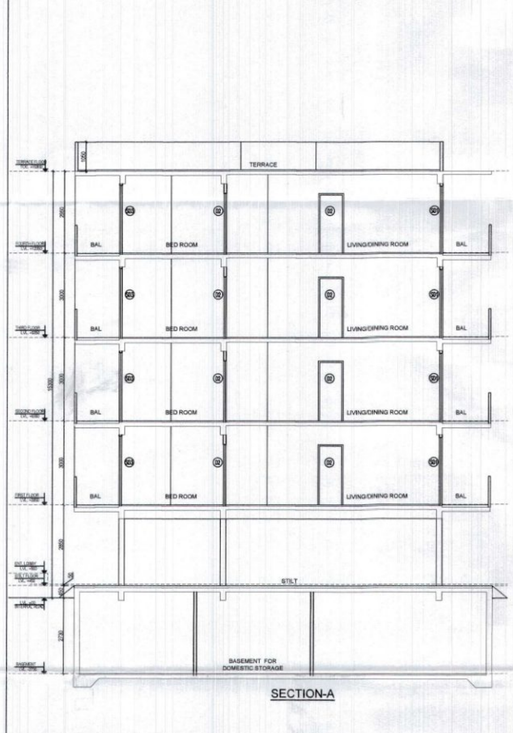


SECTION-A

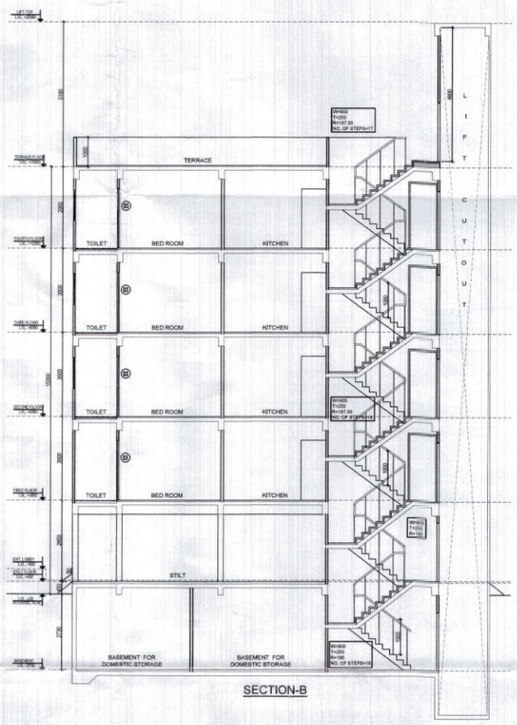


SECTION-B

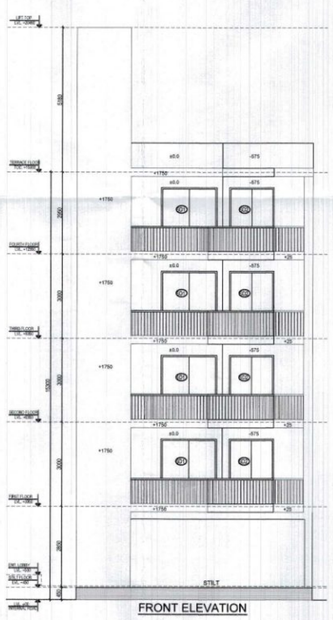

FRONT ELEVATION

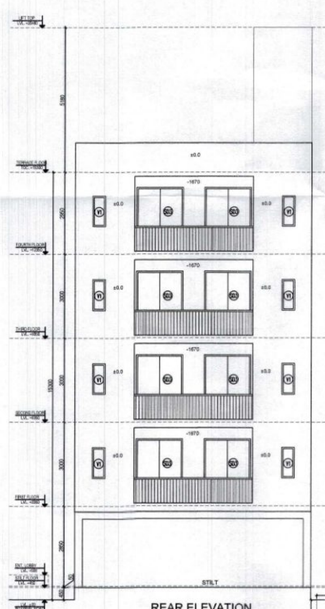

REAR ELEVATION

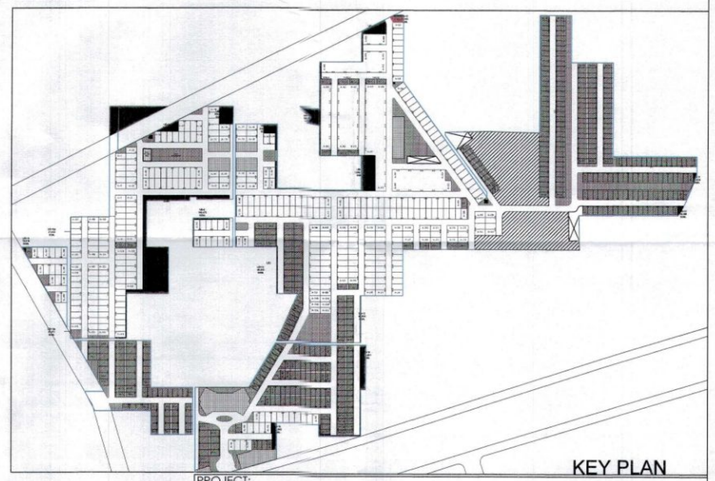

KEY PLAN

Memo no. 2100/09
Dtd. 04-July-2024

AREA CALCULATION								
							AREA	UNIT
TOTAL PLOT AREA						=	147.288	SQ.M.
PERMISSIBLE FAR @ 2.640						=	388.840	SQ.M.
PROPOSED FAR @ 2.634						=	388.017	SQ.M.
PERMISSIBLE GR. COV. @ 75.0%						=	110.466	SQ.M.
PROPOSED GROUND COVERAGE @ 72.11%						=	106.210	SQ.M.

AREA OF STILT FLOOR (GR COVERAGE)								
1	2.130	X	1.670	X	1	=	3.557	SQ.M.
2	2.155	X	1.670	X	1	=	3.599	SQ.M.
3	0.815	X	4.530	X	1	=	3.692	SQ.M.
4	7.685	X	11.130	X	1	=	85.534	SQ.M.
5	0.815	X	4.150	X	1	=	3.382	SQ.M.
6	3.325	X	0.575	X	1	=	1.912	SQ.M.
7	1.950	X	2.325	X	1	=	4.534	SQ.M.
TOTAL GROUND COVERAGE						=	106.210	SQ.M.

FAR AREA OF STILT FLOOR								
1	1.950	X	1.750	X	1	=	3.413	SQ.M.
2	2.100	X	4.150	X	1	=	8.715	SQ.M.
					TOTAL	=	12.128	SQ.M.
A	1.900	X	3.900	X	1	=	7.410	SQ.M.
					TOTAL	=	7.410	SQ.M.
TOTAL FAR AREA OF STILT FLOOR						=	4.718	SQ.M.

AREA OF TYPICAL FLOOR (1ST TO 4TH)								
1	2.130	X	1.670	X	1	=	3.557	SQ.M.
2	2.155	X	1.670	X	1	=	3.599	SQ.M.
3	0.815	X	4.530	X	1	=	3.692	SQ.M.
4	7.685	X	11.130	X	1	=	85.534	SQ.M.
5	0.815	X	4.150	X	1	=	3.382	SQ.M.
6	3.325	X	0.575	X	1	=	1.912	SQ.M.
7	1.950	X	2.325	X	1	=	4.534	SQ.M.
					TOTAL	=	106.210	SQ.M.
DEDUCTION								
A	1.900	X	3.900	X	1	=	7.410	SQ.M.
B	1.750	X	1.700	X	1	=	2.975	SQ.M.
					TOTAL	=	10.385	SQ.M.
TOTAL AREA OF TYPICAL FLOOR						=	95.825	SQ.M.
TOTAL FLOOR AREA = (AREA OF TYPICAL FLOOR X 4) + STILT FLOOR AREA						=	388.017	SQ.M.
TOTAL GROUND COVERAGE = STILT FLOOR AREA						=	106.210	SQ.M.

BASEMENT AREA								
1	8.600	X	12.600	X	1	=	108.800	SQ.M.
2	(2.325+1.505)	X	1.635	X	0.6	=	3.131	SQ.M.
3	3.615	X	2.325	X	1	=	8.405	SQ.M.
TOTAL BASEMENT AREA						=	120.336	SQ.M.

MACHINE ROOM AREA								
1	1.950	X	1.900	X	1	=	3.705	SQ.M.
TOTAL MACHINE ROOM AREA						=	3.705	SQ.M.


TOTAL BUILT UP AREA			
(BASEMENT AREA + G. COVERAGE AT STILT FLOOR + FLOOR AREA (1ST TO 4TH) + STAIRCASE AREA X 4 + MACHINE ROOM AREA	=	643.190	SQ.M.

DOOR WINDOW SCHEDULE					
TYPE	WIDTH	HEIGHT	SILL LVL.	LINTEL LVL.	REMARKS
D1	1000	2350	± 00	2350	ENTRANCE
D2	900	2350	± 00	2350	BEDROOMS
D3	750	2350	± 00	2350	TOILETS
SD1	2000	2350	± 00	2350	LIVING
SD2	1600	2350	± 00	2350	BED ROOM
SD3	1670	2350	± 00	2350	BED ROOMS
W1	900	1350	1050	2350	KITCHEN
W2	900	1450	900	2350	STAIRCASE
W3	600	1450	900	2350	BED ROOM
V1	450	1300	1050	2350	TOILETS
V2	500	1300	1050	2350	TOILET

PLUMBING LEGENDS	
(1)	110 OD WASTE PIPE PVC SWR TYPE-B (SOLVENT JOINT)
(2)	110 OD WASTE PIPE PVC SWR TYPE-B (SOLVENT JOINT)
(3)	COLD WATER SUPPLY DN TAKE FOR 1ST & 2ND FLR. (PVC SCH.40)
(3A)	COLD WATER SUPPLY DN TAKE FOR 3RD & 4TH FLR. (PVC SCH.40)
(4)	25ø WATER SUPPLY RISER PIPE (PVC SCH.40)
(R)	75 OD RWP FOR (TERRACE/BALCONY) PVC SWR TYPE-A ,TYPE-B UNDER GROUND
COP	CLEAN OUT PLUG


150 MM AAC WALL

100 MM AAC WALL



MACHINE ROOM AREA DIAGRAM

STILT AREA DIAGRAM

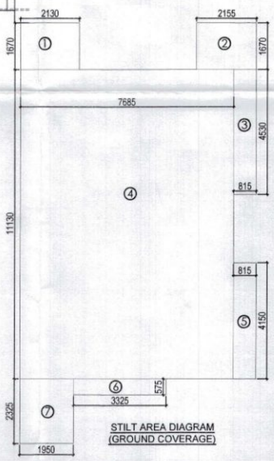

STILT AREA DIAGRAM (GROUND COVERAGE)

PROJECT:
REVISED BUILDING PLAN ON PLOT NO.- P-10 (1 PLOT) FOR AFFORDABLE RESIDENTIAL PLOTTED COLONY (UNDER DEEN-DAYAL JAN AWAS YOJNA) OVER AN AREA 57.40 ACRES (LICENCE NO.32 OF 2021 DATED 03.07.2021 FOR AN AREA MEASURING 52.275 ACRES & LICENCE NO. 102 OF 2022 DATED 27.02.2022 FOR AN AREA MEASURING 5.125 ACRES) IN THE REVENUE ESTATE OF VILLAGE-HAYATPUR, SECTOR 89, GURUGRAM BEING DEVELOPD BY AAWAM RESIDENCY PRIVATE LIMITED & OTHERS IN COLLABORATION WITH ADHIKAANSH REALTORS PRIVATE LIMITED.

ARCHITECT:
GIAN P. MATHUR AND ASSOCIATES (P) LTD.
C - 55, East Of Kailash, New Delhi-110065
T : 46599599 I F 46599512
E : info@gpmindia.com I W : www.gpmindia.com

DRAWING TITLE :
TYPE P10 - FLOOR PLANS WITH AREA CALCULATION, ELEVATIONS & SECTIONS


D.N. - SW-VL-17

SCALE:- 1:100


DRAWN BY:- ALI

CHECK BY:- NAMITA


ARCHITECT'S SIGN	AUTHORIZED SIGN
GIAN P. MATHUR ARCHITECT B. Arch., M.C.A. I.I.A CA No. 80/5769	

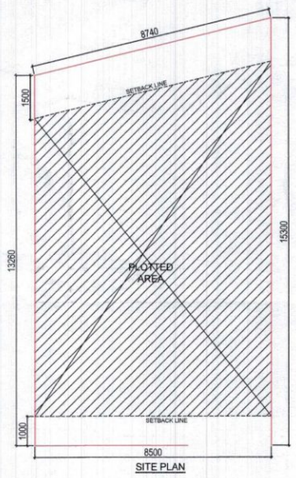


SITE PLAN

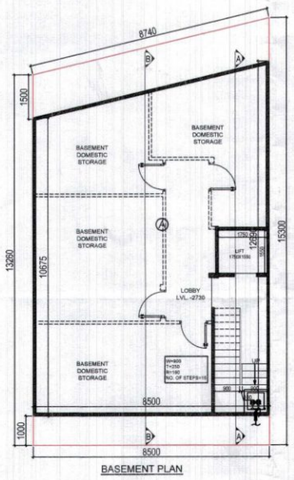


BASEMENT PLAN

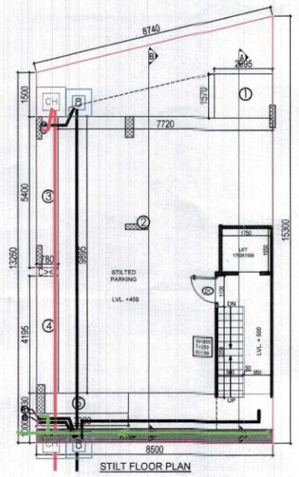


STILT FLOOR PLAN

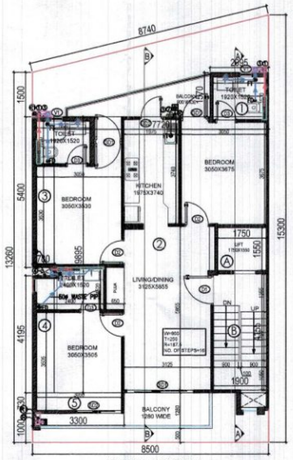


FIRST FLOOR PLAN

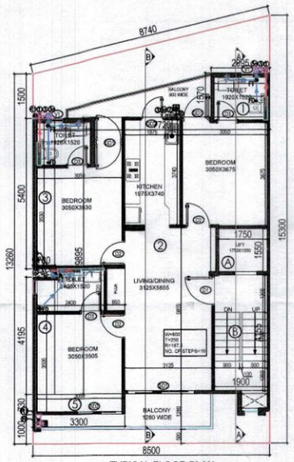


TYPICAL FLOOR PLAN
(2ND, 3RD & 4TH FLOOR)

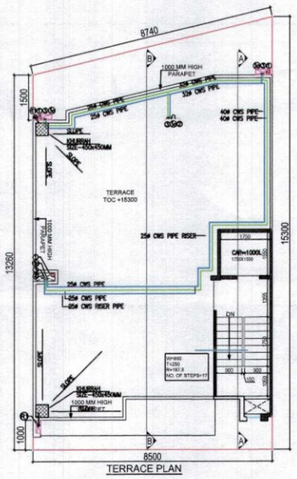


TERRACE PLAN

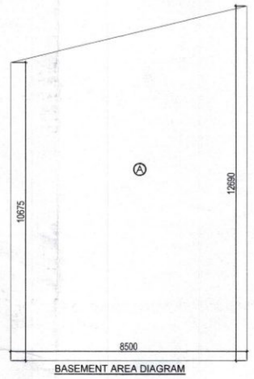


BASEMENT AREA DIAGRAM




STILT AREA DIAGRAM

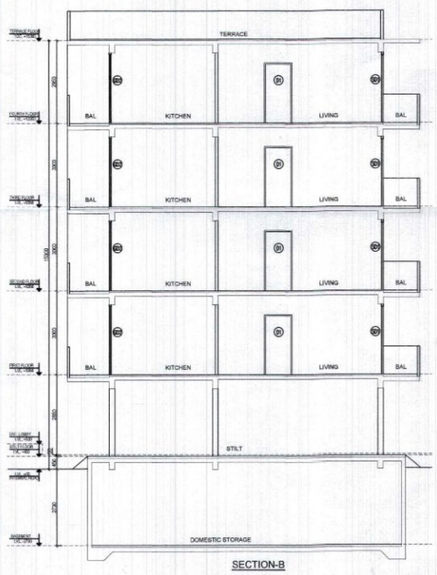


SECTION-B

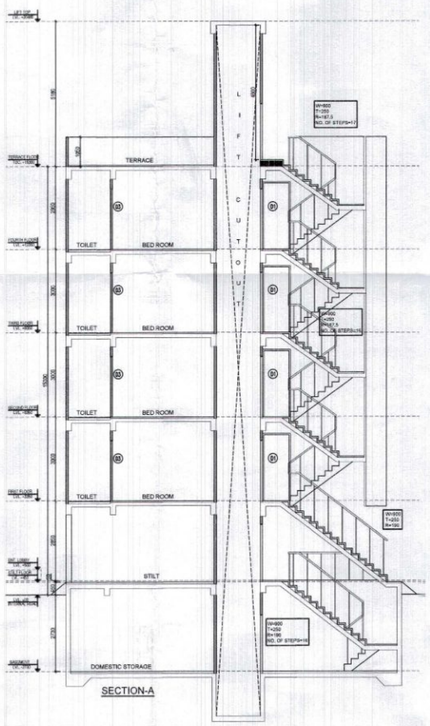


SECTION-A

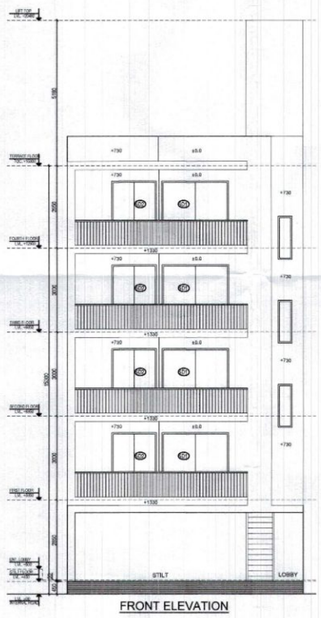


FRONT ELEVATION

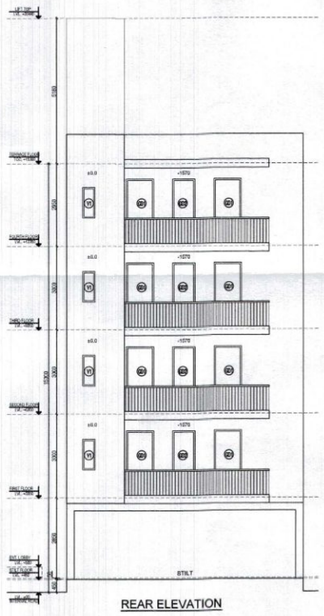

REAR ELEVATION

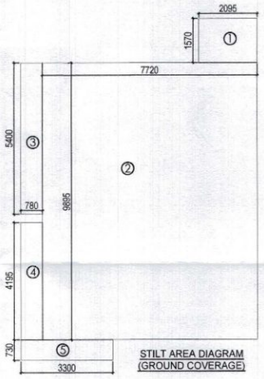

STILT AREA DIAGRAM
(GROUND COVERAGE)

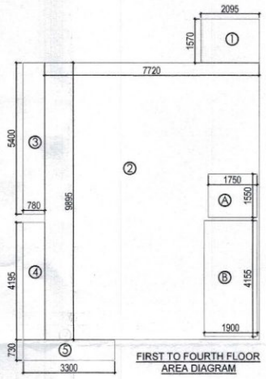

FIRST TO FOURTH FLOOR
AREA DIAGRAM




MACHINE ROOM
AREA DIAGRAM

AREA CALCULATION								
							AREA	UNIT
TOTAL PLOT AREA						=	121.388	SQ.M.
PERMISSIBLE FAR @ 2.640						=	320.464	SQ.M.
PROPOSED FAR @ 2.638						=	320.216	SQ.M.
PERMISSIBLE GR. COV. @ 75.0%						=	91.041	SQ.M.
PROPOSED GROUND COVERAGE @ 73.79%						=	89.572	SQ.M.
AREA OF STILT FLOOR (GR COVERAGE)								
1	2.095	X	1.570	X	1	=	3.289	SQ.M.
2	7.720	X	9.895	X	1	=	76.389	SQ.M.
3	0.780	X	5.400	X	1	=	4.212	SQ.M.
4	0.780	X	4.195	X	1	=	3.272	SQ.M.
5	3.300	X	0.730	X	1	=	2.409	SQ.M.
TOTAL GROUND COVERAGE						=	89.572	SQ.M.
FAR AREA OF STILT FLOOR								
1	1.930	X	1.650	X	1	=	3.185	SQ.M.
2	2.075	X	4.370	X	1	=	9.068	SQ.M.
					TOTAL	=	12.252	SQ.M.
A	1.900	X	4.155	X	1	=	7.895	SQ.M.
					TOTAL	=	7.895	SQ.M.
TOTAL FAR AREA OF STILT FLOOR						=	4.358	SQ.M.

AREA OF TYPICAL FLOOR (1ST TO 4TH)								
1	2.095	X	1.570	X	1	=	3.289	SQ.M.
2	7.720	X	9.895	X	1	=	76.389	SQ.M.
3	0.780	X	5.400	X	1	=	4.212	SQ.M.
4	0.780	X	4.195	X	1	=	3.272	SQ.M.
5	3.300	X	0.730	X	1	=	2.409	SQ.M.
					TOTAL	=	89.572	SQ.M.
DEDUCTION								
A	1.750	X	1.550	X	1	=	2.713	SQ.M.
B	1.900	X	4.155	X	1	=	7.895	SQ.M.
					TOTAL	=	10.607	SQ.M.
TOTAL AREA OF TYPICAL FLOOR						=	78.965	SQ.M.
TOTAL FLOOR AREA								
= (AREA OF TYPICAL FLOOR X 4) + STILT FLOOR AREA						=	320.216	SQ.M.
TOTAL GROUND COVERAGE								
= STILT FLOOR AREA						=	89.572	SQ.M.
BASEMENT AREA								
1	(10.875+12.690)	X	8.500	X	0.5	=	99.301	SQ.M.
TOTAL BASEMENT AREA						=	99.301	SQ.M.
MACHINE ROOM AREA								
1	1.930	X	1.765	X	1.0	=	3.406	SQ.M.
TOTAL MACHINE ROOM AREA						=	3.406	SQ.M.
TOTAL BUILT UP AREA								
(BASEMENT AREA + G. COVERAGE AT STILT FLOOR + FLOOR AREA (1ST TO 4TH) + STAIRCASE AREA X 4 + MACHINE ROOM AREA						=	539.716	SQ.M.

DOOR WINDOW SCHEDULE					
TYPE	WIDTH	HEIGHT	SILL LVL.	LINTEL LVL.	REMARKS
D1	1000	2400	± 00	2400	ENTRANCE
D2	900	2400	± 00	2150	BEDROOMS
D3	750	2400	± 00	2150	TOILETS
GD1	880	2400	± 00	2400	BEDROOM
GD2	800	2400	± 00	2400	KITCHEN
SD1	2400	2400	± 00	2400	LIVING
SD2	1800	2400	± 00	2400	BED ROOM
V1	450	1100	1050	2150	TOILETS
V2	550	1100	1050	2150	TOILET

PLUMBING LEGENDS:
- (1) 110 OD SOIL PIPE PVC SWR TYPE-B (SOLVENT JOINT)
- (2) 110 OD WASTE PIPE PVC SWR TYPE-B (SOLVENT JOINT)
- (3) COLD WATER SUPPLY DN TAKE FOR 1ST & 2ND FLR. (PVC SCH.40)
- (4) COLD WATER SUPPLY DN TAKE FOR 3RD & 4TH FLR. (PVC SCH.40)
- (5) 25Ø WATER SUPPLY RISER PIPE (PVC SCH.40)
- (R) 75 OD RWP FOR (BALCONY / TERRACE)
- (S) PVC SWR TYPE-A (TYPE-I) UNDER GROUND
- (S) 110 OD RWP FOR (TERRACE)
- (S) PVC SWR TYPE-A (TYPE-I) UNDER GROUND
- COR CLEAN OUT PLUG

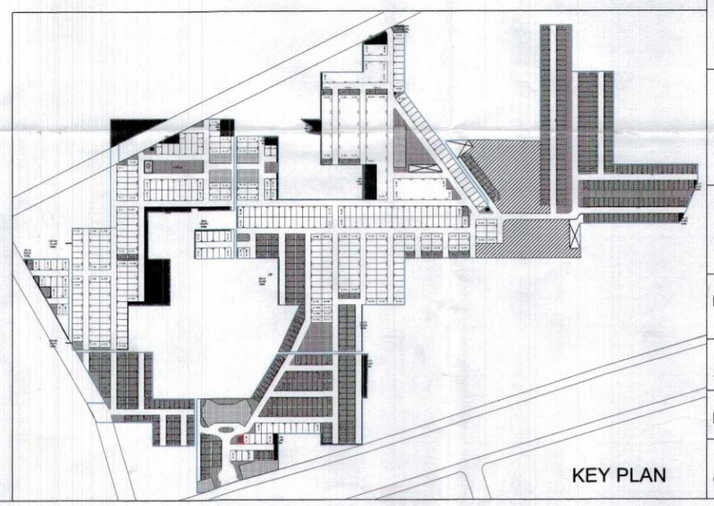

150 MM AAC WALL

100 MM AAC WALL

Memo no. 2100/10
Dtd. 04-July-2024

PROJECT:
REVISED BUILDING PLAN ON PLOT NO.- P-13 (1 PLOT) FOR AFFORDABLE RESIDENTIAL PLOTTED COLONY (UNDER DEEN-DAYAL JAN AWAS YOJNA) OVER AN AREA 57.40 ACRES (LICENCE NO.32 OF 2021 DATED 03.07.2021 FOR AN AREA MEASURING 52.275 ACRES & LICENCE NO. 102 OF 2022 DATED 27.02.2022 FOR AN AREA MEASURING 5.125 ACRES) IN THE REVENUE ESTATE OF VILLAGE-HAYATPUR, SECTOR 89, GURUGRAM BEING DEVELOPD BY AAWAM RESIDENCY PRIVATE LIMITED & OTHERS IN COLLABORATION WITH ADHIKAANSH REALTORS PRIVATE LIMITED.

ARCHITECT:
GIAN P. MATHUR AND ASSOCIATES (P) LTD.
C - 55, East Of Kailash, New Delhi-110065
T : 46599599 I F 46599512
E : info@gpmindia.com I W : www.gpmindia.com

DRAWING TITLE :
TYPE P13 - FLOOR PLANS WITH AREA CALCULATION, ELEVATIONS & SECTIONS


D.N. - SW-VL-18

SCALE:- 1:100


DRAWN BY:- ALI

CHECK BY:- NAMITA


ARCHITECT'S SIGN	AUTHORIZED SIGN
GIAN P. MATHUR ARCHITECT B. Arch., M.C.A. I.I.A CA No. 80/5769	

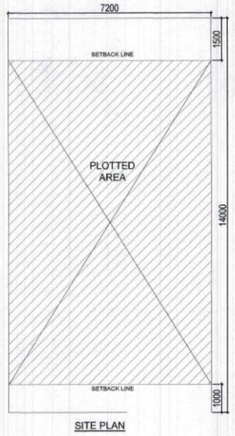


SITE PLAN

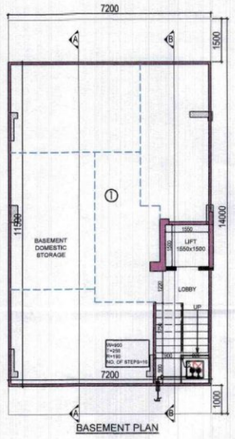


BASEMENT PLAN

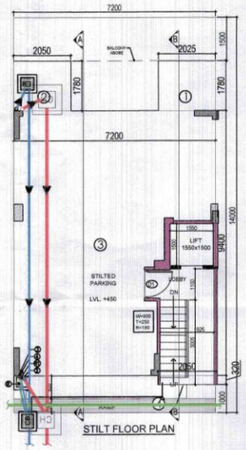


STILT FLOOR PLAN

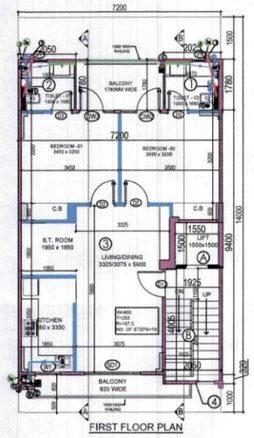


FIRST FLOOR PLAN

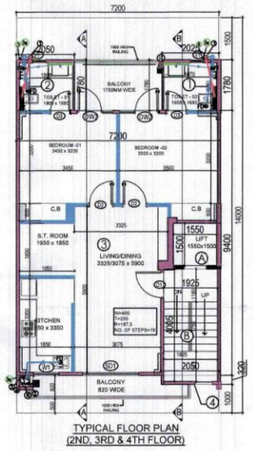


TYPICAL FLOOR PLAN (2ND, 3RD & 4TH FLOOR)

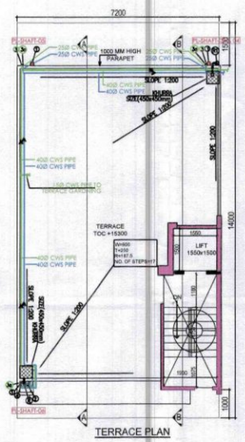


TERRACE PLAN

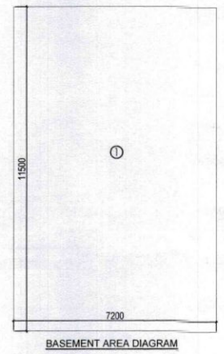

BASEMENT AREA DIAGRAM

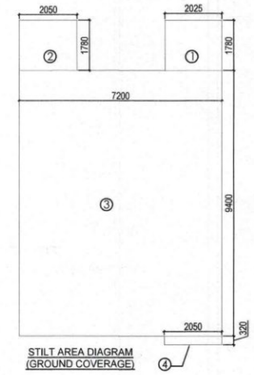


STILT AREA DIAGRAM (GROUND COVERAGE)

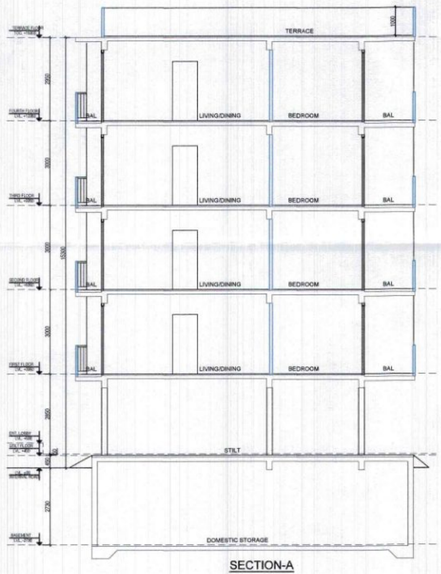


SECTION-A




SECTION-B

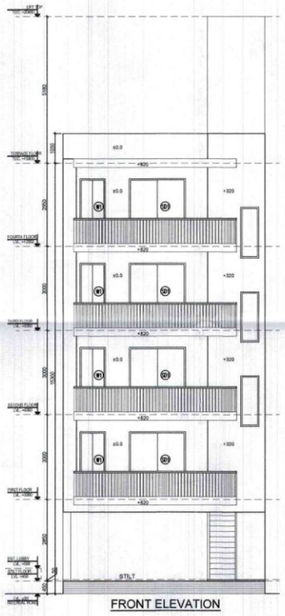

FRONT ELEVATION

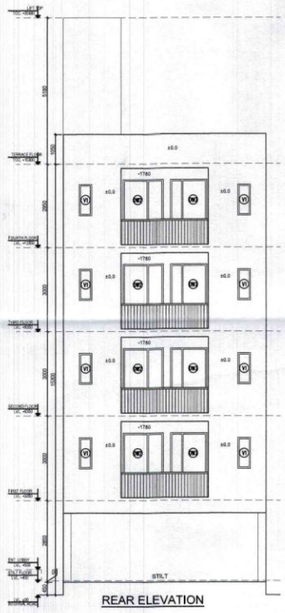

REAR ELEVATION

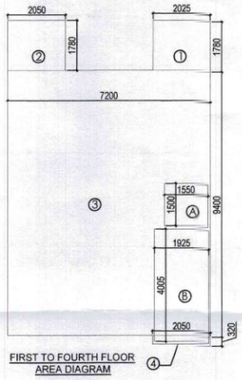

FIRST TO FOURTH FLOOR AREA DIAGRAM



STILT AREA DIAGRAM



MACHINE ROOM AREA DIAGRAM

100 MM RCC WALL

100 MM AAC WALL


AREA CALCULATION								
							AREA	UNIT
TOTAL PLOT AREA (7.20 X 14.00)						=	100.800	SQ.M.
PERMISSIBLE FAR @ 2.640						=	266.112	SQ.M.
PROPOSED FAR @ 2.632						=	265.349	SQ.M.
PERMISSIBLE GR. COV. @ 75.0%						=	75.600	SQ.M.
PROPOSED GROUND COVERAGE @ 74.99%						=	75.590	SQ.M.
AREA OF STILT FLOOR (GR COVERAGE)								
1	2.025	X	1.780	X	1	=	3.605	SQ.M.
2	2.050	X	1.780	X	1	=	3.649	SQ.M.
3	7.200	X	9.400	X	1	=	67.680	SQ.M.
4	2.050	X	0.320	X	1	=	0.656	SQ.M.
TOTAL GROUND COVERAGE						=	75.590	SQ.M.
FAR AREA OF STILT FLOOR								
1	1.825	X	1.715	X	1	=	3.130	SQ.M.
					TOTAL	=	3.130	SQ.M.
TOTAL FAR AREA OF STILT FLOOR						=	3.130	SQ.M.

AREA OF TYPICAL FLOOR (1ST TO 4TH)								
1	2.025	X	1.780	X	1	=	3.605	SQ.M.
2	2.050	X	1.780	X	1	=	3.649	SQ.M.
3	7.200	X	9.400	X	1	=	67.680	SQ.M.
4	2.050	X	0.320	X	1	=	0.656	SQ.M.
					TOTAL	=	75.590	SQ.M.
DEDUCTION								
A	1.550	X	1.500	X	1	=	2.325	SQ.M.
B	1.925	X	4.005	X	1	=	7.710	SQ.M.
					TOTAL	=	10.035	SQ.M.
TOTAL AREA OF TYPICAL FLOOR						=	65.555	SQ.M.
TOTAL FLOOR AREA								
= (AREA OF TYPICAL FLOOR X 4) + STILT FLOOR AREA						=	265.349	SQ.M.
TOTAL GROUND COVERAGE = STILT FLOOR AREA						=	75.590	SQ.M.
BASEMENT AREA								
A	7.200	X	11.500	X	1	=	82.800	SQ.M.
TOTAL BASEMENT AREA						=	82.800	SQ.M.
MACHINE ROOM AREA								
A	1.825	X	1.715	X	1	=	3.130	SQ.M.
TOTAL MACHINE ROOM AREA						=	3.130	SQ.M.
TOTAL BUILT UP AREA								
(BASEMENT AREA + G. COVERAGE AT STILT FLOOR + FLOOR AREA (1ST TO 4TH) + STAIRCASE AREA X 4 + MACHINE ROOM AREA						=	454.577	SQ.M.

PLUMBING LEGENDS:

(1)	110 OD WASTE PIPE PVC SWR TYPE-B (SOLVENT JOINT)
(2)	COLD WATER SUPPLY ON TAKE FOR 1ST & 2ND FLR. (PVC SCH.40)
(3)	COLD WATER SUPPLY ON TAKE FOR 3RD & 4TH FLR. (PVC SCH.40)
(4)	25ø WATER SUPPLY RISER PIPE (PVC SCH.40)
(R)	75 OD RWP FOR (TERRACE/BALCONY) PVC SWR TYPE-A, TYPE-B UNDER GROUND
COP	CLEAN OUT PLUG

DOOR WINDOW SCHEDULE					
TYPE	WIDTH	HEIGHT	SILL LVL.	LINTEL LVL.	REMARKS
D1	900	2400	± 00	2400	ENTRANCE
D2	900	2400	± 00	2150	BEDROOMS
D3	750	2400	± 00	2150	TOILETS
DW2	900/525	2400/1500	± 00 / 900	2400	BED ROOM
DW3	900/370	2400/1500	± 00 / 900	2400	BED ROOM
SD1	2000	2400	± 00	2400	LIVING
W1	900	1200	1200	2400	KITCHEN
V1	450	1100	1050	2150	TOILETS

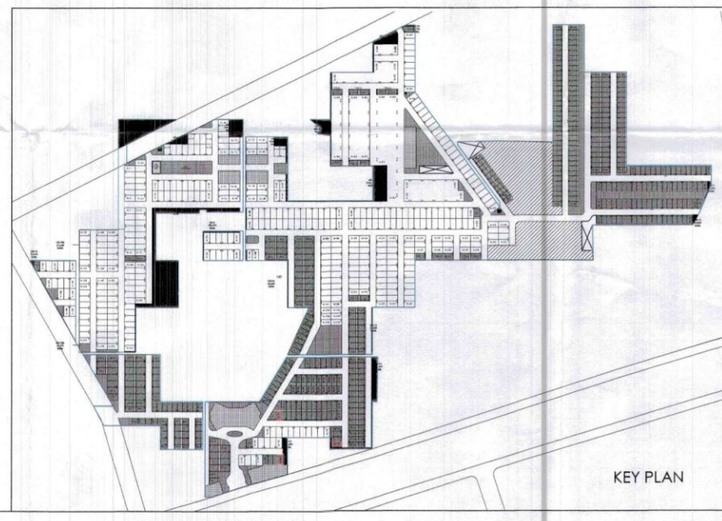
KEY PLAN

Memo no. 2100/02
Dtd. 04-July-2024

PROJECT:
REVISED BUILDING PLAN ON PLOT NO.- B- 277 & 278 (2 PLOTS) FOR AFFORDABLE RESIDENTIAL PLOTTED COLONY (UNDER DEEN-DAYAL JAN AWAS YOJNA) OVER AN AREA 57.40 ACRES (LICENCE NO.32 OF 2021 DATED 03.07.2021 FOR AN AREA MEASURING 52.275 ACRES & LICENCE NO. 102 OF 2022 DATED 27.02.2022 FOR AN AREA MEASURING 5.125 ACRES) IN THE REVENUE ESTATE OF VILLAGE-HAYATPUR, SECTOR 89, GURUGRAM BEING DEVELOPD BY AAWAM RESIDENCY PRIVATE LIMITED & OTHERS IN COLLABORATION WITH ADHIKAANSH REALTORS PRIVATE LIMITED

ARCHITECT:
GIAN P. MATHUR AND ASSOCIATES (P) LTD.
C - 55, East Of Kailash, New Delhi-110065
T : 46599599 I F 46599512
E : info@gpmindia.com I W : www.gpmindia.com

DRAWING TITLE :
TYPE B - FLOOR PLANS WITH AREA CALCULATION, ELEVATIONS & SECTIONS (RIGHT SIDE CORNER)

D.N. - SW-VL-09g

SCALE:- 1:100


DRAWN BY:- ALI

CHECK BY:- NAMITA


ARCHITECT'S SIGN

GIAN P. MATHUR
ARCHITECT
B. Arch., M.C.A. I.I.A
CA No. 80/5769


AUTHORIZED SIGN

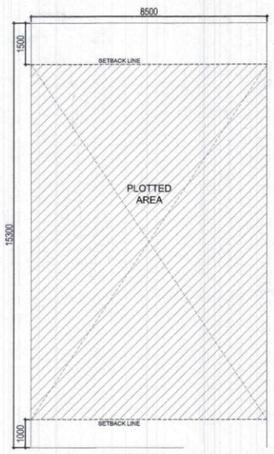


SITE PLAN

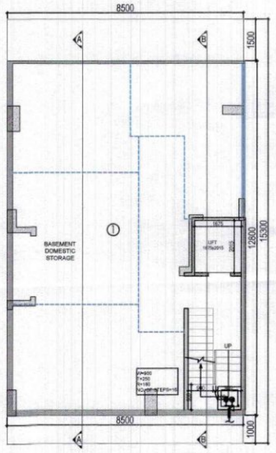


BASEMENT PLAN

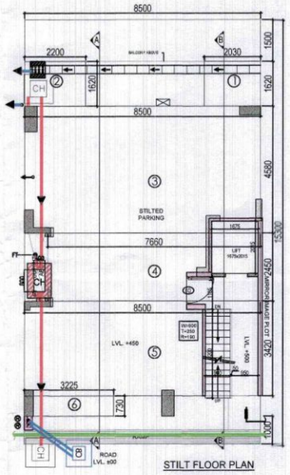


STILT FLOOR PLAN

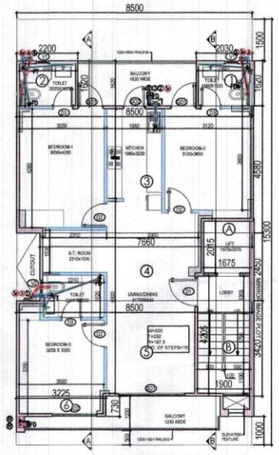


FIRST FLOOR PLAN

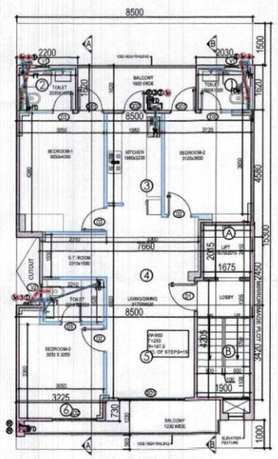


TYPICAL FLOOR PLAN
(2ND, 3RD & 4TH FLOOR)

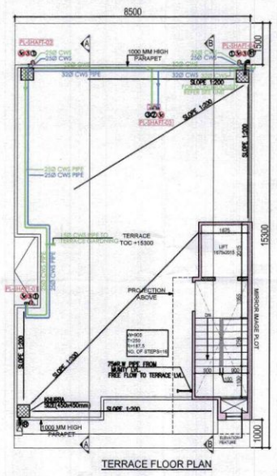


TERRACE FLOOR PLAN

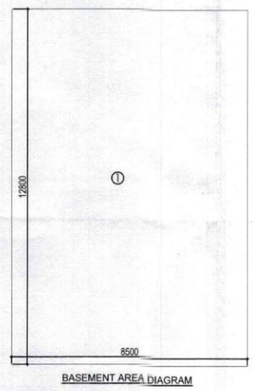


BASEMENT AREA DIAGRAM

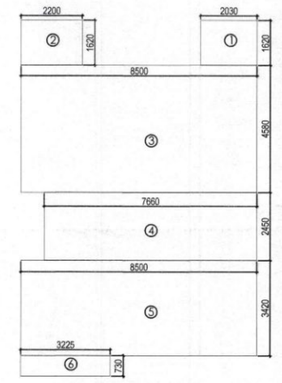


STILT AREA DIAGRAM
(GROUND COVERAGE)

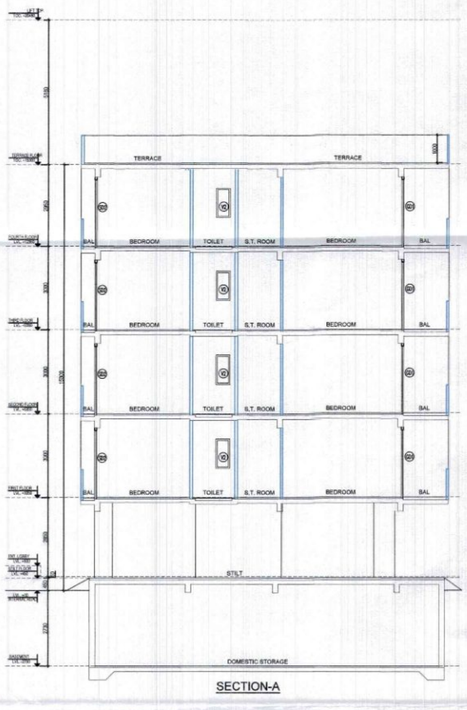


SECTION-A

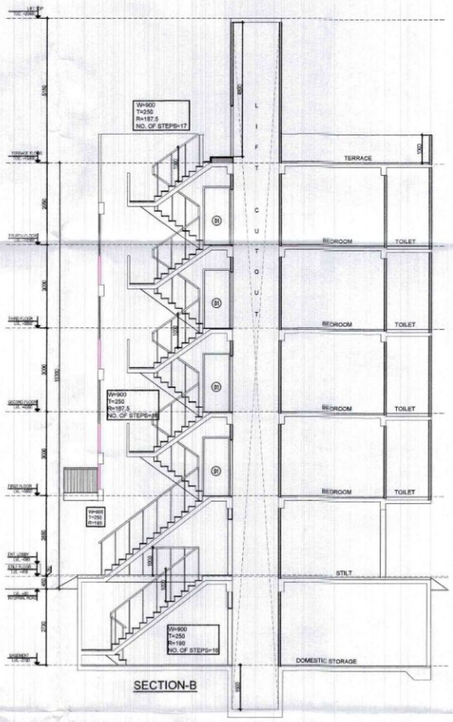


SECTION-B

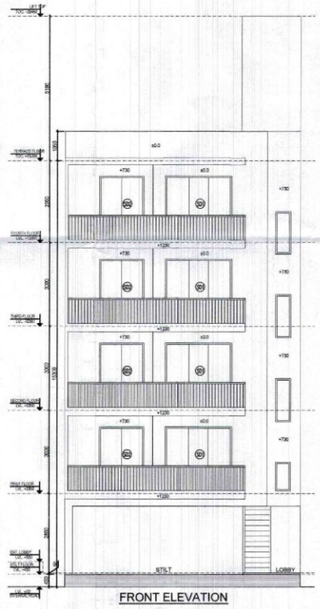

FRONT ELEVATION

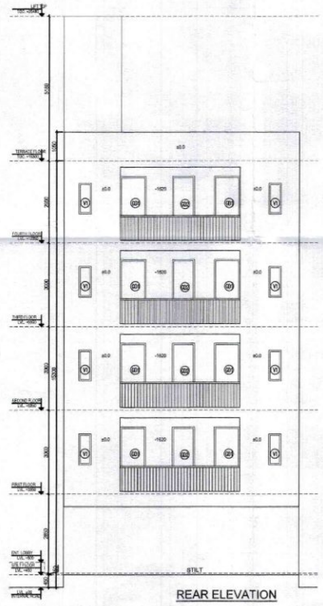

REAR ELEVATION

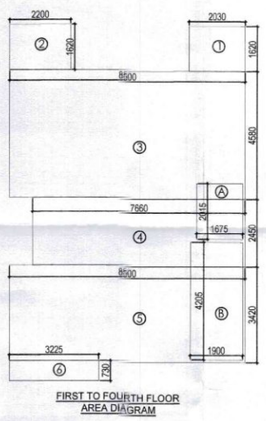

FIRST TO FOURTH FLOOR
AREA DIAGRAM



MACHINE ROOM
AREA DIAGRAM

STILT FLOOR
AREA DIAGRAM

AREA CALCULATION								
							AREA	UNIT
TOTAL PLOT AREA (8.50 X 15.30)						=	130.050	SQ.M.
PERMISSIBLE FAR @ 2.640						=	343.332	SQ.M.
PROPOSED FAR @ 2.640						=	342.822	SQ.M.
PERMISSIBLE GR. COV. @ 75.0%						=	97.538	SQ.M.
PROPOSED GROUND COVERAGE @ 73.80%						=	95.974	SQ.M.

AREA OF STILT FLOOR (GR COVERAGE)								
1	2.030	X	1.620	X	1	=	3.289	SQ.M.
2	2.200	X	1.620	X	1	=	3.564	SQ.M.
3	8.500	X	4.580	X	1	=	38.930	SQ.M.
4	7.660	X	2.450	X	1	=	18.767	SQ.M.
5	8.500	X	3.420	X	1	=	29.070	SQ.M.
6	3.225	X	0.730	X	1	=	2.354	SQ.M.
TOTAL AREA OF STILT FLOOR						=	95.974	SQ.M.


FAR AREA OF STILT FLOOR								
1	1.950	X	2.095	X	1	=	4.085	SQ.M.
					TOTAL	=	4.085	SQ.M.
TOTAL FAR AREA OF STILT FLOOR						=	4.085	SQ.M.

AREA OF TYPICAL FLOOR (1ST TO 4TH)								
1	2.030	X	1.620	X	1	=	3.289	SQ.M.
2	2.200	X	1.620	X	1	=	3.564	SQ.M.
3	8.500	X	4.580	X	1	=	38.930	SQ.M.
4	7.660	X	2.450	X	1	=	18.767	SQ.M.
5	8.500	X	3.420	X	1	=	29.070	SQ.M.
6	3.225	X	0.730	X	1	=	2.354	SQ.M.
					TOTAL	=	95.974	SQ.M.
DEDUCTION								
A	1.675	X	2.015	X	1	=	3.375	SQ.M.
B	1.900	X	4.205	X	1	=	7.990	SQ.M.
					TOTAL	=	11.365	SQ.M.
TOTAL AREA OF TYPICAL FLOOR						=	84.609	SQ.M.
TOTAL FLOOR AREA								
= (AREA OF TYPICAL FLOOR X 4) + STILT FLOOR AREA						=	342.822	SQ.M.
TOTAL GROUND COVERAGE = STILT FLOOR AREA						=	95.974	SQ.M.
BASEMENT AREA								
A	8.500	X	12.800	X	1	=	108.800	SQ.M.
TOTAL BASEMENT AREA						=	108.800	SQ.M.
MACHINE ROOM AREA								
1	1.950	X	2.085	X	1	=	4.085	SQ.M.
TOTAL MACHINE ROOM AREA						=	4.085	SQ.M.
TOTAL BUILT UP AREA								
(BASEMENT AREA + G. COVERAGE AT STILT FLOOR + FLOOR AREA (1ST TO 4TH) + STAIRCASE AREA X 4 + MACHINE ROOM AREA						=	579.254	SQ.M.

PLUMBING LEGENDS

(1) 110 OD WASTE PIPE PVC SWR TYPE–B (SOLVENT JOINT)
(2) 110 OD WASTE PIPE PVC SWR TYPE–B (SOLVENT JOINT)
(3) COLD WATER SUPPLY DN TAKE FOR 1ST & 2ND FLR. (PVC SCH.40)
(3a) COLD WATER SUPPLY DN TAKE FOR 3RD & 4TH FLR. (PVC SCH.40)
(4) 25Ø WATER SUPPLY RISER PIPE (PVC SCH.40)
(R) 75 OD RWP FOR (TERRACE/BALCONY)
PVC SWR TYPE–A ;TYPE–B UNDER GROUND
COP CLEAN OUT PLUG

DOOR WINDOW SCHEDULE					
TYPE	WIDTH	HEIGHT	SILL LVL.	LINTEL LVL.	REMARKS
D1	1000	2400	±00	2400	ENTRANCE
D2	900	2400	±00	2150	BEDROOMS
D3	750	2400	±00	2150	TOILETS
GD1	925	2400	±00	2400	BEDROOMS
GD2	800	2400	±00	2400	KITCHEN
SD1	2400	2400	±00	2400	BEDROOM
SD2	1800	2400	±00	2400	LIVING
V1	450	1100	1050	2150	TOILETS
V2	500	1100	1050	2150	TOILET

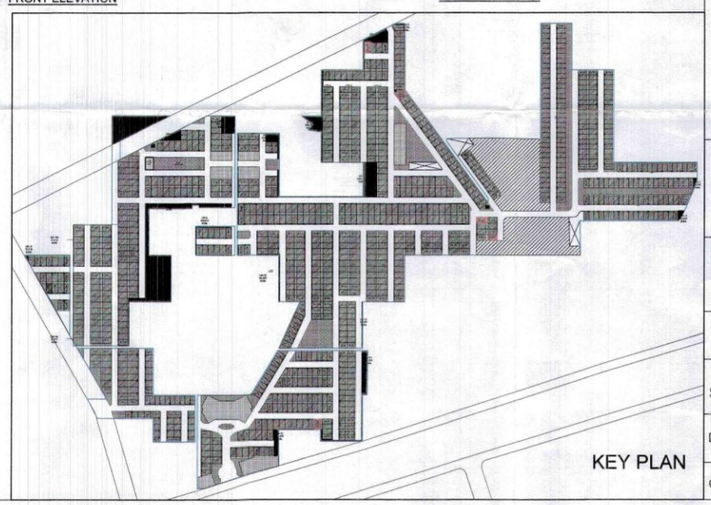

Memo no. 2100 /01
Dtd. 04-July-2024

100 MM RCC WALL
100 MM AAC WALL

PROJECT:
REVISED BUILDING PLAN ON PLOT NO.- A-175, 420, 434, 461 & 465 (5 PLOTS) FOR AFFORDABLE RESIDENTIAL PLOTTED COLONY (UNDER DEEN-DAYAL JAN AWAS YOJNA) OVER AN AREA 57.40 ACRES (LICENCE NO.32 OF 2021 DATED 03.07.2021 FOR AN AREA MEASURING 52.275 ACRES & LICENCE NO. 102 OF 2022 DATED 27.02.2022 FOR AN AREA MEASURING 5.125 ACRES) IN THE REVENUE ESTATE OF VILLAGE-HAYATPUR, SECTOR 89, GURUGRAM BEING DEVELOPD BY AAWAM RESIDENCY PRIVATE LIMITED & OTHERS IN COLLABORATION WITH ADHIKAANSH REALTORS PRIVATE LIMITED.

ARCHITECT:
GIAN P. MATHUR AND ASSOCIATES (P) LTD.
C - 55, East Of Kailash, New Delhi-110065
T : 46599599 I F 46599512
E : info@gpmindia.com I W : www.gpmindia.com

DRAWING TITLE :
TYPE A - FLOOR PLANS WITH AREA CALCULATION, ELEVATIONS & SECTIONS (RIGHT SIDE CORNER)

D.N. - SW-VL-01c
SCALE:- 1:100
DRAWN BY:- ALI
CHECK BY:- NAMITA

ARCHITECTS SIGN
GIAN P. MATHUR
ARCHITECT
B. Arch., M.C.A. I.I.A
CA No. 8075769

AUTHORIZED SIGN