DEMARCATION PLAN

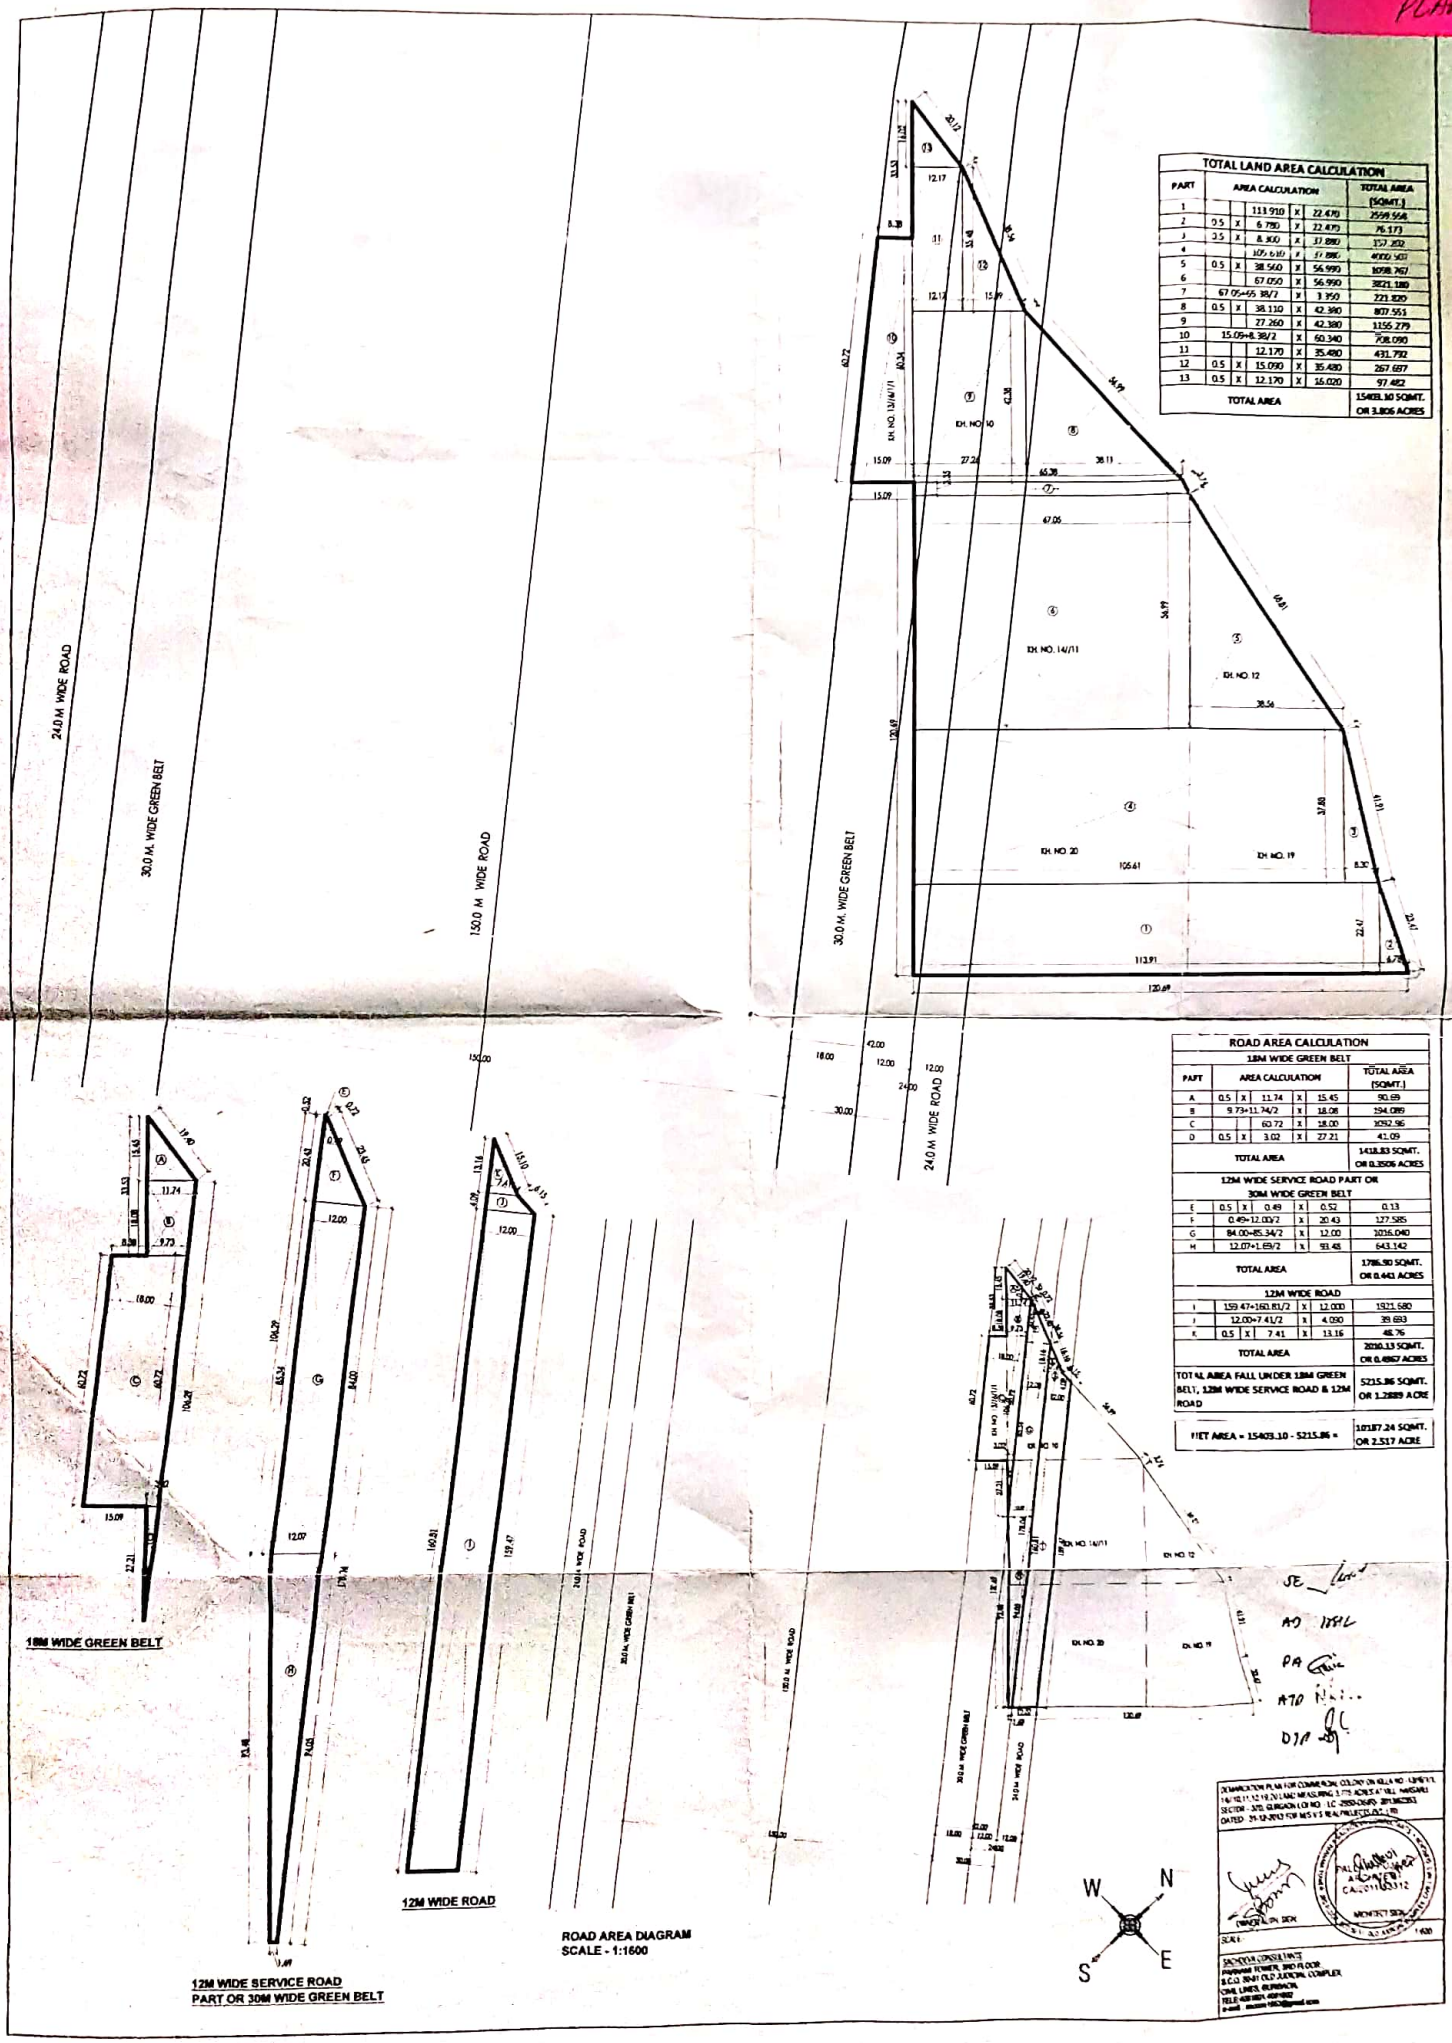

TOTAL LAND AREA CALCULATION						
PART	AREA CALCULATION					TOTAL AREA (SQMT.)
1			113.910	X	22.470	2559.558
2	0.5	X	6.780	X	22.470	76.173
3	0.5	X	8.300	X	37.880	157.202
4			105.610	X	37.880	4000.507
5	0.5	X	38.560	X	56.990	1098.767
6			67.050	X	56.990	3821.180
7	67.05+65.38/2			X	3.350	221.820
8	0.5	X	38.110	X	42.380	807.551
9			27.260	X	42.380	1155.279
10	15.09+8.38/2			X	60.340	708.090
11			12.170	X	35.480	431.792
12	0.5	X	15.090	X	35.480	267.697
13	0.5	X	12.170	X	16.020	97.482
TOTAL AREA						15403.10 SQMT. OR 3.806 ACRES

ROAD AREA CALCULATION						
18M WIDE GREEN BELT						
PART	AREA CALCULATION					TOTAL AREA (SQMT.)
A	0.5	X	11.74	X	15.45	90.69
B	9.73+11.74/2			X	18.08	194.089
C			60.72	X	18.00	1092.96
D	0.5	X	3.02	X	27.21	41.09
TOTAL AREA						1418.83 SQMT. OR 0.3506 ACRES
12M WIDE SERVICE ROAD PART OR 30M WIDE GREEN BELT						
E	0.5	X	0.49	X	0.52	0.13
F	0.49+12.00/2			X	20.43	127.585
G	84.00+85.34/2			X	12.00	1016.040
H	12.07+1.69/2			X	93.48	643.142
TOTAL AREA						1786.90 SQMT. OR 0.441 ACRES
12M WIDE ROAD						
I	159.47+160.81/2			X	12.000	1921.680
J	12.00+7.41/2			X	4.090	39.693
K	0.5	X	7.41	X	13.16	48.76
TOTAL AREA						2010.13 SQMT. OR 0.4967 ACRES
TOTAL AREA FALL UNDER 18M GREEN BELT, 12M WIDE SERVICE ROAD & 12M ROAD						5215.86 SQMT. OR 1.2889 ACRE
NET AREA = 15403.10 - 5215.86 =						10187.24 SQMT. OR 2.517 ACRE

ROAD AREA DIAGRAM
SCALE - 1:1600

DEMARCATION PLAN FOR COMMERCIAL COLONY ON KILLA NO. 13/16/11, 14/10/11, 12/19/20 LAND MEASURING 3.775 ACRES AT MILL NARSARI SECTOR - 37D, GURGAON LOT NO. LC-2550-DEBS-2013/62353 DATED 31-12-2013 FOR M/S V.S. REALPROJECTS PVT. LTD.

DIRECTOR IN SEN

MONTEST SEN

SCALE - 1:600

SACHDEVA CONSULTANTS
PARWANI TOWER, 3RD FLOOR
B.C.O. 30-31 OLD JUDICIAL COMPLEX
CIVIL LINES, GURGAON
TELE: 4081801, 4081802
e-mail: [illegible]

SE
AD
PA
ATP
DTP