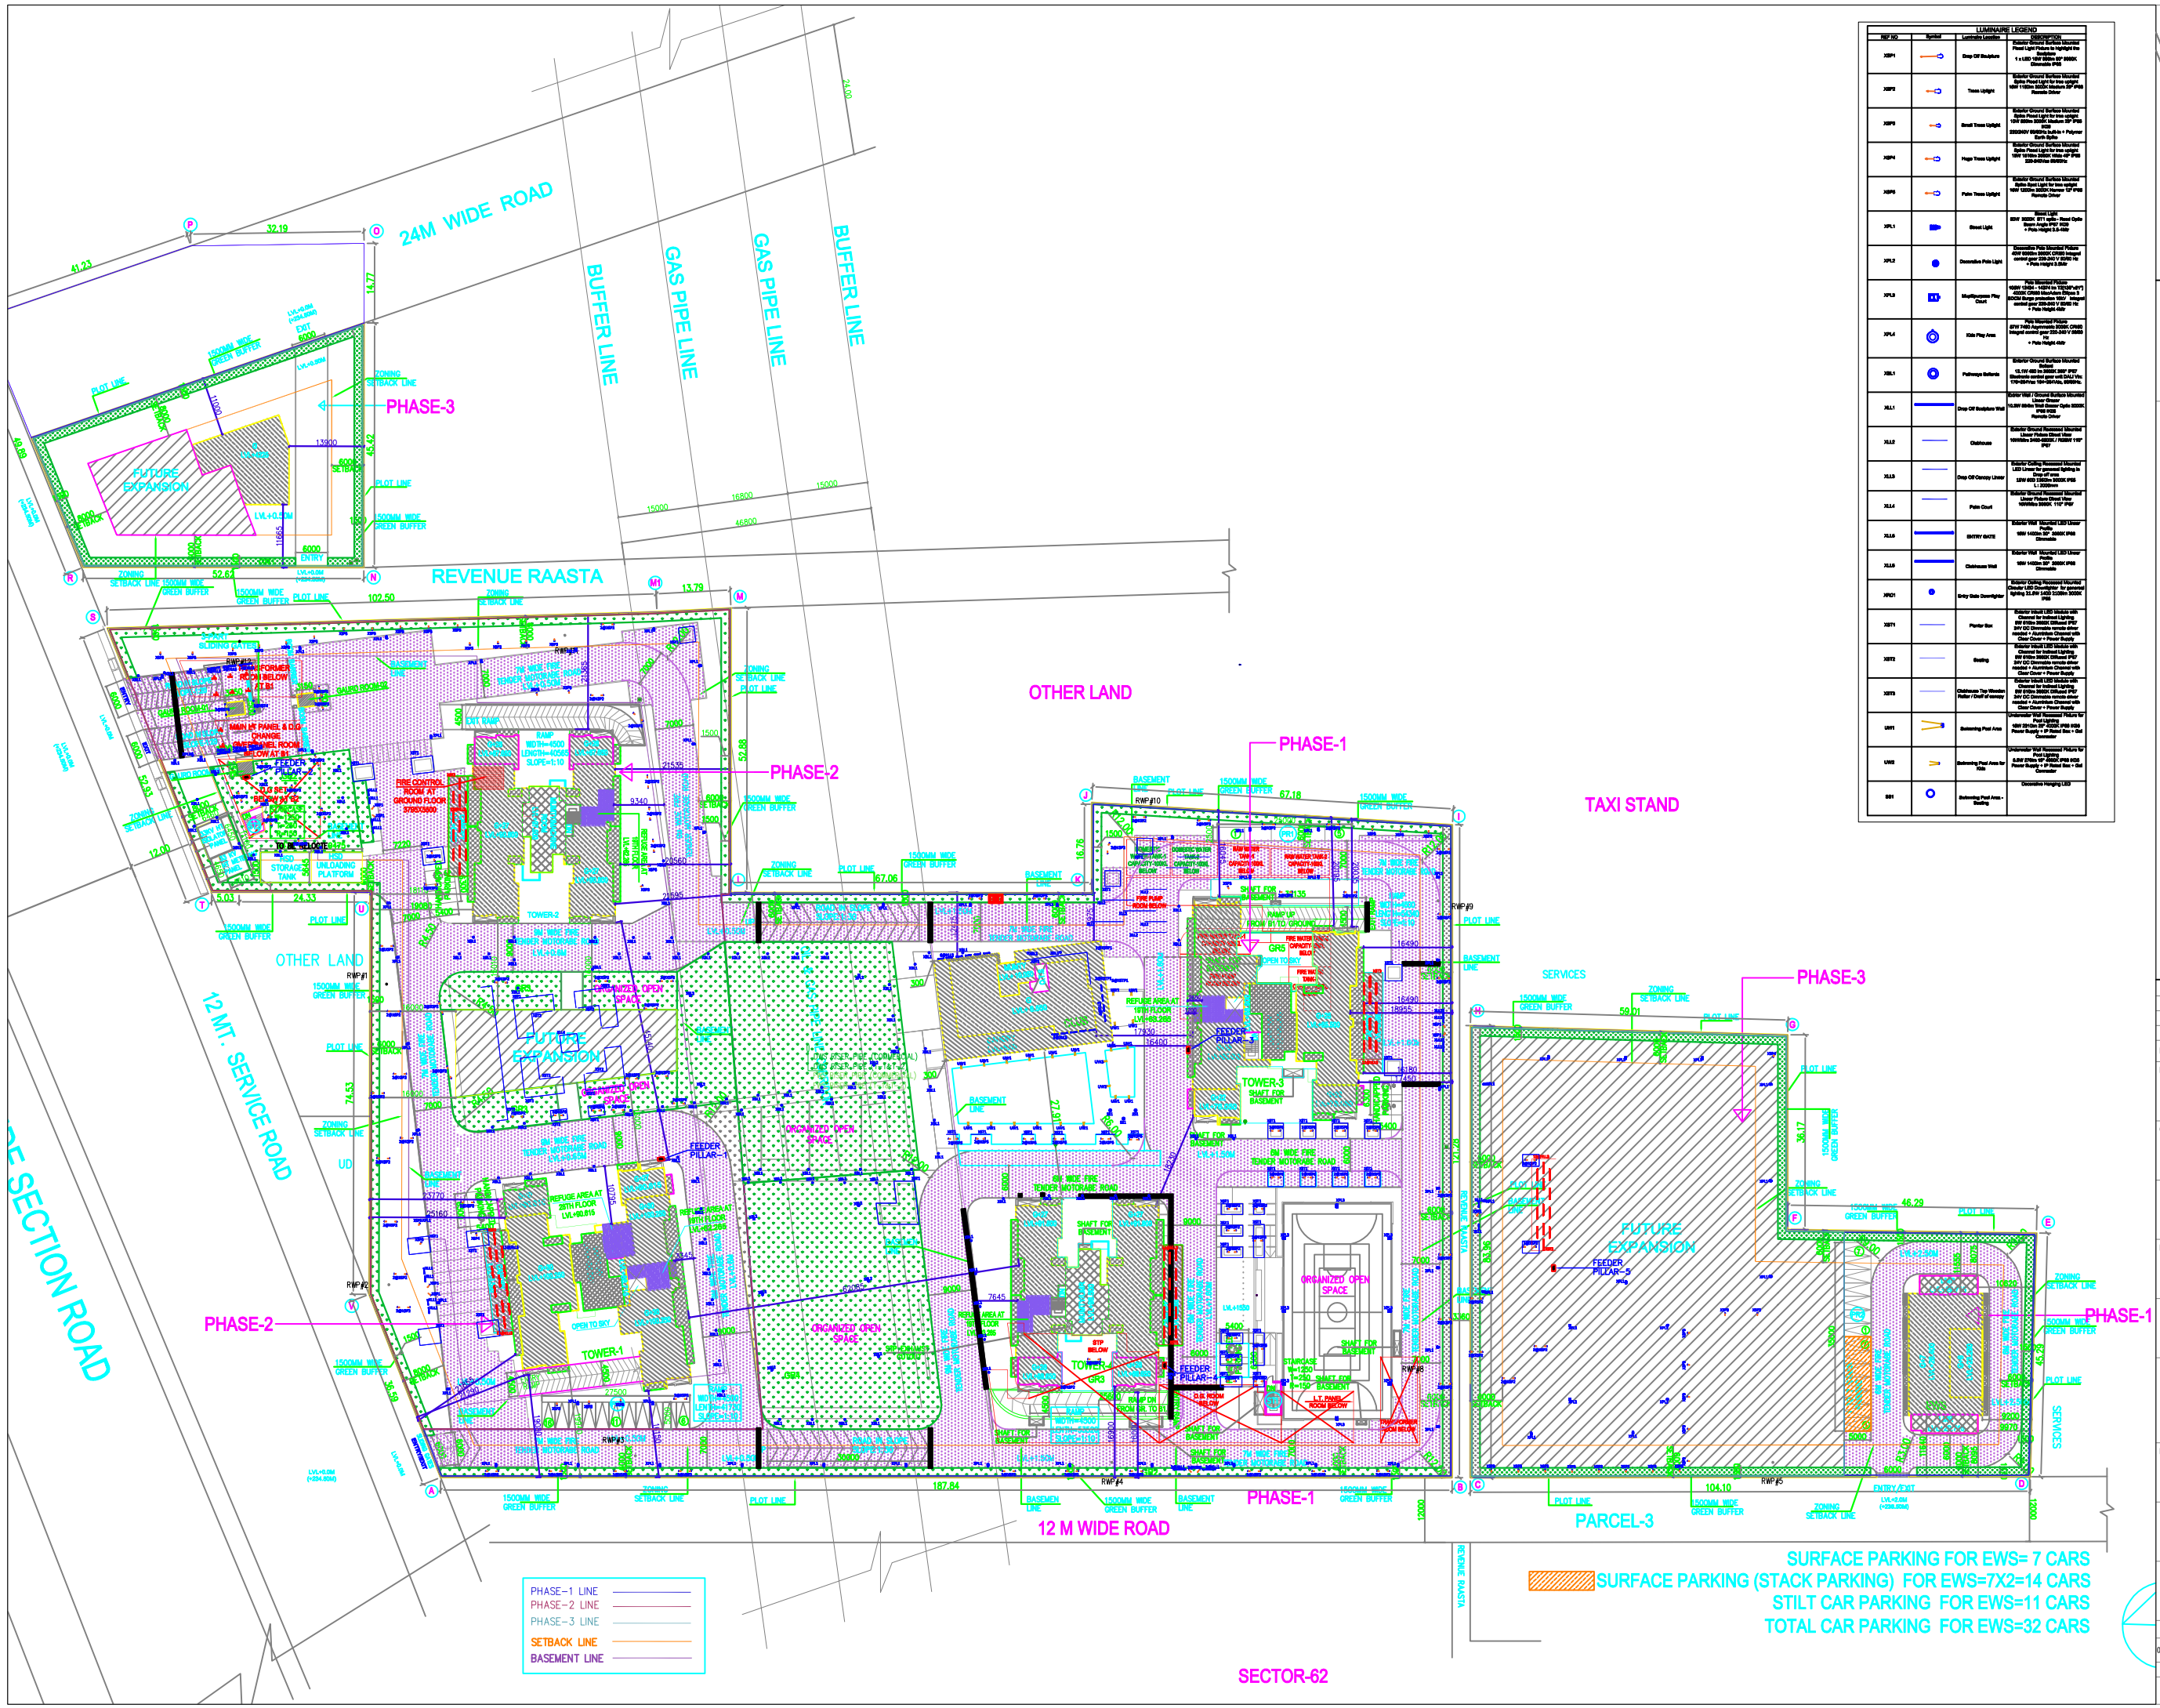

LUMINAIRE LEGEND			
REF NO	Symbol	Luminaire Location	DESCRIPTION
XSP1		Drop Off Sculpture	Exterior Ground Surface Mounted Flood Light Fixture to Highlight the Sculpture 1 x LED 10W 3000lm 60° 5000K Dimmable IP65
XSP2		Trees Uplight	Exterior Ground Surface Mounted Spike Flood Light for tree uplight 18W 1100lm 3000K Medium 30° IP65 Remote Driver
XSP3		Small Trees Uplight	Exterior Ground Surface Mounted Spike Flood Light for tree uplight 10W 800lm 3000K Medium 30° IP65 IK08 220/240V 50/60Hz,Bulb + Polymer Earth Spike
XSP4		Huge Trees Uplight	Exterior Ground Surface Mounted Spike Flood Light for tree uplight 18W 1100lm 3000K Medium 30° IP65 220-240Vac 50/60Hz
XSP5		Palm Trees Uplight	Exterior Ground Surface Mounted Spike Spot Light for tree uplight 10W 1200lm 3000K Narrow 10° IP65 Remote Driver
XPL1		Street Light	Street Light 60W 3000K 8711 optic - Road Cycle optic,height 9-12 meter + Pole Height 3.5-4m
XPL2		Decorative Pole Light	Decorative Pole Mounted Picture 40W 6000lm 3000K CRI80 Integral control gear 230-240 V 50/60 Hz + Pole Height 3.5M
XPL3		Multipurpose Play Court	Pole Mounted Picture 100W 12400 - 14000 lm 120°(90°x70°) 4000K CRI 70 Integral control gear 230-240 V 50/60 Hz IP65 IK08 Pole Height 3.5-4m Integral control gear 230-240 V 50/60 Hz + Pole Height 4M
XPL4		Kids Play Area	Pole Mounted Picture 27W 2400 Asymmetric 3000K CRI80 Integral control gear 220-240 V 50/60 Hz + Pole Height 4M
XBL1		Pathways Bollards	Exterior Ground Surface Mounted Bollard 12.1W 450 lm 3000K 360° IP67 Electronic control gear with DALI Vin 170-264Vac 100-264Vac, 50/60Hz.
XLL1		Drop Off Sculpture Wall	Exterior Wall / Ground Surface Mounted Linear Picture Down Wash 10.8W 864lm Wall Grazer Optic 3000K IP65 IK08 Remote Driver
XLL2		Clubhouse	Exterior Ground Recessed Mounted Linear Picture Down Wash 10W/600lm 3000K CRI80 Integral 110° IP67
XLL3		Drop Off Canopy Linear	Exterior Ceiling Recessed Mounted LED Linear for canopy lighting in drop off area 32W 4000 3000K 3000K IP65 L:2000mm
XLL4		Palm Court	Exterior Ground Recessed Mounted Linear Picture Down Wash 10W/600lm 3000K 110° IP67
XLL5		ENTRY GATE	Exterior Wall Mounted LED Linear Profile 18W 1400lm 30° 3000K IP65 Dimmable
XLL6		Clubhouse Wall	Exterior Wall Mounted LED Linear Profile 18W 1400lm 30° 3000K IP65 Dimmable
XRD1		Entry Gate Downlighter	Exterior Ceiling Recessed Mounted Circular LED Downlighter for personal lighting 10.8W 1400 3000lm 3000K IP65
XST1		Planter Box	Exterior Inbuilt LED Module with Channel for Indirect Lighting 3W 600lm 3000K Diffused IP67 24V DC Dimmable remote driver installed + Aluminium Channel with Clear Cover + Power Supply
XST2		Seating	Exterior Inbuilt LED Module with Channel for Indirect Lighting 3W 600lm 3000K Diffused IP67 24V DC Dimmable remote driver installed + Aluminium Channel with Clear Cover + Power Supply
XST3		Clubhouse Top Wooden Rafter / Shelf of canopy	Exterior Inbuilt LED Module with Channel for Indirect Lighting 3W 600lm 3000K Diffused IP67 24V DC Dimmable remote driver installed + Aluminium Channel with Clear Cover + Power Supply
UW1		Swimming Pool Area	Underwater Wall Recessed Fixture for Pool Lighting 18W 2000lm 30° 4000K IP68 IK08 Power Supply + IP Rated Box + Cut Connector
UW2		Swimming Pool Area for Kids	Underwater Wall Recessed Fixture for Pool Lighting 6.8W 270lm 30° 3000K IP68 IK08 Power Supply + IP Rated Box + Cut Connector
SD1		Swimming Pool Area - Seating	Downlight Hanging LED

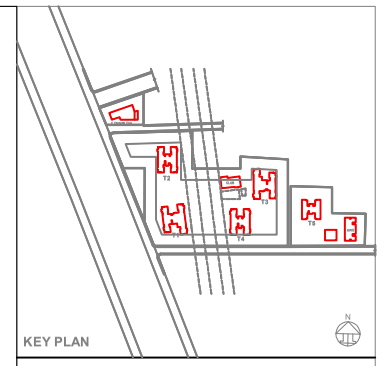

NOTE :-
1. ALL THE DIMENSIONS MENTIONED ARE IN MM.
2. FFL - INDICATES FINISHED FLOOR LEVEL
FRL - INDICATES FINISHED ROAD LEVEL
3. +/-0.00 FFL CORRESPONDS TO FRL AT SITE
4. ALL DIMENSIONS SHALL BE VERIFIED ON SITE PRIOR TO START OF WORK. ANY DISCREPANCY SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT.
5. THIS DRAWING IS TO BE READ AND NOT TO BE SCALED.
6. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWING. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS WITHIN 7 WORKING DAYS OF RECEIVING THE DRAWINGS. PRIOR TO PROCUREMENT/EXECUTION OF WORKS
7. ALL DIMENSIONS SHOWN IN THIS PLAN ARE ONLY INDICATIVE , REFER SCHEDULE OF JOINERY FOR DETAILS
8. FOR SLAB CUTOUT DETAILS REFER STRUCTURAL DRAWING.
9. PLEASE CHECK THE RESPECTIVE SANCTION PLANS BEFORE COMMENCEMENT OF WORK.

T.O.W. -TOP OF WALL/COLUMN/PORTAL
T.O.S. -TOP OF SLAB
T.O.P. -TOP OF PEDESTAL/PLANTER/SEAT
T.O.T. -TOP OF TRELLIS/PERGOLA
T.O.R. -TOP OF RAILING
F.F.L. -FINISHED FLOOR LEVEL
F.G.L. -FINISHED GRADE FOR PLANTING SOIL
CB F.L. -CATCH BASIN FINISHED FLOOR LEVEL

ESTIMATE SUBMISSION

REV NO	DATE	DESCRIPTION	BY

REVISION SCHEDULE:

PROJECT:
EMAAR
GURUGRAM

CLIENT:
EMAAR
SECTOR 62, GURUGRAM

STRUCTURAL CONSULTANT:
TPC TECHNICAL PROJECTS CONSULTANTS PVT. LTD
NOIDA 201301, INDIA

MEP CONSULTANT:
AEON
A-122, 6TH FLOOR, SECTOR 136, NOIDA, 201 305, INDIA

LANDSCAPE CONSULTANT:
ORACLES LANDSCAPE
G-98, GROUND FLOOR, KALKAJI, NEW DELHI, DELHI 110019

ARCHITECT:
DSP DESIGN ASSOCIATES PVT. LTD.
6th FLOOR, DEVCHAND HOUSE, SHIVSAGER ESTATE, Dr. ANNIE BESANT ROAD, OPP. NEHRU CENTRE, WORLI,MUMBAI - 400 018,TEL: +91 22 4915 1800.
• MUMBAI • BENGALURU • PUNE • DELHI • HYDERBAD

DRAWING NO: EMD-62/AEON/EL-001
REV NO: R0

TITLE:
SITE PLAN
SEWER LAYOUT

JOB NO:
DMI20220454

DATE	SCALE	DRAWN BY	CHECKED	APPROVED
03-06-2023	1 : 550	S.K	R.K	R.S

RELEASED FOR: ☐ SCHEMATIC DESIGN ☐ TENDER ☐ INFORMATION ■ APPROVAL ☐ CONSTRUCTION

THIS DRAWING IS THE SOLE PROPERTY OF DSP DESIGN ASSOCIATES PVT. LTD. USE OF THIS DRAWING FOR ANY PURPOSE OTHER THAN THAT MENTIONED TO BE DONE ONLY AFTER THEIR PRIOR APPROVAL.

01