TOWER PLANS_100

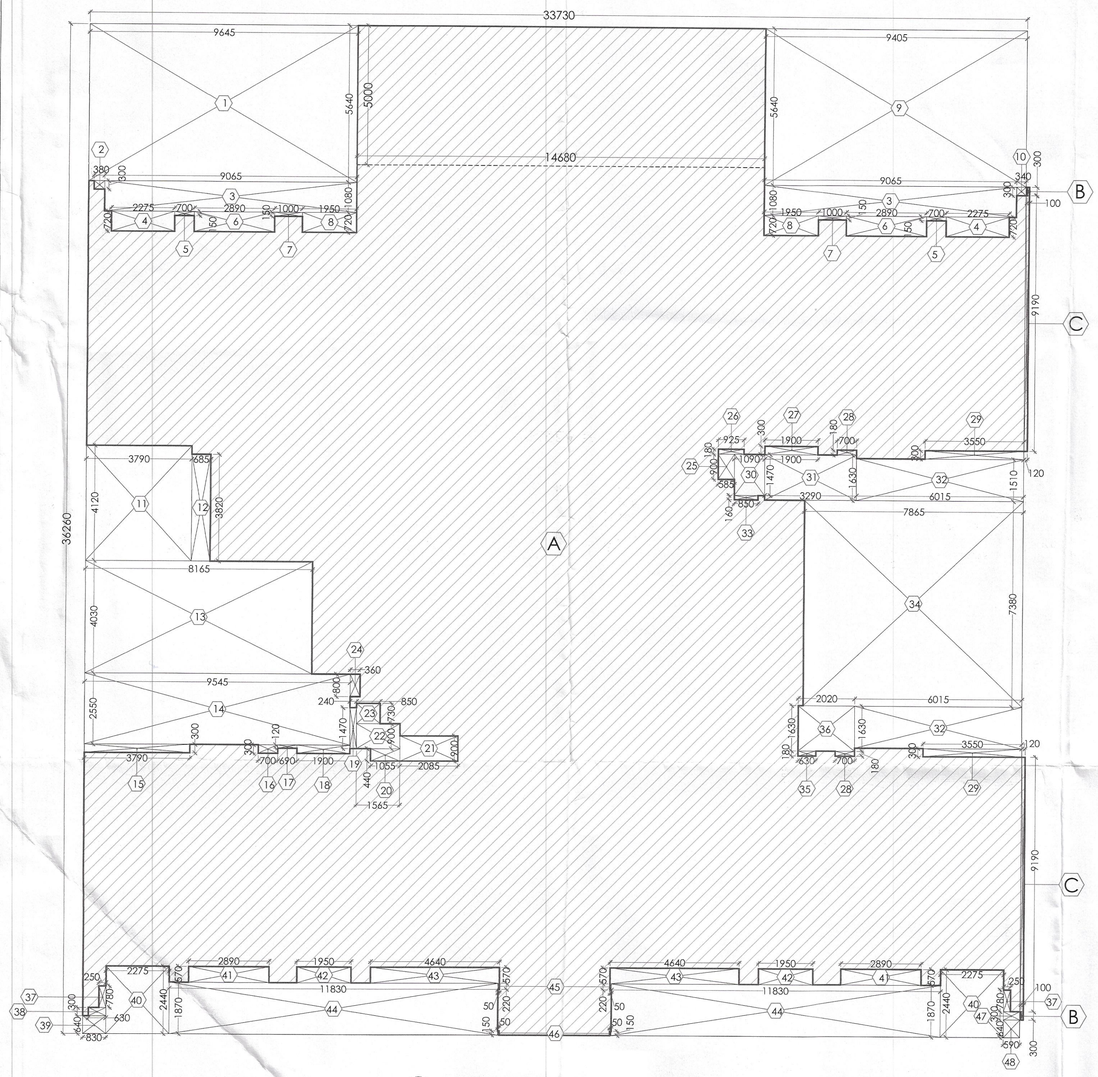

01 GROUND COVERAGE AREA DIAGRAM (TOWER B2)
SCALE - 1:100

This is a "PROVISIONAL BUILDING PLAN" approved only for the purpose of inviting objections from the general public

DDT (HQ) Member BPAC

S.T.P. (HQ) Member B.P.A.C. | S.T.P (HQ) Member Secretary B.P.A.C. | S.T.P (G) Member B.P.A.C. | (HQ) Chairman B.P.A.C.

AD | PA | ATP

Consultant Architect

ATP(HQ)

TO BE READ WITH THIS OFFICE MEMO NO.:
DATED :

Varinder Kumar AD(HQ)

GROUND COVERAGE - TOWER B2				
S.NO.	WIDTH (M)	LENGTH(M)	NOS.	AREA (SqM)
ADDITIONS				
A	33.730	36.260	1	1223.050
B	0.100	0.300	2	0.060
C	0.120	9.150	2	2.196
		TOTAL ADDITIONS		1225.306
SUBTRACTIONS				
1	9.645	5.640	1	54.398
2	0.380	0.300	1	0.114
3	9.065	1.080	2	19.580
4	2.275	0.720	2	3.276
5	0.700	0.150	2	0.210
6	2.890	0.720	2	4.162
7	1.000	0.150	2	0.300
8	1.950	0.720	2	2.808
9	9.405	5.640	1	53.044
10	0.340	0.300	1	0.102
11	3.790	4.120	1	15.615
12	0.685	3.820	1	2.617
13	8.165	4.030	1	32.905
14	9.545	2.550	1	24.340
15	3.790	0.300	1	1.137
16	0.700	0.300	1	0.210
17	0.690	0.120	1	0.083
18	1.900	0.300	1	0.570
19	0.240	1.470	1	0.353
20	1.055	0.440	1	0.464
21	2.085	0.900	1	1.877
22	1.565	0.900	1	1.409
23	0.850	0.730	1	0.621
24	0.360	0.800	1	0.288
25	0.585	0.900	1	0.527
26	0.925	0.180	1	0.167
27	1.900	0.300	1	0.570
28	0.700	0.180	2	0.252
29	3.550	0.300	2	2.130
30	1.090	1.470	1	1.602
31	3.290	1.630	1	5.363
32	6.015	1.510	2	18.165
33	0.850	0.160	1	0.136
34	7.865	7.380	1	58.044
35	0.630	0.180	1	0.113
36	2.020	1.630	1	3.293
37	0.780	0.250	2	0.390
38	0.630	0.300	1	0.189
39	0.830	0.640	1	0.531
40	2.275	2.440	2	11.102
41	2.890	0.570	2	3.295
42	1.950	0.570	2	2.223
43	4.640	0.570	2	5.290
44	11.830	1.870	2	44.244
45	0.050	0.220	2	0.022
46	0.050	0.150	2	0.015
47	0.590	0.300	1	0.177
48	0.590	0.640	1	0.378
		TOTAL SUBTRACTIONS		378.697
TOTAL GROUND COVERAGE AREA OF B2				846.609

NOTES:
REFER DRAWING NO. AR-B-201,202 &203 FOR ELEVATIONS
REFER DRAWING NO. AR-B-301 FOR SECTIONS
ALL TOILETS TO BE MECHANICALLY VENTILATED



KEY PLAN

NOTES

DOOR/ WINDOW SCHEDULE (TOWER5)							
S. NO.	DOOR TAGS	WIDTH	LINTEL	CILL	LOCATION	FIRE RATINGS	
DOORS							
1	D2	1050	2400	0	Bedroom		
2	D3	900	2400	0	Kitchen/Study /S. Room		
3	D4	800	2400	0	Toilet		
4	D6	1200	2400	0	GF - H.Toilet		
5	D8	750	2400	0	S. Toilet		
6	D9	1250	2400	0	GF & Terrace-Staircase		
7	GD1	1800	2400	0	GF Lobby entry from still		
EXTERNAL DOORS							
8	SD1	2250	2400	0	M. Bedroom		
9	SD2	2150	2400	0	Bedroom 2		
10	SD3	1450	2400	0	Bedroom 1		
11	SD3a	1500	2400	0	Bedroom 1		
12	SD4	2750	2400	0	Living/Dining		
13	SD5	2590	2400	0	Living/Dining		
14	SD6	1900	2400	0	Study		
15	SD7	4740	2400	0	Living/Dining		
16	D5	750	2400	0	Servant Toilet		
17	D7	900	2400	0	Kitchen/S. Room		
18	DW1	900/350	2400	0/1200	Kitchen		
19	DW2	900/310	2400	0/1200	S. Room/Study		
20	DW3	1200/1380	2400	0/1200	Machine Room		
WINDOWS							
21	V1	700	2400	1200	Toilet		
22	V2	600	2400	1200	Toilet		
23	W4	1250	2400	1200	Staircase		
24	W5	600	2250	1200	Staircase		
25	W6	900	2400	1200	M. Bedroom		
26	GL1	2140/1635	2400	0	Study		
27	GL2	1790/17600/1190	5900	0	GF Lobby		
28	GL3	6215	5900	0	GF Lobby		
29	GL4	6215	5900	0	GF Lobby		
30	GL5	1090/11565/2565	2100	0	Podium Lobby		
31	GL6	4680/2000/2000	5900	0	GF Lobby		
32	GL7	7210	5900	0	GF Lobby		
33	GL8	7210	5900	0	GF Lobby		
34	GL9	1055/1210	5900	0	GF Lobby		
35	GL10	1000/7100/410	5150	0	Podium Lobby		
36	GL11	2375/7100/1155	5150	0	Podium Lobby		
37	GL12	5275	5900	0	GF Lobby		
38	GL13	1450/1985/3840	5900	0	GF Lobby		
39	GL14	1440	5900	0	GF Lobby		
40	GL15	2500	5900	0	GF Lobby		
41	GL16	1300	5150	0	Podium Lobby		
42	GL17	2600	5150	0	Podium Lobby		
43	GL18	6190	5150	0	Podium Lobby		
44	GL19	5345	2400	0	GF Lobby		
45	GL20	1590	2400	0	GF Lobby		
46	GL21	3440/1620	2400	0	Study/S.Room		
47	GL22	3885/1910	2400	0	Study/S.Room		
48	GL23	1090/11565/2565	2500	0	GF Lobby		
49	GL24	3240	3300	0	GF Lobby		
50	GL25	1755/5985/1735	5150	0	Podium Lobby		
51	GL26	1725/2670	5900	0	GF Lobby		
52	GL27	900	9100	0	GF Lobby		
53	GL28	1800	9100	0	GF Lobby		
FIRE DOORS AND VENTILATOR							
54	FD1	1250	2400	0	Entrance Door	1hr	
55	FD2	1250	2400	0	Staircase/Fire Lobby	2hrs	
56	FD3	1200	2400	100	M.V Shaft	2hrs	
57	FD4	600	2400	100	LV Shaft	2hrs	
58	FD5	900	2400	0	Utility	1hr	
59	FD6	900	2400	100	M.V Shaft	2hrs	
60	FD7	1250	2400	0	Terrace-Electrical room	2hrs	
61	FD8	1250	2300	0	Staircase/Fire Lobby	2hrs	
62	FD9	1200	2400	0	Fire Control Room	2hrs	
63	FV1	700	2400	1200	Toilet	2hrs	
64	FHD1	900	2400	100	FHC Shaft		
65	FHD2	1750	2400	100	FHC Shaft		

CLIENTS

PURI

PURI CONSTRUCTION PVT. LTD.
4-7B, GROUND FLOOR,
TOLSTOY HOUSE
TOLSTOY MARG,
NEW DELHI-110001

STRUCTURES
TPC
Technical Projects Consultants Pvt. Ltd.
B-74 | Sector 57 | Noida 201301 | Uttar Pradesh | India
T: +91-120-4306800 | D: +91-120-4306806 |
M: +91-9910285917
www.tpconsultants.co.in

ARCHITECT'S
Arcop Associates Pvt. Ltd.
Plot- 368, Sec-32, Gurgaon-122001
Ph.: 26242050, 26242152
Montreal, Toronto, New-Delhi, Boston

PROJECT
Building plan of Phase-B, Under (TOD and TDR) policy area measuring 5.56175 Acres License no 87 of 2012 dated 29-08-2012 (4.268 Acres) & License no 33 of 2013 dated 25-05-2013 (1.29375 Acres) part of 21.01875 Acres License No. 55 of 2010 dated 25-07-2010 (15.457 Acres)., License no 87 of 2012 dated 29-08-2012 (4.268 Acres) & License no 33 of 2013 dated 25-05-2013 (1.29375 Acres) in Sector-110A & 111, Gurugram being developed by M/s Puri Construction Pvt. Ltd.

ARCHITECT'S SIGNATURE

Council of Architecture Registration No. CA/2001/28681 REGISTERED ARCHITECT

OWNER'S SIGNATURE
For PURI CONSTRUCTION PVT. LTD.
Authorised Signatory

DRAWING TITLE
GROUP HOUSING COLONY [TOWER-B2]
GROUND COVRAGE AREA CALCULATIONS

DRAWING NO.
AR-B2-101.1

A1 (841 X 594)