

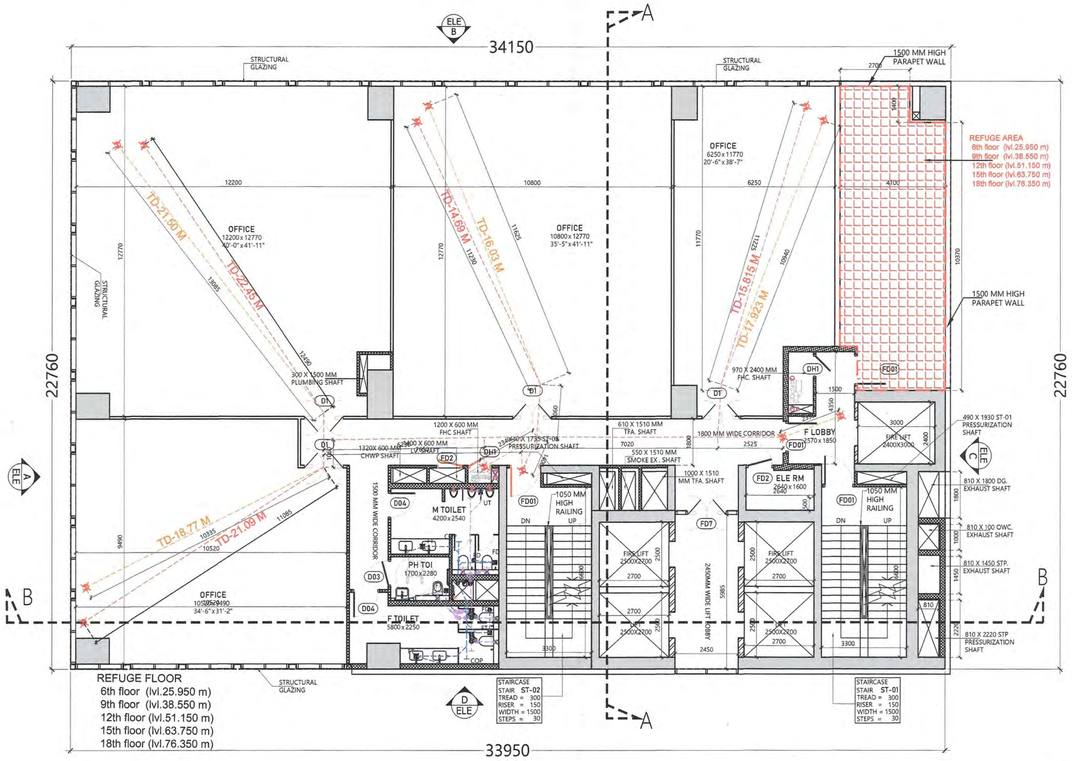


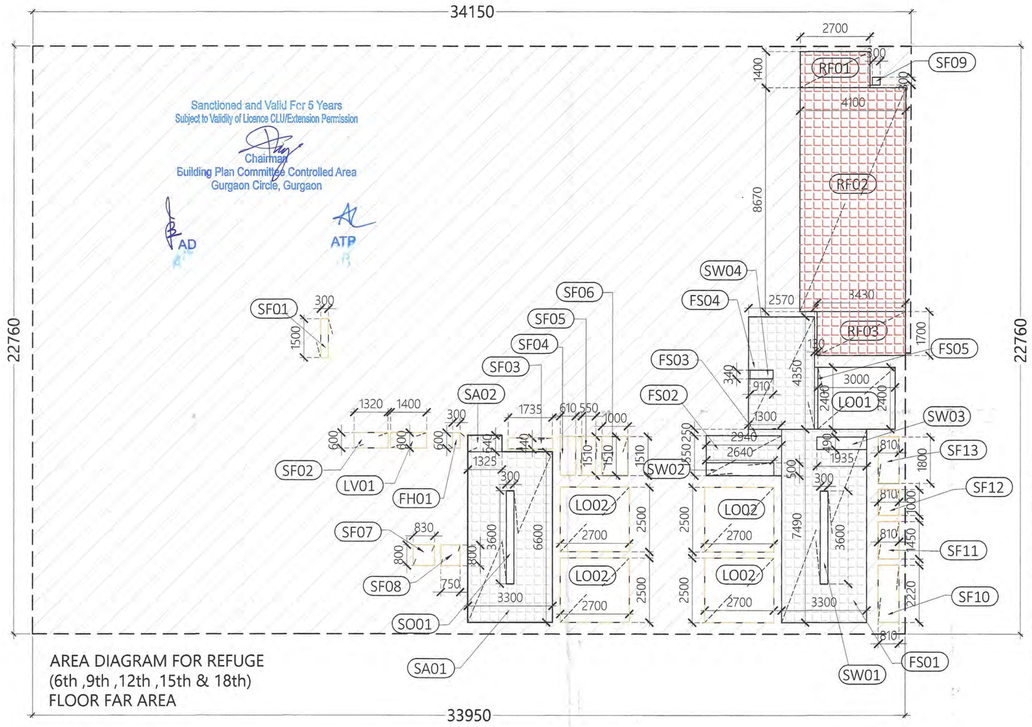

AREA DIAGRAM FOR REFUGE (6th ,9th ,12th ,15th & 18th) FLOOR FAR AREA

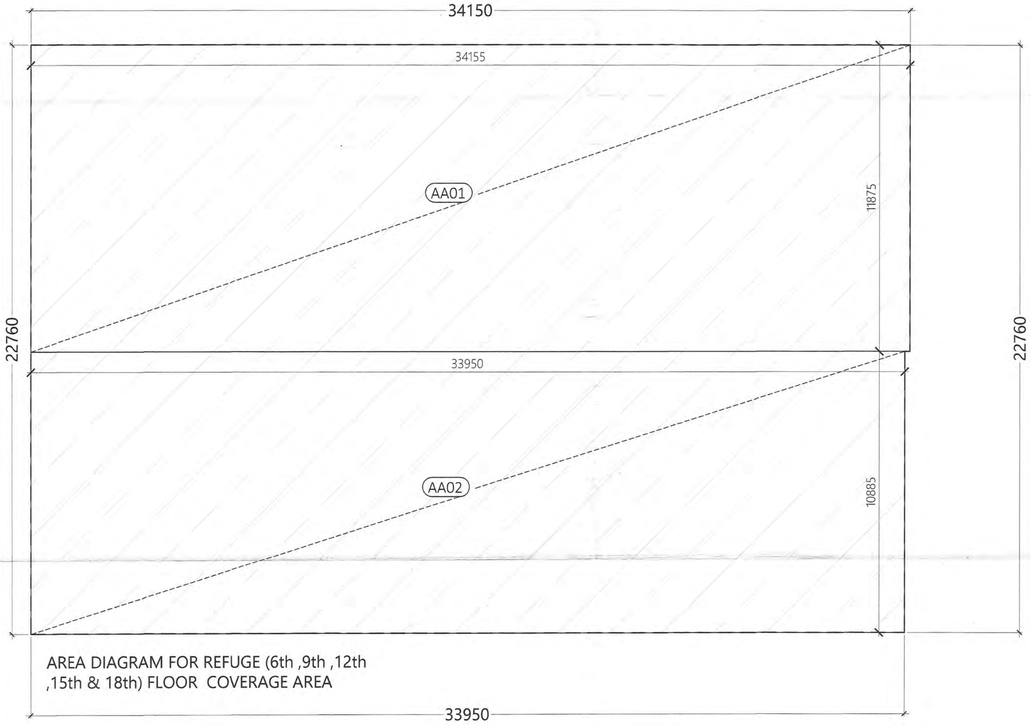

AREA DIAGRAM FOR REFUGE (6th ,9th ,12th ,15th & 18th) FLOOR COVERAGE AREA

NOTE:
REFUGE FLOOR
6th floor (lvl.25.950 m)
9th floor (lvl.38.550 m)
12th floor (lvl.51.150 m)
15th floor (lvl.63.750 m)
18th floor (lvl.76.350 m)

* [AREA(COV.) AT 7TH + 8TH FLOOR / 10] X 0.3 + 0.9

0.3 = AREA / PERSON
0.9 = AREA FOR WHEEL CHAIR BOUND

[723.21+ 723.21 / 10] X 0.3 + 0.9 = 44.29 SQM

PROPOSED REFUGE AREA (A)= 45.16 SQM

REQUIRED REFUGE AREA (B) = 44.29 SQM

TOTAL EXTRA AREA (A-B) TO BE ADDED IN MAIN FAR

(PROPOSED REFUGE AREA - REQUIRED REFUGE AREA = TOTAL EXTRA AREA TO BE ADDED IN MAIN FAR)

(45.16-44.29) =0.87 SQM FAR. PER FLOOR

6,9,12,15 & 18TH FLOOR REFUGE NON FAR AREA

ID	X (m)	x	Y (m)	x	Multipli er	x	Count (nos)	=	Area (sqm)
A. COVERED AREA									
RF01	2.700		1.400		1.0		1	=	3.78
RF02	4.100		8.670		1.0		1	=	35.55
RF03	3.430		1.700		1.0		1	=	5.83
TOTAL AREA "A"									45.16
B. AREA SUBTRACTION									
TOTAL AREA "B"									0.00
NET AREA "A-B" 6,9,12,15 & 18TH FLOOR, REFUGE NON FAR AREA									45.16

6,9,12,15 & 18TH FLOOR FIRE STAIRCASE NON FAR

ID	X (m)	x	Y (m)	x	Multipli er	x	Count (nos)	=	Area (sqm)
A. COVERED AREA									
FS01	3.300		7.490		1.0		1	=	24.72
FS02	2.940		1.550		1.0		1	=	4.56
FS03	1.300		0.250		1.0		1	=	0.33
FS04	2.570		4.350		1.0		1	=	11.18
FS05	0.130		2.400		1.0		1	=	0.31
TOTAL AREA "A"									41.09
B. AREA SUBTRACTION									
SW01	0.300		3.600		1.0		1	=	1.08
SW02	2.640		0.500		1.0		1	=	1.32
SW03	1.935		0.490		1.0		1	=	0.95
SW04	0.910		0.340		1.0		1	=	0.31
TOTAL AREA "B"									3.66
NET AREA "A-B" 6,9,12,15 & 18TH FLOOR, FIRE STAIRCASE NON FAR									37.43

6,9,12,15 & 18TH FLOOR COVERED AREA

ID	X (m)	x	Y (m)	x	Multipli er	x	Count (nos)	=	Area (sqm)
A. COVERED AREA									
AA01	34.155		11.875		1.0		1	=	405.59
AA02	33.950		10.885		1.0		1	=	369.55
TOTAL AREA "A"									775.14
B. AREA SUBTRACTION									
FH01	0.300		0.600		1.0		1	=	0.18
LO01	3.000		2.400		1.0		1	=	7.20
LO02	2.700		2.500		1.0		4	=	27.00
LV01	1.400		0.600		1.0		1	=	0.84
SF01	0.300		1.500		1.0		1	=	0.45
SF02	1.320		0.600		1.0		1	=	0.79
SF03	1.735		0.440		1.0		1	=	0.76
SF04	0.610		1.510		1.0		1	=	0.92
SF05	0.550		1.510		1.0		1	=	0.83
SF06	1.000		1.510		1.0		1	=	1.51
SF07	0.830		0.800		1.0		1	=	0.66
SF08	0.750		0.800		1.0		1	=	0.60
SF09	0.300		0.300		1.0		1	=	0.09
SF10	0.810		2.220		1.0		1	=	1.80
SF11	0.810		1.450		1.0		1	=	1.17
SF12	0.810		1.000		1.0		1	=	0.81
SF13	0.810		1.800		1.0		1	=	1.46
SO01	0.300		3.600		1.0		1	=	1.08
SW01	0.300		3.600		1.0		1	=	1.08
SW02	2.640		0.500		1.0		1	=	1.32
SW03	1.935		0.490		1.0		1	=	0.95
SW04	0.910		0.340		1.0		1	=	0.31
TOTAL AREA "B"									51.82
NET AREA "A-B" 6,9,12,15 & 18TH FLOOR, COVERED AREA									723.32

6,9,12,15 & 18TH FLOOR MAIN STAIRCASE NON FAR

ID	X (m)	x	Y (m)	x	Multipli er	x	Count (nos)	=	Area (sqm)
A. COVERED AREA									
SA01	3.300		6.600		1.0		1	=	21.78
SA02	1.325		0.640		1.0		1	=	0.85
TOTAL AREA "A"									22.63
B. AREA SUBTRACTION									
SO01	0.300		3.600		1.0		1	=	1.08
TOTAL AREA "B"									1.08
NET AREA "A-B" 6,9,12,15 & 18TH FLOOR, MAIN STAIRCASE NON FAR									21.55

6,9,12,15 & 18TH FLOOR FAR AREA


ID	X (m)	x	Y (m)	x	Multipli er	x	Count (nos)	=	Area (sqm)
A. COVERED AREA									
AA01	34.155		11.875		1.0		1	=	405.59
AA02	33.950		10.885		1.0		1	=	369.55
TOTAL AREA "A"									775.14
B. AREA SUBTRACTION									
FH01	0.300		0.600		1.0		1	=	0.18
FS01	3.300		7.490		1.0		1	=	24.72
FS02	2.940		1.550		1.0		1	=	4.56
FS03	1.300		0.250		1.0		1	=	0.33
FS04	2.570		4.350		1.0		1	=	11.18
FS05	0.130		2.400		1.0		1	=	0.31
LO01	3.000		2.400		1.0		1	=	7.20
LO02	2.700		2.500		1.0		4	=	27.00
LV01	1.400		0.600		1.0		1	=	0.84
RF01	2.700		1.400		1.0		1	=	3.78
RF02	4.100		8.670		1.0		1	=	35.55
RF03	3.430		1.700		1.0		1	=	5.83
SA01	3.300		6.600		1.0		1	=	21.78
SA02	1.325		0.640		1.0		1	=	0.85
SF01	0.300		1.500		1.0		1	=	0.45
SF02	1.320		0.600		1.0		1	=	0.79
SF03	1.735		0.440		1.0		1	=	0.76
SF04	0.610		1.510		1.0		1	=	0.92
SF05	0.550		1.510		1.0		1	=	0.83
SF06	1.000		1.510		1.0		1	=	1.51
SF07	0.830		0.800		1.0		1	=	0.66
SF08	0.750		0.800		1.0		1	=	0.60
SF09	0.300		0.300		1.0		1	=	0.09
SF10	0.810		2.220		1.0		1	=	1.80
SF11	0.810		1.450		1.0		1	=	1.17
SF12	0.810		1.000		1.0		1	=	0.81
SF13	0.810		1.800		1.0		1	=	1.46
TOTAL AREA "B"									155.96
NET AREA "A-B" 6,9,12,15 & 18TH FLOOR, FAR									619.18

TOTAL REFUGE FLOOR FAR AREA =
TOTAL FLOOR FAR AREA +EXTRA REFUGE AREA
=619.178 + 0.87 = 620.05 SQM
TOTAL REFUGE FLOOR FAR AREA = 620.05 SQM

6TH,9TH,12TH,15TH & 18TH (REFUGE FLOOR) NON FAR AREA			
TYPE		AREA	SQMT
TOTAL FIRE STAIRCASE NON FAR AREA	=	37.433	SQMT
TOTAL REFUGE NON FAR AREA	=	45.158	SQMT
TOTAL MAIN STAIRCASE NON FAR AREA	=	21.548	SQMT
TOTAL NON FAR AREA AT REFUGE FLOOR	=	**104.139**	**SQMT**

6TH,9TH,12TH,15TH & 18TH (REFUGE FLOOR) FAR AREA			
TYPE		AREA	SQMT
REFUGE FLOOR FAR AREA	=	619.178	SQMT
EXTRA REFUGE AREA		0.870	SQMT
TOTAL REFUGE FLOOR FAR AREA	=	**620.048**	**SQMT**

6TH,9TH,12TH,15TH & 18TH (REFUGE FLOOR) BUILTUP AREA			
TYPE		AREA	SQMT
TOTAL REFUGE FLOOR FAR AREA	=	619.178	SQMT
TOTAL NON FAR AREA AT REFUGE FLOOR	=	104.139	SQMT
TOTAL BUILTUP AREA AT REFUGE FLOOR	=	**723.317**	**SQMT**

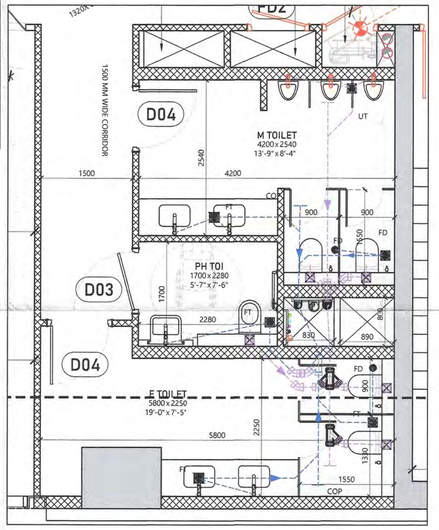

TOILET PLAN

NOTE:

1. MECHANICAL VENTILATION SHALL BE PROVIDED IN ALL TOILET AREAS, WITH THE SYSTEM CONNECTED TO 100% ELECTRICAL POWER BACKUP.
2. BUILDING IS CENTRALLY MECHANICAL VENTILATION WITH THE SYSTEM CONNECTED TO 100% ELECTRICAL POWER BACKUP.

OWNER SIGN — EMAAR INDIA LIMITED, Gurugram

ARCHITECT SIGN

AREA LEGEND

- FAR AREA
- COVERED AREA
- NON FAR AREA
- REFUGE AREA


SCHEDULE FOR DOOR WINDOW OPENINGS

TAG	WIDTH	HEIGHT	C/LL	LINTEL	LOCATION	REMARKS
GLASS DOORS / DOORS						
DH1	2550	2400	0	2400	GUARD ROOM	ALDOOR
DH1	900	2300	100	2400	PHC. SHAFT	MS. FRAME
DH2	750	2300	100	2400	PL. SHAFT	
D1	1500	2400	0	+2400	OFFICE	
D2	1200	2400	0	+2400	CORRIDOR, STAIRCASE	
D3	1050	2400	0	+2400	PH TOILET	WOODEN FRAME
D4	1050	2400	0	+2400	TOILET/MAIN DOOR	
D5	800	2400	0	+2400	LOBBY	
D6	1650	2400	0	+2400	CORRIDOR	
D7	1000	2400	0	+2400	STORE	
SERVICE/ FIRE DOORS						
FD1	1200	2400	0	2400	STAIRCASE FAN ROOM, MUX. FACILITY MANAGER, UPS, BATTERY, LT PANEL	2HOUR FIRE RATED DOOR
FD2	1050	2300	+100	2400	LV. SHAFT, ELEC ROOM	
FD3	750	2300	+100	2400	ELECTRICAL ROOM	
FD4	1550	2400	+0	2400	OFFICE	
FD5	1000	2400	+100	2300	ELEC PANEL ROOM	
FD6	1650	2400	+0	2400	ELEC PANEL ROOM	
FD7	1500	2400	+0	2400	CORRIDOR, LIFT LOBBY	
FD8	2000	2400	+0	2400	LT PANEL RM	
FD9	2400	2400	+0	2400	FIRE PUMP ROOM	
ROLLING SHUTTER						
RS1	2000	3000	+0	3000	RMU ROOM	
RS2	3000	3000	+0	3000	1B-1, 1B-2	2HOUR RERATED DOOR

OWNER
M/S EMAAR INDIA LIMITED

SUBMISSION DRAWING

KEYPLAN



PROJECT NAME
EMAAR SOUK 65

PROJECT ADDRESS
PROPOSED BUILDING PLAN OF COMMERCIAL-2 OF AREA MEASURING 1.548 ACRES IN RESIDENTIAL PLOTTED COLONY ON AREA MEASURING 98.194 ACRES (LICENSE NO 97OF 2010 DT.18.11.2010, LICENSE NO.41 OF 2011 DT.03.05.2011, LICENSE NO. 101 OF 2023 DT.06.05.2023 & LICENSE NO. 265 OF 2025 DT . 31.12.2025) IN SECTOR - 66 & 65 , GURUGRAM BEING DEVELOPED BY ACTIVE PROMOTERS AND OTHERS IN COLLABORATION WITH EMAAR INDIA LTD (FORMERLY KNOWN AS EMAAR MGF LAND LTD)

DATE	PROJECT INCH.	CHECKED BY
13 - 09 -2026	PALIN SIKARI	BALRAJ SINGH
SCALE	DEALT BY	APPROVED BY
1:100	DHEERAJ CHAND	VINEETA P SINGHANIA

DRAWING TITLE
6TH,9TH,12TH,15TH & 18TH REFUGE PLAN & AREA CALCULATION

ARCHITECTS

Confluence
NEW DELHI , INDIA

F-1, FIRST FLOOR, MIRA CORPORATE SUITES, ISHWAR NAGAR, NEW DELHI 110065

Ph- +91-11-26925684 ccs@inconfluence.com
Ph- +91-11-40564768 www.inconfluence.com
Member of IGBC ISO - 9001 : 2000
architecture urban design hospitality interiors

DRAWING NO. S-20

REVISION