
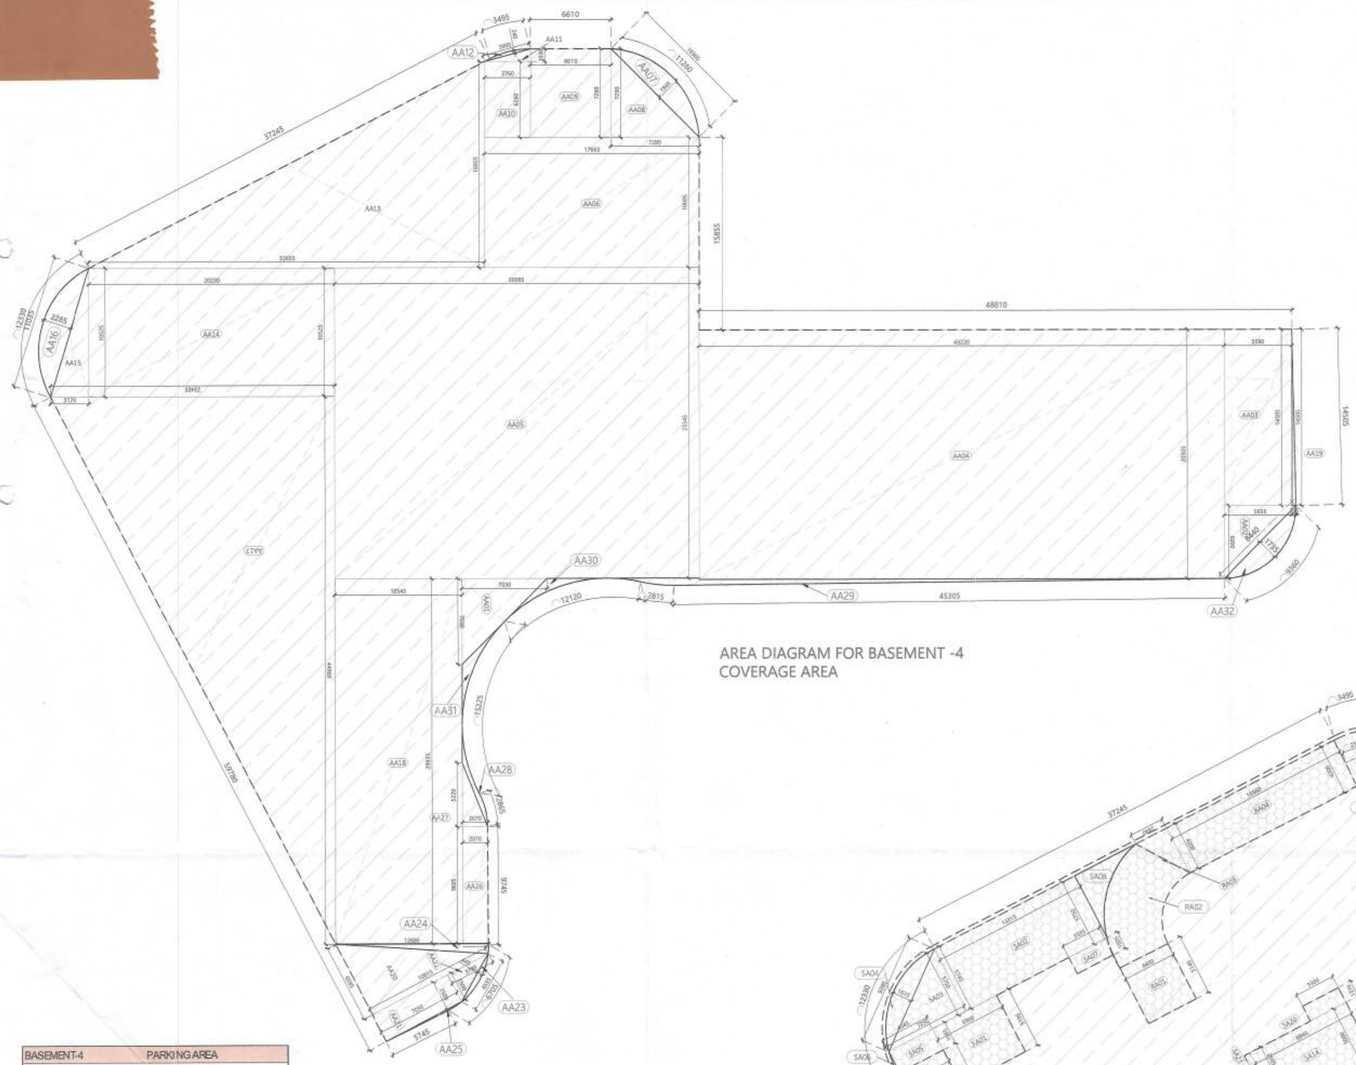


AREA DIAGRAM FOR BASEMENT -4
COVERAGE AREA

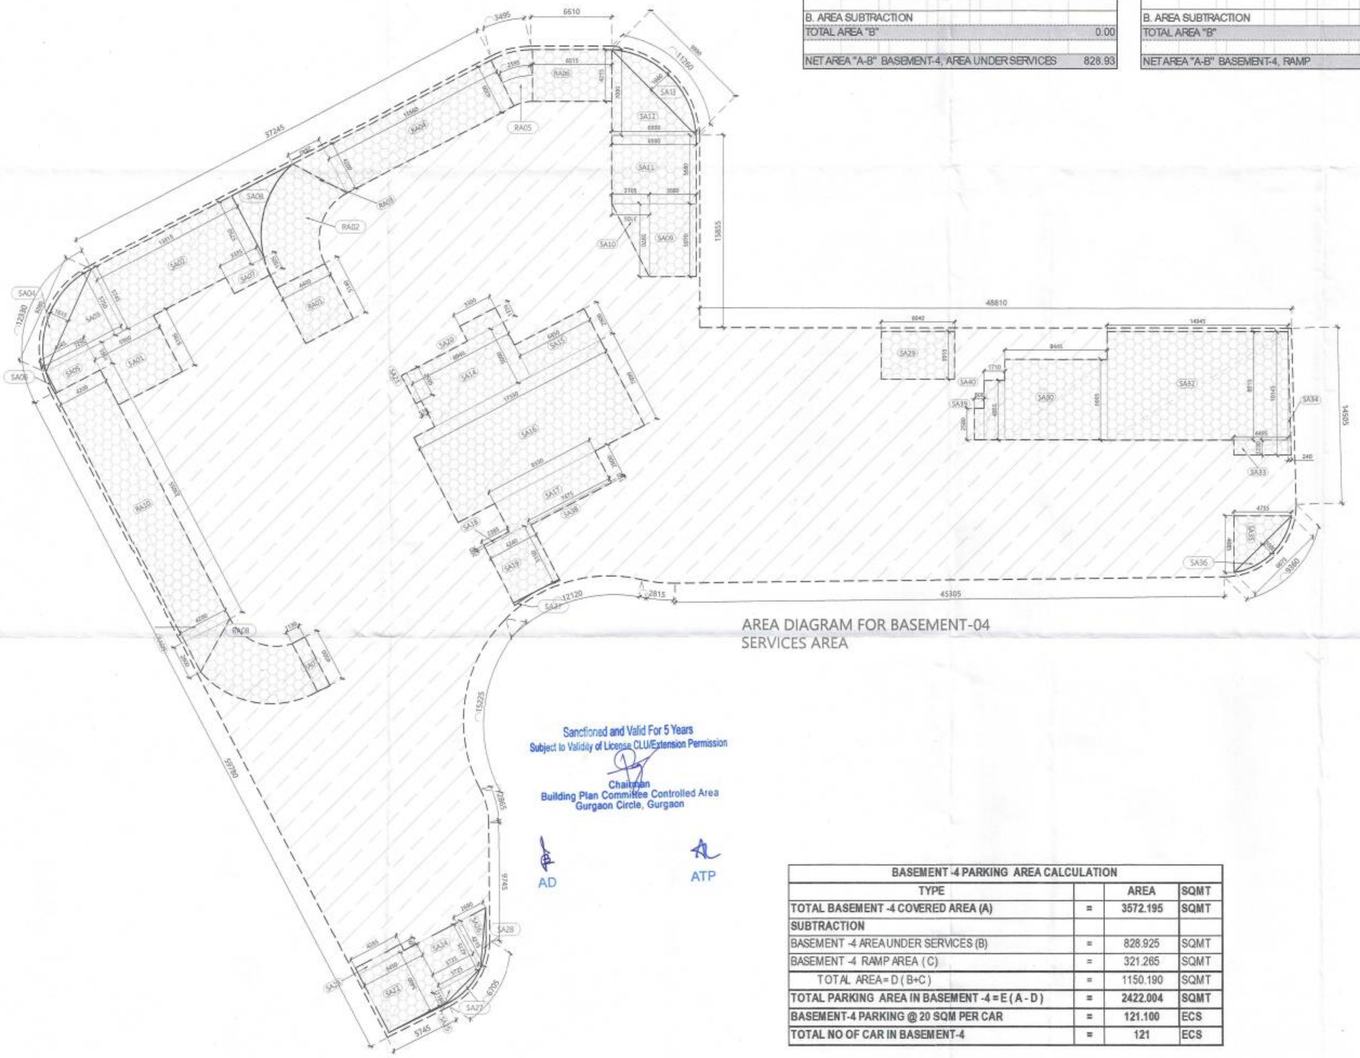

AREA DIAGRAM FOR BASEMENT-04
SERVICES AREA

BASEMENT-4	COVERED AREA					
ID	X (m)	x Y (m)	x Multiplier	Count (nos)	=	Area (sqm)
A. COVERED AREA						
AA01	7.030	7.030	0.5	1	=	24.71
AA02	6.000	5.935	0.5	1	=	17.81
AA03	5.590	14.505	1.0	1	=	81.08
AA04	43.220	20.505	1.0	1	=	886.23
AA05	30.085	25.545	1.0	1	=	768.52
AA06	17.665	10.695	1.0	1	=	188.93
AA07	1.000	1.000	13.7	1	=	13.73
AA08	7.290	7.290	0.5	1	=	26.57
AA09	6.610	7.290	1.0	1	=	48.19
AA10	3.760	6.260	1.0	1	=	23.54
AA11	3.760	1.030	0.5	1	=	1.94
AA12	1.000	1.000	0.7	1	=	0.66
AA13	32.655	16.955	0.5	1	=	276.83
AA14	20.230	10.525	1.0	1	=	212.92
AA15	3.170	10.525	0.5	1	=	16.68
AA16	1.000	1.000	17.9	1	=	17.91
AA17	23.405	44.960	0.5	1	=	526.14
AA18	10.545	29.935	1.0	1	=	315.66
AA19	0.345	14.505	0.5	1	=	2.50
AA20	6.595	10.815	0.5	1	=	35.66
AA21	2.500	7.035	1.0	1	=	17.59
AA22	2.500	3.780	0.5	1	=	4.73
AA23	1.000	1.000	1.4	1	=	1.35
AA24	1.000	1.000	5.4	1	=	5.42
AA25	1.000	1.000	0.4	1	=	0.43
AA26	2.070	9.605	1.0	1	=	19.88
AA27	2.070	5.220	0.5	1	=	5.40
AA28	1.000	1.000	2.2	1	=	2.17
AA29	1.000	1.000	12.8	1	=	12.76
AA30	1.000	1.000	3.1	1	=	3.08
AA31	1.000	1.000	3.1	1	=	3.09
AA32	1.000	1.000	10.1	1	=	10.08
TOTAL AREA "A"						3,572.19
B. AREA SUBTRACTION						
TOTAL AREA "B"						0.00
NET AREA "A-B" BASEMENT-4, COVERED AREA						3,572.19

BASEMENT-4	AREA UNDER SERVICES					
ID	X (m)	x Y (m)	x Multiplier	Count (nos)	=	Area (sqm)
A. COVERED AREA						
SA01	5.900	5.195	1.0	1	=	30.65
SA02	13.015	5.750	1.0	1	=	74.84
SA03	7.290	5.750	0.5	1	=	20.96
SA04	1.000	1.000	10.3	1	=	10.30
SA05	4.200	1.960	1.0	1	=	8.23
SA06	1.000	1.000	0.2	1	=	0.24
SA07	3.335	1.505	1.0	1	=	5.02
SA08	1.000	1.000	10.1	1	=	10.07
SA09	3.880	5.970	1.0	1	=	23.16
SA10	3.105	5.970	0.5	1	=	9.27
SA11	6.990	5.680	1.0	1	=	39.70
SA12	6.990	7.000	0.5	1	=	24.47
SA13	1.000	1.000	12.6	1	=	12.59
SA14	8.940	5.000	1.0	1	=	44.70
SA15	6.450	2.900	1.0	1	=	18.71
SA16	17.330	7.890	1.0	1	=	136.73
SA17	9.330	2.800	1.0	1	=	26.12
SA18	2.385	0.200	1.0	1	=	0.48
SA19	4.240	5.150	1.0	1	=	21.84
SA20	3.300	1.370	1.0	1	=	4.52
SA21	2.595	0.510	1.0	1	=	1.32
SA22	5.450	5.400	1.0	1	=	29.43
SA23	4.265	0.600	1.0	1	=	2.56
SA24	3.725	4.215	1.0	1	=	15.70
SA25	1.180	3.725	0.5	1	=	2.20
SA26	4.215	2.690	0.5	1	=	5.67
SA27	1.000	1.000	1.4	1	=	1.43
SA28	1.000	1.000	0.8	1	=	0.83
SA29	6.040	3.915	1.0	1	=	23.65
SA30	8.445	6.605	1.0	1	=	55.78
SA32	14.945	8.915	1.0	1	=	133.23
SA33	4.495	1.230	1.0	1	=	5.53
SA34	0.240	10.145	0.5	1	=	1.22
SA35	4.685	4.755	0.5	1	=	11.14
SA36	1.000	1.000	4.9	1	=	4.90
SA37	1.000	1.000	0.3	1	=	0.26
SA38	7.475	0.150	1.0	1	=	1.12
SA39	2.580	0.800	1.0	1	=	2.06
SA40	1.710	4.855	1.0	1	=	8.30
TOTAL AREA "A"						828.93
B. AREA SUBTRACTION						
TOTAL AREA "B"						0.00
NET AREA "A-B" BASEMENT-4, AREA UNDER SERVICES						828.93

BASEMENT-4	RAMP					
ID	X (m)	x Y (m)	x Multiplier	Count (nos)	=	Area (sqm)
A. COVERED AREA						
RA01	4.400	5.140	1.0	1	=	22.62
RA02	1.000	1.000	42.3	1	=	42.26
RA03	2.840	4.200	0.5	1	=	5.96
RA04	15.560	4.200	1.0	1	=	65.35
RA05	1.000	1.000	10.9	1	=	10.91
RA06	6.515	4.215	1.0	1	=	27.46
RA07	1.130	4.500	1.0	1	=	5.09
RA08	1.000	1.000	38.9	1	=	38.91
RA09	2.800	4.200	0.5	1	=	5.88
RA10	4.200	23.055	1.0	1	=	96.83
TOTAL AREA "A"						321.26
B. AREA SUBTRACTION						
TOTAL AREA "B"						0.00
NET AREA "A-B" BASEMENT-4, RAMP						321.26

BASEMENT-4	PARKING AREA					
ID	X (m)	x Y (m)	x Multiplier	Count (nos)	=	Area (sqm)
A. COVERED AREA						
AA01	7.030	7.030	0.5	1	=	24.71
AA02	6.000	5.935	0.5	1	=	17.81
AA03	5.590	14.505	1.0	1	=	81.08
AA04	43.220	20.505	1.0	1	=	886.23
AA05	30.085	25.545	1.0	1	=	768.52
AA06	17.665	10.695	1.0	1	=	188.93
AA07	1.000	1.000	13.7	1	=	13.73
AA08	7.290	7.290	0.5	1	=	26.57
AA09	6.610	7.290	1.0	1	=	48.19
AA10	3.760	6.260	1.0	1	=	23.54
AA11	3.760	1.030	0.5	1	=	1.94
AA12	1.000	1.000	0.7	1	=	0.66
AA13	32.655	16.955	0.5	1	=	276.83
AA14	20.230	10.525	1.0	1	=	212.92
AA15	3.170	10.525	0.5	1	=	16.68
AA16	1.000	1.000	17.9	1	=	17.91
AA17	23.405	44.960	0.5	1	=	526.14
AA18	10.545	29.935	1.0	1	=	315.66
AA19	0.345	14.505	0.5	1	=	2.50
AA20	6.595	10.815	0.5	1	=	35.66
AA21	2.500	7.035	1.0	1	=	17.59
AA22	2.500	3.780	0.5	1	=	4.73
AA23	1.000	1.000	1.4	1	=	1.35
AA24	1.000	1.000	5.4	1	=	5.42
AA25	1.000	1.000	0.4	1	=	0.43
AA26	2.070	9.605	1.0	1	=	19.88
AA27	2.070	5.220	0.5	1	=	5.40
AA28	1.000	1.000	2.2	1	=	2.17
AA29	1.000	1.000	12.8	1	=	12.76
AA30	1.000	1.000	3.1	1	=	3.08
AA31	1.000	1.000	3.1	1	=	3.09
AA32	1.000	1.000	10.1	1	=	10.08
TOTAL AREA "A"						3,572.19
B. AREA SUBTRACTION						
RA01	4.400	5.140	1.0	1	=	22.62
RA02	1.000	1.000	42.3	1	=	42.26
RA03	2.840	4.200	0.5	1	=	5.96
RA04	15.560	4.200	1.0	1	=	65.35
RA05	1.000	1.000	10.9	1	=	10.91
RA06	6.515	4.215	1.0	1	=	27.46
RA07	1.130	4.500	1.0	1	=	5.09
RA08	1.000	1.000	38.9	1	=	38.91
RA09	2.800	4.200	0.5	1	=	5.88
RA10	4.200	23.055	1.0	1	=	96.83
SA01	5.900	5.195	1.0	1	=	30.65
SA02	13.015	5.750	1.0	1	=	74.84
SA03	7.290	5.750	0.5	1	=	20.96
SA04	1.000	1.000	10.3	1	=	10.30
SA05	4.200	1.960	1.0	1	=	8.23
SA06	1.000	1.000	0.2	1	=	0.24
SA07	3.335	1.505	1.0	1	=	5.02
SA08	1.000	1.000	10.1	1	=	10.07
SA09	3.880	5.970	1.0	1	=	23.16
SA10	3.105	5.970	0.5	1	=	9.27
SA11	6.990	5.680	1.0	1	=	39.70
SA12	6.990	7.000	0.5	1	=	24.47
SA13	1.000	1.000	12.6	1	=	12.59
SA14	8.940	5.000	1.0	1	=	44.70
SA15	6.450	2.900	1.0	1	=	18.71
SA16	17.330	7.890	1.0	1	=	136.73
SA17	9.330	2.800	1.0	1	=	26.12
SA18	2.385	0.200	1.0	1	=	0.48
SA19	4.240	5.150	1.0	1	=	21.84
SA20	3.300	1.370	1.0	1	=	4.52
SA21	2.595	0.510	1.0	1	=	1.32
SA22	5.450	5.400	1.0	1	=	29.43
SA23	4.265	0.600	1.0	1	=	2.56
SA24	3.725	4.215	1.0	1	=	15.70
SA25	1.180	3.725	0.5	1	=	2.20
SA26	4.215	2.690	0.5	1	=	5.67
SA27	1.000	1.000	1.4	1	=	1.43
SA28	1.000	1.000	0.8	1	=	0.83
SA29	6.040	3.915	1.0	1	=	23.65
SA30	8.445	6.605	1.0	1	=	55.78
SA32	14.945	8.915	1.0	1	=	133.23
SA33	4.495	1.230	1.0	1	=	5.53
SA34	0.240	10.145	0.5	1	=	1.22
SA35	4.685	4.755	0.5	1	=	11.14
SA36	1.000	1.000	4.9	1	=	4.90
SA37	1.000	1.000	0.3	1	=	0.26
SA38	7.475	0.150	1.0	1	=	1.12
SA39	2.580	0.800	1.0	1	=	2.06
SA40	1.710	4.855	1.0	1	=	8.30
TOTAL AREA "B"						1,150.19
NET AREA "A-B" BASEMENT-4, PARKING AREA						2,422.00

BASEMENT-4 PARKING AREA CALCULATION			
TYPE		AREA	SQMT
TOTAL BASEMENT -4 COVERED AREA (A)	=	3572.195	SQMT
SUBTRACTION			
BASEMENT -4 AREA UNDER SERVICES (B)	=	828.925	SQMT
BASEMENT -4 RAMP AREA (C)	=	321.265	SQMT
TOTAL AREA= D (B+C)	=	1150.190	SQMT
TOTAL PARKING AREA IN BASEMENT -4 = E (A - D)	=	2422.004	SQMT
BASEMENT-4 PARKING @ 20 SQM PER CAR	=	121.100	ECS
TOTAL NO OF CAR IN BASEMENT-4	=	121	ECS

Sanctioned and Valid For 5 Years
Subject to Validity of License CLU/Extension Permission
Chairman
Building Plan Committee Controlled Area
Gurgaon Circle, Gurgaon

AD ATP

OWNER SIGN

ARCHITECT SIGN

AREA LEGEND


COVERED AREA

NON FAR AREA

OWNER
M/S EMAAR INDIA LIMITED

SUBMISSION DRAWING

KEYPLAN



PROJECT NAME
EMAAR SOUK 65

PROJECT ADDRESS
PROPOSED BUILDING PLAN OF COMMERCIAL-2 OF AREA MEASURING 1.548 ACRES IN RESIDENTIAL PLOTTED COLONY ON AREA MEASURING 98.194 ACRES (LICENSE NO 97OF 2010 DT.18.11.2010, LICENSE NO.41 OF 2011 DT.03.05.2011, LICENSE NO. 101 OF 2023 DT.06.05.2023 & LICENSE NO. 265 OF 2025 DT . 31.12.2025) IN SECTOR - 66 & 65 , GURUGRAM BEING DEVELOPED BY ACTIVE PROMOTERS AND OTHERS IN COLLABORATION WITH EMAAR INDIA LTD (FORMERLY KNOWN AS EMAAR MGF LAND LTD)

DATE	PROJECT INCH.	CHECKED BY
13 - 09 -2026	PALIN SIKARI	BALRAJ SINGH
SCALE	DEALT BY	APPROVED BY
1:100	DHEERAJ CHAND	VINEETA P SINGHANIA

DRAWING TITLE
BASEMENT 4 LEVEL AREA CALCULATION

ARCHITECTS
Confluence
NEW DELHI , INDIA
F-1, FIRST FLOOR, MIRA CORPORATE SUITES, ISHWAR NAGAR, NEW DELHI 110065
Ph- +91-11-26925684 ccs@inconfluence.com
Ph- +91-11-40564766 www.inconfluence.com
architecture urban design hospitality
Member of IGBC
ISO - 9001 : 2000
interiors

DRAWING NO.
S-11

REVISION