MEZZANINE FLOOR (RESIDENTIAL) AREA CALCULATION											
GROSS – A											
1	1	X	8.280			X	21.775	=	180.297	SQM
2	0.5	X	8.275	+	5.645	X	2.850	=	19.836	SQM
							TOTAL	=	200.133	SQM
TOTAL GROUND COVERAGE OF MEZZANINE FLOOR (RESIDENTIAL)		=	GROSS-A	+	GROSS-B					
		=	200.133	+	1.788					
GROSS-1		=	201.921	SQM						

ARC AREA	ADDITIONAL ARC AREA CALCULATION																				
GROSS -B																					
3	3.14	X	3.110	X	3.110	X	77	/	360	-	0.5	X	3.110	-	0.880	X	3.875	=	1.788	SQM
																	TOTAL	=	1.788	SQM

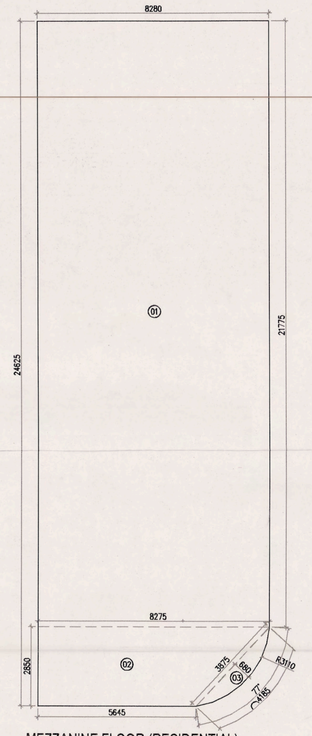

MEZZANINE FLOOR (RESIDENTIAL)
GROUND COVERAGE

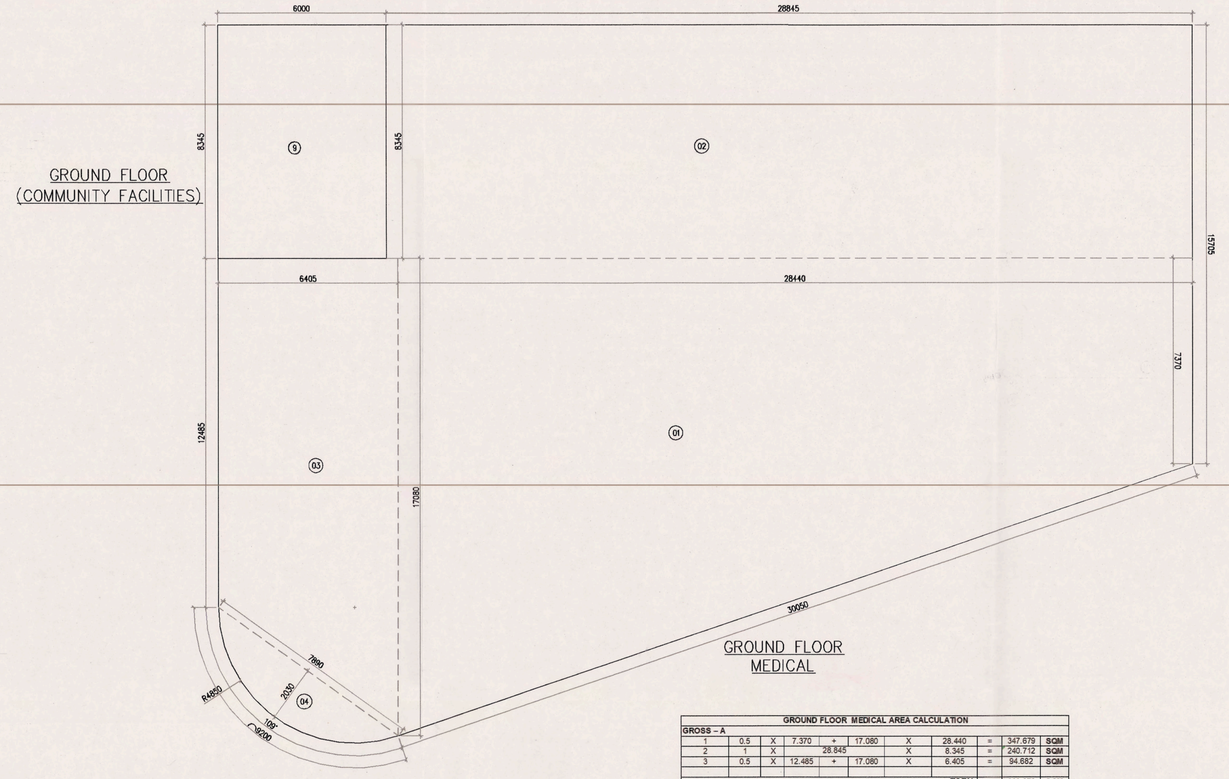

GROUND FLOOR
(COMMUNITY FACILITIES)

GROUND FLOOR
MEDICAL

GROUND FLOOR MEDICAL AREA CALCULATION											
GROSS – A											
1	0.5	X	7.370	+	17.080	X	26.440	=	347.879	SQM	
2	1	X	26.845			X	6.345	=	240.712	SQM	
3	0.5	X	12.485	+	17.080	X	6.405	=	94.682	SQM	
							TOTAL	=	683.072	SQM	
TOTAL GROUND COVERAGE OF GROUND FLOOR MEDICAL		=	GROSS-A	+	GROSS-B						
		=	683.072	+	11.238						
		=	694.311	SQM							

GROSS – B																				
4	3.14	X	4.850	X	4.850	X	108.00	/	360	-	0.5	X	4.850	-	2.030	X	7.890	=	11.238	SQM
																	TOTAL	=	11.238	SQM

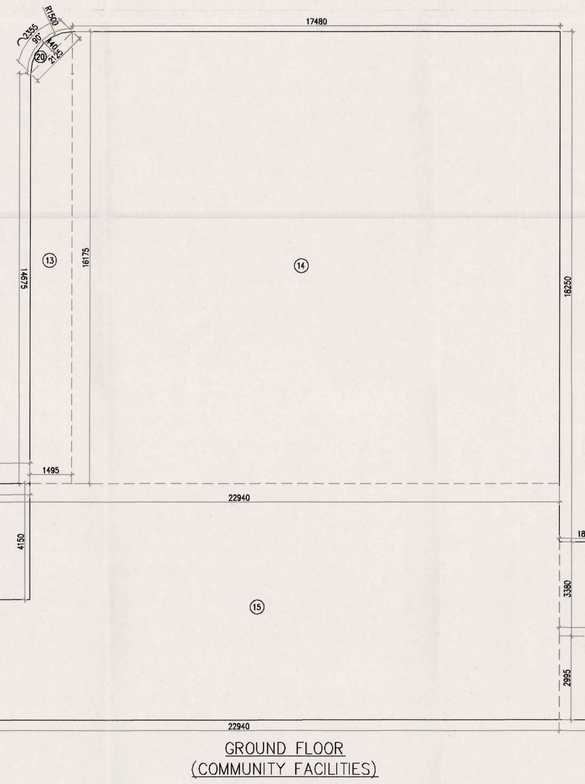

GROUND FLOOR
(COMMUNITY FACILITIES)

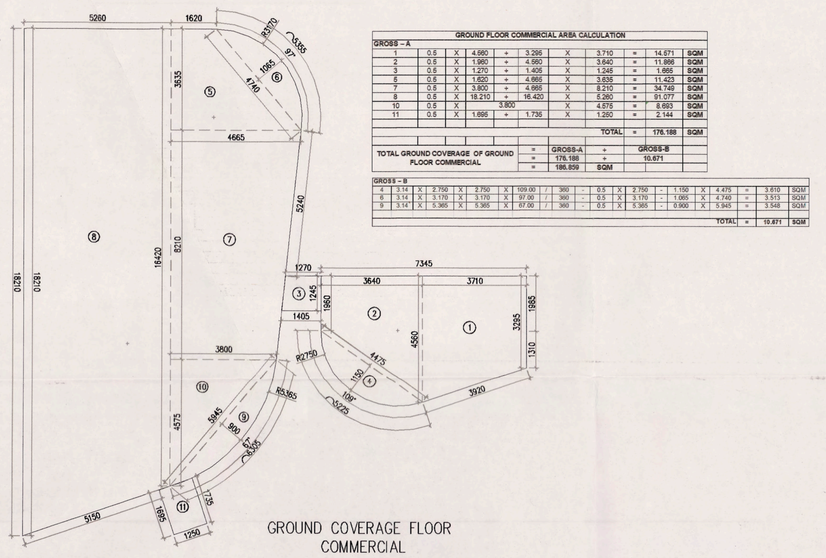

GROUND COVERAGE FLOOR
COMMERCIAL

GROUND FLOOR COMMERCIAL AREA CALCULATION																				
GROSS – A																				
1	0.5	X	4.660	+	3.295	X	3.710	=	14.671	SQM										
2	0.5	X	1.980	+	4.660	X	3.640	=	11.666	SQM										
3	0.5	X	1.270	+	1.405	X	1.345	=	1.666	SQM										
8	0.5	X	1.620	+	4.665	X	3.835	=	11.423	SQM										
9	0.5	X	18.210	+	1.620	X	8.280	=	81.077	SQM										
10	0.5	X	3.800			X	4.575	=	8.693	SQM										
11	0.5	X	1.666	+	1.735	X	1.260	=	2.144	SQM										
									TOTAL	=	176.188	SQM								
TOTAL GROUND COVERAGE OF GROUND FLOOR COMMERCIAL				=	GROSS-A	+	GROSS-B													
				=	176.188	-	15.671													
				=	186.859	SQM														

GROSS – B																								
5	3.14	X	2.750	X	2.750	X	108.00	/	360	-	0.5	X	2.750	-	1.100	X	4.475	=	3.810	SQM				
6	3.14	X	3.170	X	3.170	X	97.00	/	360	-	0.5	X	3.170	-	1.060	X	4.740	=	3.513	SQM				
7	3.14	X	5.380	X	1.380	X	67.00	/	360	-	0.5	X	5.380	-	0.980	X	1.845	=	1.748	SQM				
																	TOTAL	=	15.671	SQM				

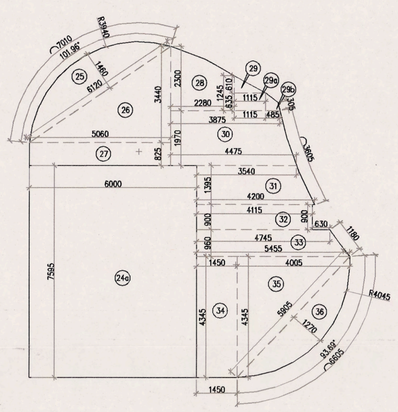
2400
1040
R1840
1460
6360
3440
3320
2280
5060
6000
7365
3540
4200
4115
4745
5455
4005
1450
1450
3875
4475
1115
1115
1115
480
1340
1340
1340