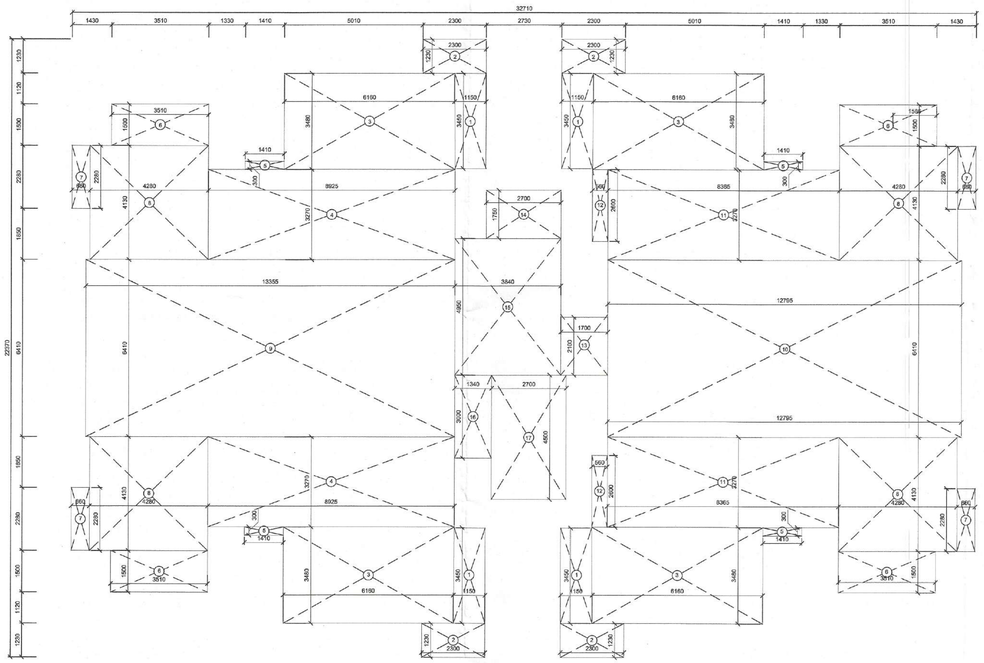

1 21st Floor Area - Tower 3 & 4

Carpet area / No. Of Dwelling Units TOWER 3 & 4				
S.N.	Floor	No. Of Units Of Type		No. of units per Floor
		2-A	2-B	
1	Stilt Floor	0	0	0
2	1st Floor	4	4	8
3	2nd Floor	4	4	8
4	3rd Floor	4	4	8
5	4th Floor	4	4	8
6	5th Floor	4	4	8
7	6th Floor	4	4	8
8	7th Floor	4	4	8
9	8th Floor	4	4	8
10	9th Floor	4	4	8
11	10th Floor	4	4	8
12	11th Floor	4	4	8
13	12th Floor	4	4	8
14	13th Floor	4	4	8
15	14th Floor	4	4	8
16	15th Floor	4	4	8
17	16th Floor	4	4	8
18	17th Floor	4	4	8
19	18th Floor	4	4	8
20	19th Floor	4	4	8
21	20th Floor	4	4	8
22	21st Floor	4	3	7
23	22nd Floor	4	4	8
24	23rd Floor	4	4	8
25	24th Floor	4	4	8
26	25th Floor	4	4	8
	TOTAL	**100**	**99**	**199**
	Carpet Area(sqm.)	57.896	57.796	
	Total Carpet Area of each Type	5789.60	5721.80	
TOTAL CARPET AREA OF EACHTOWER(sqm.)=			**11511.40**	
	Balcony Area 2A UNITS	**=**	**630.42**	
	Balcony Area 2B UNITS	**=**	**1094.93**	
TOTAL BALCONY AREA OF EACH TOWER (sqm.)=			**1725.35**	
TOTAL CARPET AREA OF TOWER 3 & 4(sqm.)=			**23022.81**	
TOTAL BALCONY AREA OF TOWER 3 & 4 (sqm.)=			**3450.69**	

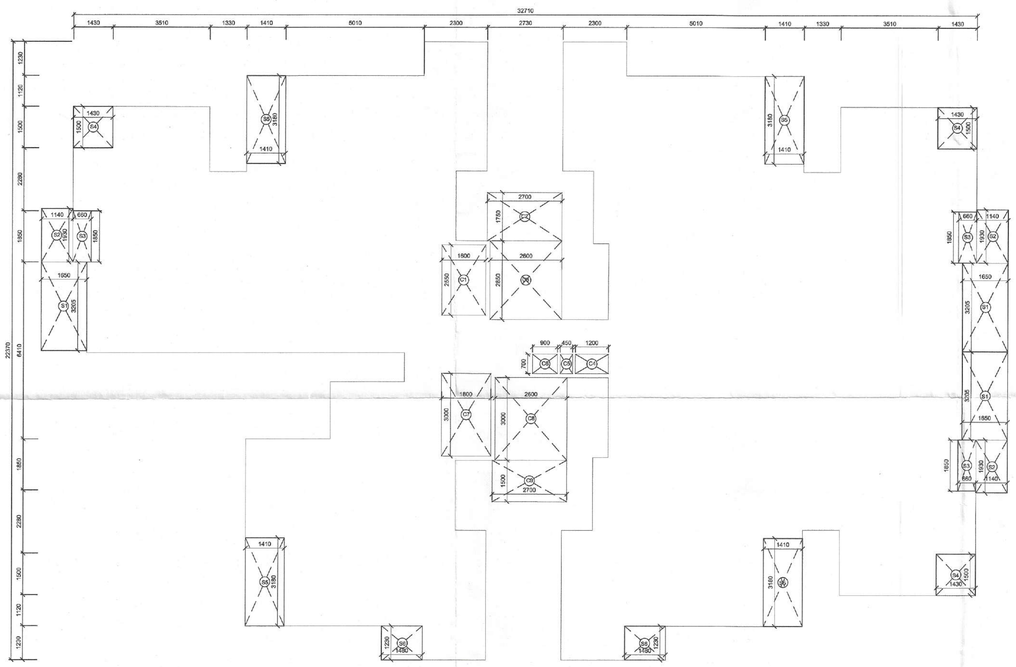

2 21st Floor Area Balcony & Less Area 1 Detail - Tower 2

Director (H.Q.) S.T.P. Member Secretary B.P.C. S.T.P.(Q) Member Secretary B.P.C. C.T.P.(G) Member B.P.C. C.T.P.(Hq.) Chairman B.P.C.

DINESH KUMAR SD (HQ)

JD PA

DDA(HQ) Member BPAC

LEGEND

	110 OD SWR PVC SOIL & VENT PIPE
	110 OD SWR PVC WASTE & VENT PIPE
	110 OD SWR PVC ANTI-SYPHONIC PIPE
	50ø CWS RISER TO O.H.T. FILLING TANK
	50ø FWS RISER TO O.H.T. FILLING TANK
	DOMESTIC WATER SUPPLY DN. TAKE PIPE
	FLUSHING WATER SUPPLY DN. TAKE PIPE
	110 OD uPVC RAIN WATER PIPE(TERRACE)
	110 OD uPVC RAIN WATER PIPE(BALCONY)

LEGEND:-

FHC	FIRE HOSE CABINET
	9 Ltr WATER GAS PRESSURE TYPE FIRE EXTINGUISHER
	4.5 kg CO2 TYPE FIRE EXTINGUISHER
M	BUTTERFLY VALVE / SLUICE VALVE

NOTE:-

EACH FIRE HOSE CABINET SHALL CONSIST OF
1 No. – GUNMETAL SINGLE HEADED HYDRANT VALVE (63mm).
2 Nos. – FIRE HOSES 63mm 15M LONG WITH ACCESSORIES.
1 No. – SHORT BRANCH
1 No. – FIRST AID HOSE REEL
2 Nos. – FIRE EXTINGUISHERS
1 No. – FIRE MAN'S AXE.

PROJECT TITLE

PROPOSED BUILDING PLANS OF AFFORDABLE GROUP HOUSING COLONY FOR AN AREA MEASURING 10.0 ACRES(AN AREA MEASURING 9.5875 ACRES OUT OF 11.381 ACRES UNDER MIGRATION FROM PART OF LICENCE NO.102 OF 2010 DATED 02.12.2010 AND FRESHLY APPLIED AREA MEASURING 0.4125 ACRES IN SECTOR 106, GURUGRAM) BEING DEVELOPED BY K.N. INFRACON PRIVATE LIMITED

OWNER's SIGNATURE

K.N. INFRACON PVT. LTD. DELHI

ARCHITECT's SIGNATURE

AVANIKA VASHISTH CA/2013/91670

DRAWING TITLE

TOWER 3 & 4
AREA DIAGRAMS + CARPET AREA
TYPE 2A+2B (2 BHK)

ARCHITECTS

MRG DESIGN TEAM
MRG World
Vatika Tower, Golf Course Road
Gurugram

DATE	JAN 2021	DWG. NO.
SCALE	1:100	S - 104b