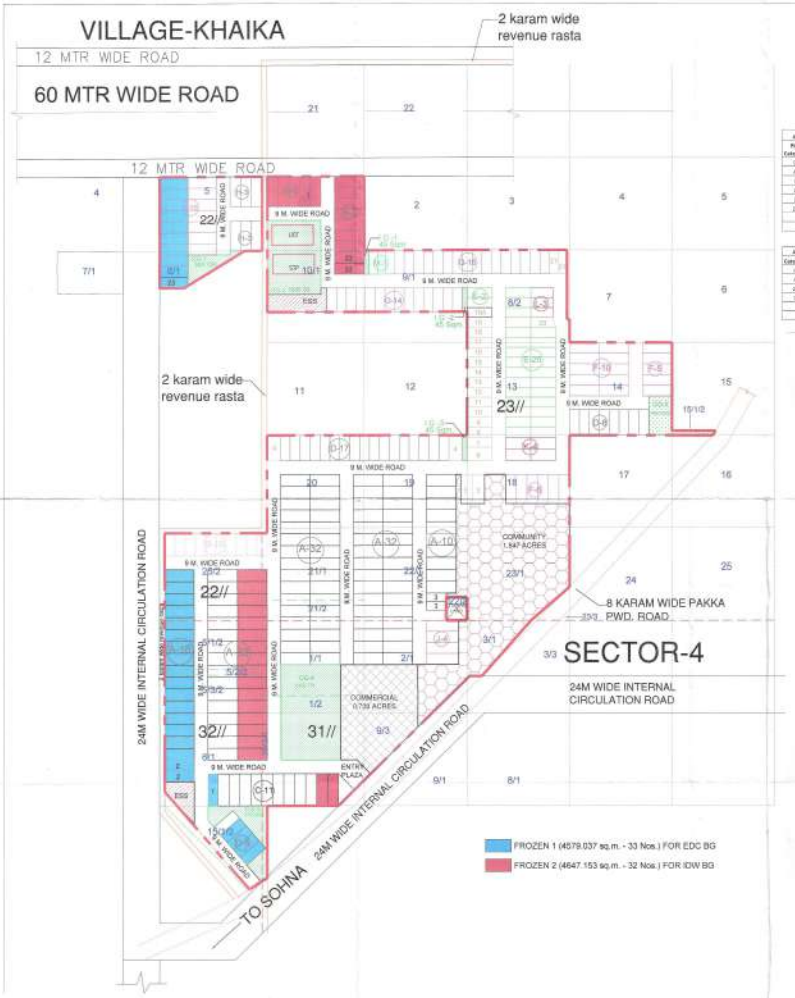

AREA DETAIL OF 10% PLOTS MORTGAGED AGAINST BG OF EDC						
Plot Category	width		length	Area (Sqm)	No. of plots	total area
D	8.5	x	16.5	140.25	4	420
A	7.75	x	18.152	140.678	16	2188.848
I	7.208	x	18.52	133.586	9	1211.897
E	7	x	18.152	127.064	2	178.928
L	9.501	x	18.501	175.7019	1	175.7019
D3				132.48	1	132.48
					33	4579.037
						10.138 %

AREA DETAIL OF 10% PLOTS MORTGAGED AGAINST BG OF IDW						
Category	width		length	Area (Sqm)	plots	total area
B	7.606	x	18.676	137.0025	12	1644.117
A	7.75	x	18.152	140.678	16	2188.848
D2	7.684	x	18.676	144.017592	3	432.0527
C	7.17	x	20.501	146.96753	1	146.7967
					32	4647.153
						10.176%

Organized Green area detail		
Green-1	246.728	Sqm
Green-2	1855.55	Sqm
Green-3	461.8112	Sqm
Green-4	2162.774	Sqm
Green-5	671.5116	Sqm
Total GAL	5397.876	Sqm

Residential Green		
RG-1	45.40	Sqm
RG-2	45.40	Sqm
RG-3	45.40	Sqm
Total G. G.	135.68	Sqm

Plot size	18.47500	Acres	
	74765.55	sq.m.	sq. yd.
plots	330	nos	
Population	4455		
density	241.1		
AREAS			
Residential	57.06%	42664.11	51026.28
Commercial	4.00%	2989.86	3575.88
TOTAL	61.06%	45653.97	54602.15
GREEN AREA			
Min. Reqd.	7.5%	5607.42	
Achieved	7.50%	5607.68	6706.79
COMMERCIAL			
Reqd.	4%	2990.62	
Provided	4.00%	2989.86	3575.88
COMMUNITY			
Reqd.	10%	7476.56	
Provided	10.00%	7478.81	8944.65

Plots Category	WIDTH m.	DEPTH m.	AREA sq.m.	AREA sq.yd. (round off)	NOS.	TOTAL AREA sq.m.	TOTAL AREA sq.yd.
A	7.75	18.152	140.68	170.37	122	17167.52	21081.22
B	6.706	18.707	125.23	150.48	128.68	832.70	1186.78
C	7.17	20.501	147.07	175.24	176.24	11	3448.64	4171.61
D	8.5	16.5	140.25	169.27	126.27	30	4217.50	5088.14
E	8.5	18.152	154.29	187.52	187.52	18	2878.08	3446.37
F	6.97	18.152	134.86	161.32	161.32	21	2832.18	3387.74
G	6.836	19.028	98.94	118.34	118.34	30	2968.29	3550.07
H	7.908	18.676	147.64	180.84	180.84	18	2580.17	3087.08
I	7.208	18.52	133.57	160.94	160.94	10	1339.08	1579.88
J	7.3	20.4	149.78	179.11	179.08	8	599.64	718.45
K	7.942	18.152	122.33	147.50	154.25	4	493.31	590.00
L	9.5	18.676	95.39	114.02	114.09	3	288.10	342.27
M	5.967	13.528	80.33	101.01	101.01	2	200.80	241.00
I	5.903	20.501	121.00	152.51	151.92	1	151.85	182.52
J	7	18.152	130.46	161.81	161.46	2	270.93	324.04
J	5.498	12.94	71.14	85.09	85.09	2	142.20	170.18
K	8.49	18.5	142.40	170.46	170.38	2	284.75	340.92
N	7.722	18.152	140.44	170.73	113.98	2	280.87	337.45
O	8.505	18.152	145.38	167.30	167.38	1	145.38	167.30
J	9.5	18.152	180.26	127.12	127.38	1	180.26	127.12
P	DED		126.85	126.84	126.84	1	126.85	126.84
Q	DED		185.77	149.30	148.92	1	185.77	148.92
R	DED		185.75	124.50	124.58	1	185.75	124.58
S	DED		185.87	126.38	126.38	1	185.87	126.38
T	DED		185.54	126.23	126.23	1	185.54	126.23
U	DED		185.81	126.38	126.38	1	185.81	126.38
V	DED		185.77	126.58	126.58	1	185.77	126.58
W	DED		185.80	126.81	126.81	1	185.80	126.81
X	DED		185.77	126.50	126.50	1	185.77	126.50
X-1	DED		185.87	126.74	126.74	1	185.87	126.74
Y	DED		78.68	116.46	116.46	1	80.88	116.46
Z1	5.837	13.014	78.03	106.04	106.04	2	177.40	212.08
Z2	7.483	23.014	148.83	175.51	175.52	2	293.46	351.21
Z3	DED		132.48	158.48	158.48	1	132.48	158.48
TOTAL					330	43664.11	51026.27

AUTHORISED SIGNATORY

For Faith Buildtech Pvt. Ltd.

Director/Auth. Signatory

ARCHITECT'S SIGNATURE

Ar Harish Kumar
B.Arch., MCA
CA-2004/23877

PROJECT:

PROPOSED DEEN DAYAL JAN AWAS YOJNA PLOTTED COLONY (DDJAY) PLAN OF AREA MEASURING 18.475 ACRES FALLING WITHIN SECTOR 4 OF DEVELOPMENT PLAN OF SOHNA 2031 BEING DEVELOPED BY FAITH BUILDTECH PVT. LTD.

SHEET TITLE	DRAWN	SCALE 1:2000
	CKD	DATE